Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
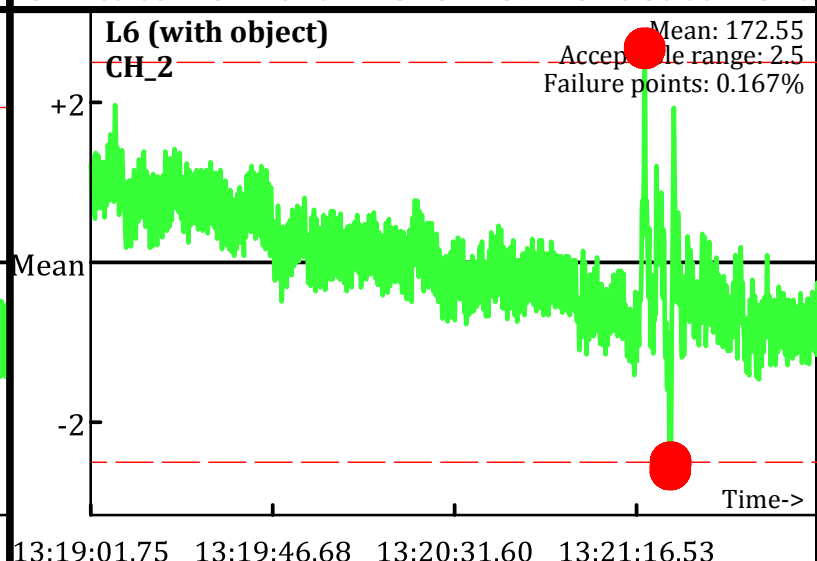--- Acceptable limits

PM test
Operator: BG & BR
Date: 7/10/2009

L5 (without object) CH_1
Mean: -32.14
Acceptable range: 2.5
Failure points: 0%

L5 (without object) CH_2
Mean: -2.16
Acceptable range: 2.5
Failure points: 0%

L6 (with object) CH_1
Mean: 209.42
Acceptable range: 2.5
Failure points: 0.334%

L6 (with object) CH_2
Mean: 172.55
Acceptable range: 2.5
Failure points: 0.167%

L7 (without object) CH_1
Mean: -32.29
Acceptable range: 2.5
Failure points: 0%

L7 (without object) CH_2
Mean: -2.16
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\071009\QC\071009_TA_QC.gdb
Line Name: L5 L6 L7

Page: 1

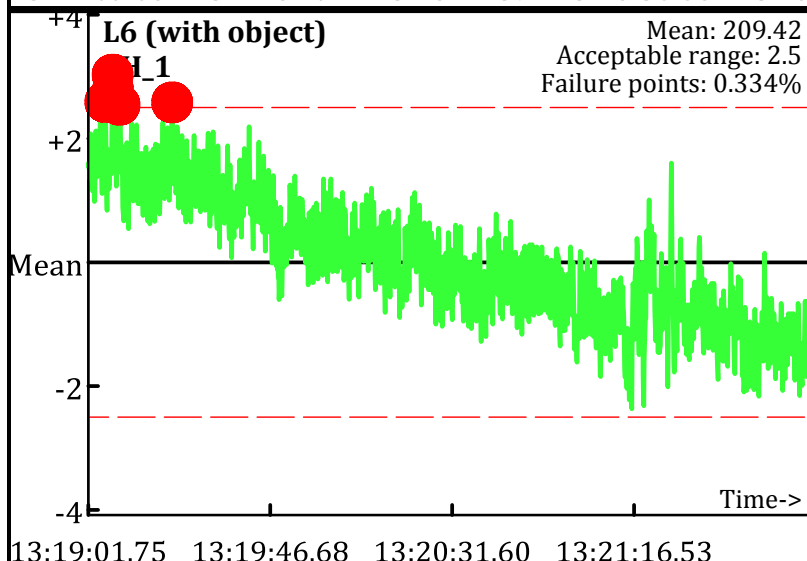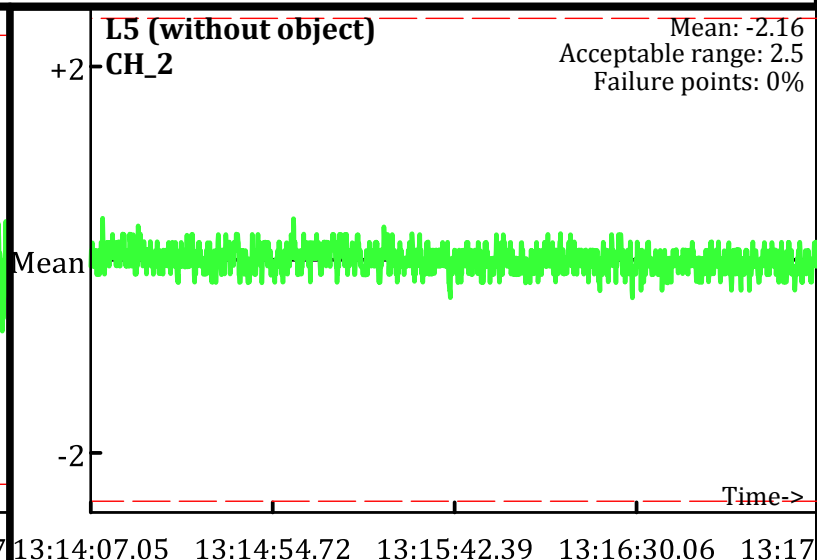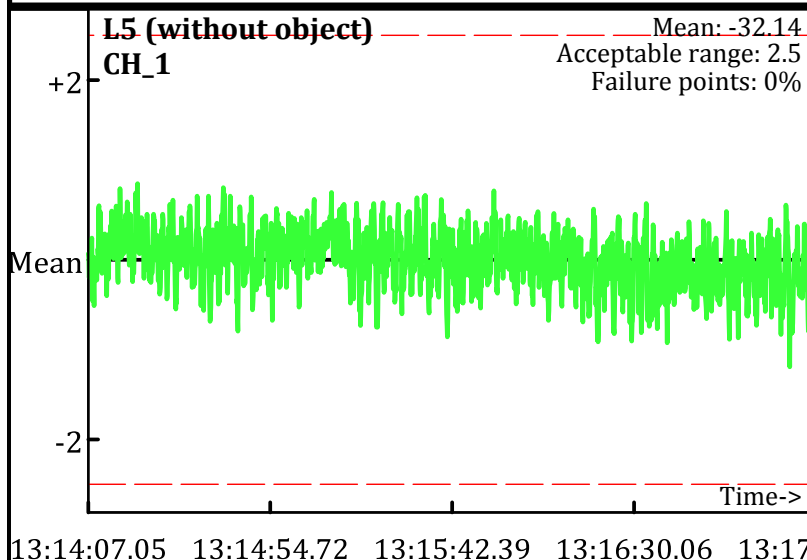# Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BR
Date: 7/10/2009

L5 (without object)
CH_3
+2
Mean
-2
Mean: -1.95
Acceptable range: 2.5
Failure points: 0%
Time->
13:14:07.05 13:14:54.72 13:15:42.39 13:16:30.06 13:17

L5 (without object)
CH_4
+2
Mean
-2
Mean: -5.92
Acceptable range: 2.5
Failure points: 0%
Time->
13:14:07.05 13:14:54.72 13:15:42.39 13:16:30.06 13:17

L6 (with object)
CH_3
+2
Mean
-2
Mean: 105.36
Acceptable range: 2.5
Failure points: 0%
Time->
13:19:01.75 13:19:46.68 13:20:31.60 13:21:16.53

L6 (with object)
CH_4
+2
Mean
-2
Mean: 48.52
Acceptable range: 2.5
Failure points: 0%
Time->
13:19:01.75 13:19:46.68 13:20:31.60 13:21:16.53

L7 (without object)
CH_3
+2
Mean
-2
Mean: -1.93
Acceptable range: 2.5
Failure points: 0%
Time->
13:23:03.55 13:23:17.99 13:23:32.44 13:23:46.88 13:24

L7 (without object)
CH_4
+2
Mean
-2
Mean: -5.93
Acceptable range: 2.5
Failure points: 0%
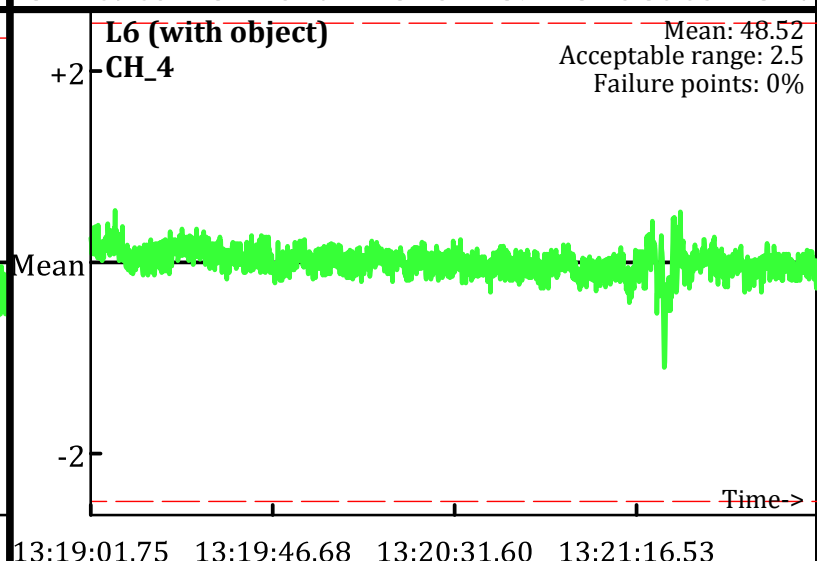Time->
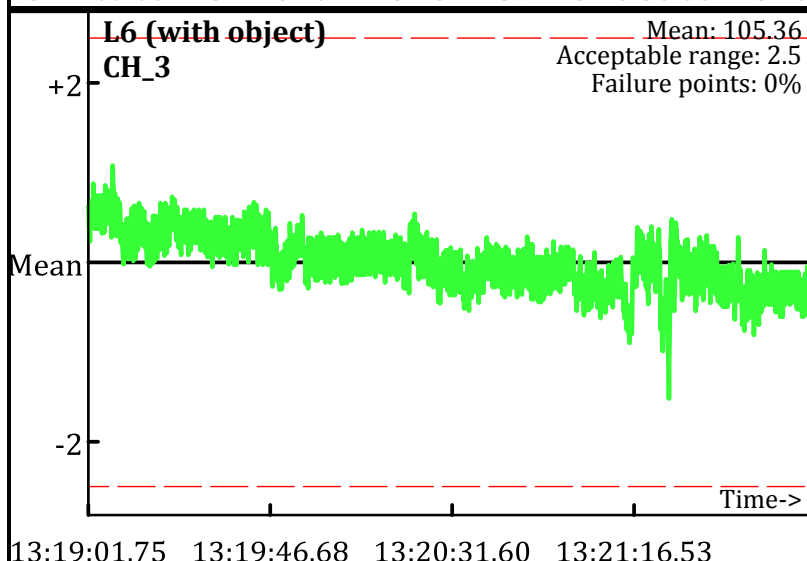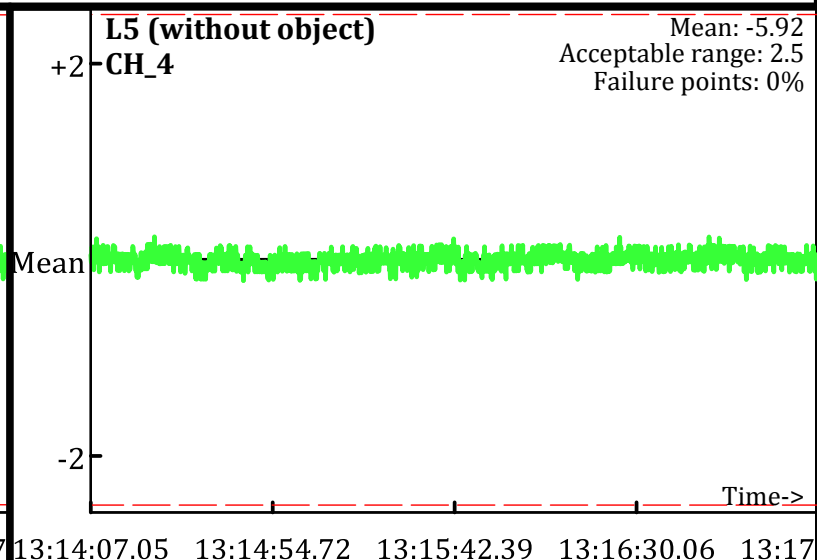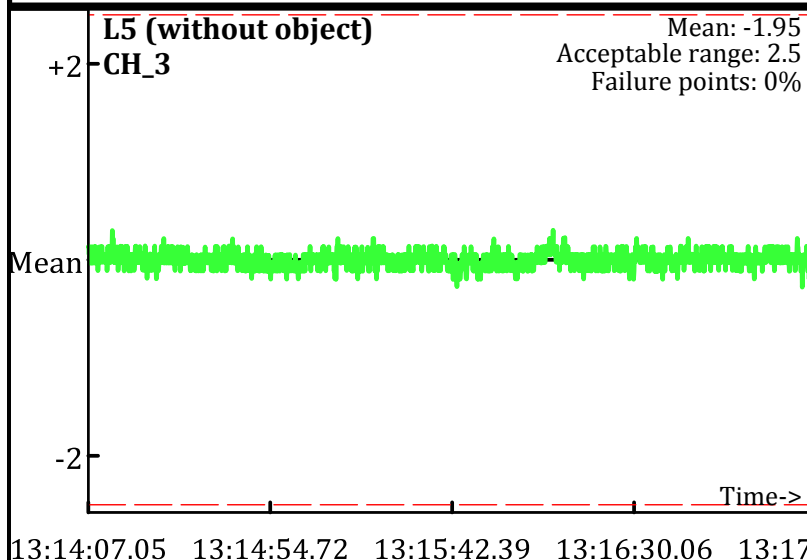13:23:03.55 13:23:17.99 13:23:32.44 13:23:46.88 13:24

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
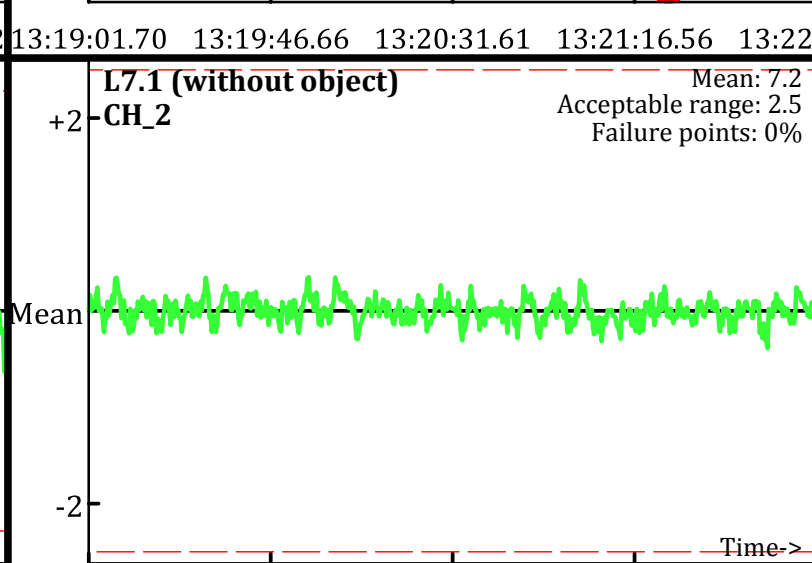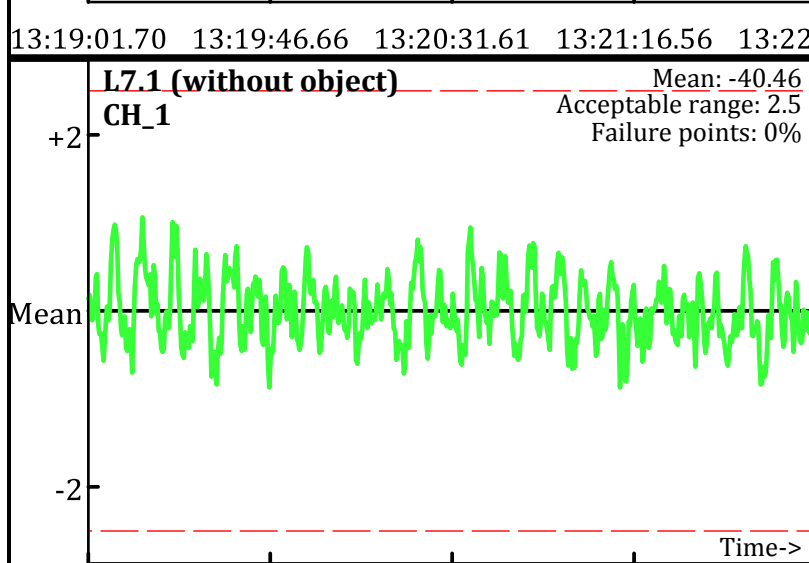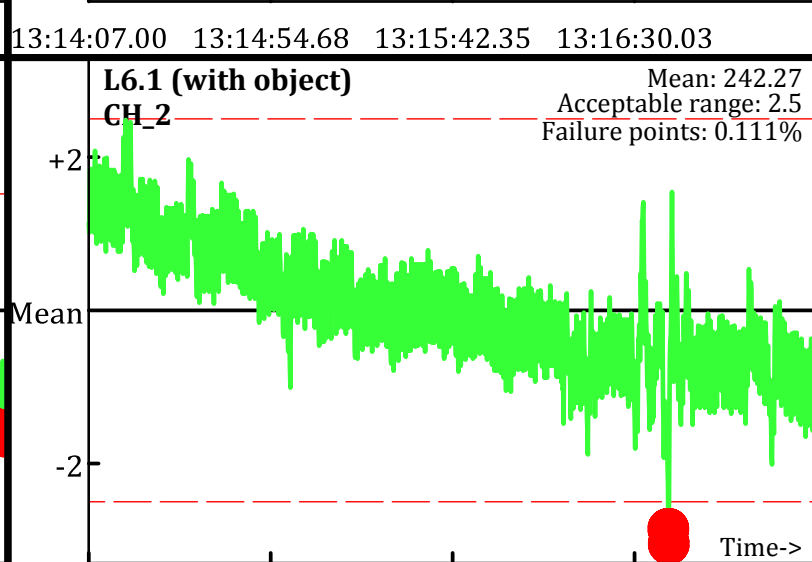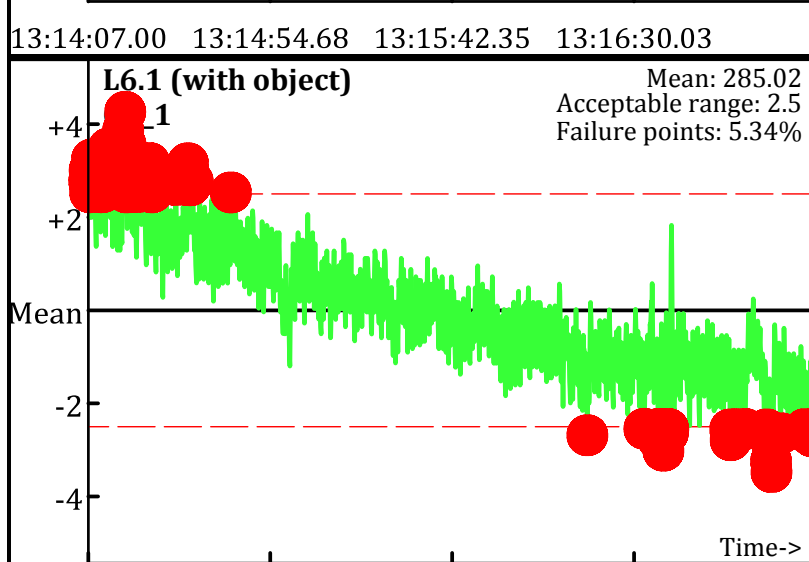Operator: BG & BR
Date: 7/10/2009

L5.1 (without object)
CH_1
Mean: -39.93
Acceptable range: 2.5
Failure points: 0%

L5.1 (without object)
CH_2
Mean: 7.28
Acceptable range: 2.5
Failure points: 0%

13:14:07.00 13:14:54.68 13:15:42.35 13:16:30.03
13:14:07.00 13:14:54.68 13:15:42.35 13:16:30.03

L6.1 (with object)
_1
Mean: 285.02
Acceptable range: 2.5
Failure points: 5.34%

L6.1 (with object)
CH_2
Mean: 242.27
Acceptable range: 2.5
Failure points: 0.111%

13:19:01.70 13:19:46.66 13:20:31.61 13:21:16.56 13:22
13:19:01.70 13:19:46.66 13:20:31.61 13:21:16.56 13:22

L7.1 (without object)
CH_1
Mean: -40.46
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_2
Mean: 7.2
Acceptable range: 2.5
Failure points: 0%

13:23:03.51 13:23:17.99 13:23:32.46 13:23:46.93
13:23:03.51 13:23:17.99 13:23:32.46 13:23:46.93

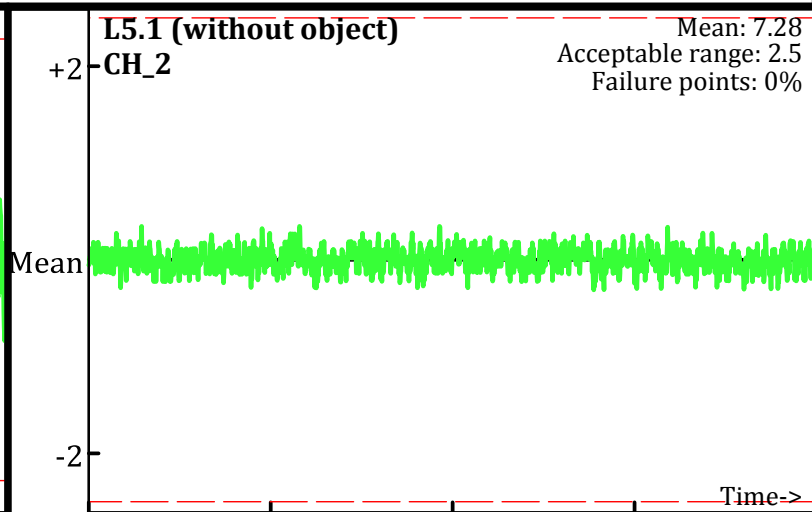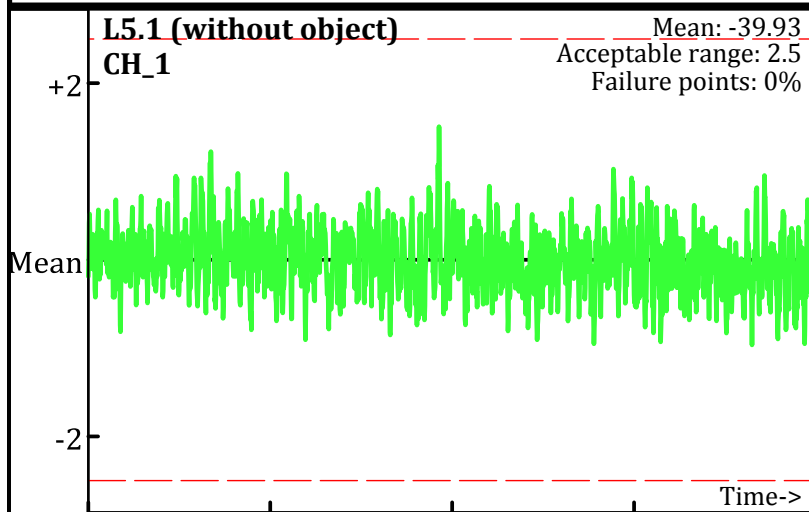Database: C:_QCReports_Ord_Data\071009\QC\071009_TA_QC.gdb
Line Name: L5.1 L6.1 L7.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – Acceptable limits

PM test
Operator: BG & BR
Date: 7/10/2009

L5.1 (without object)
CH_3
Mean: 5.49
Acceptable range: 2.5
Failure points: 0%

L5.1 (without object)
CH_4
Mean: -1.96
Acceptable range: 2.5
Failure points: 0%

L6.1 (with object)
CH_3
Mean: 148.7
Acceptable range: 2.5
Failure points: 0%

L6.1 (with object)
CH_4
Mean: 70.39
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_3
Mean: 5.5
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_4
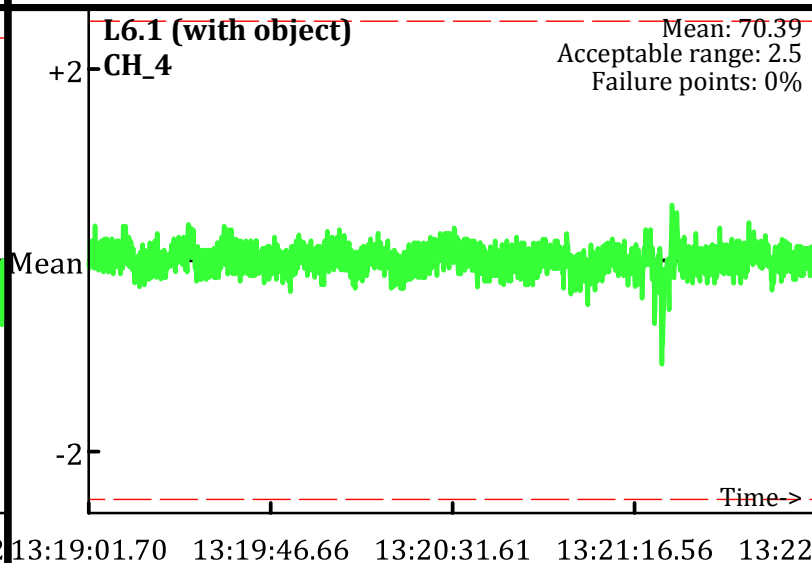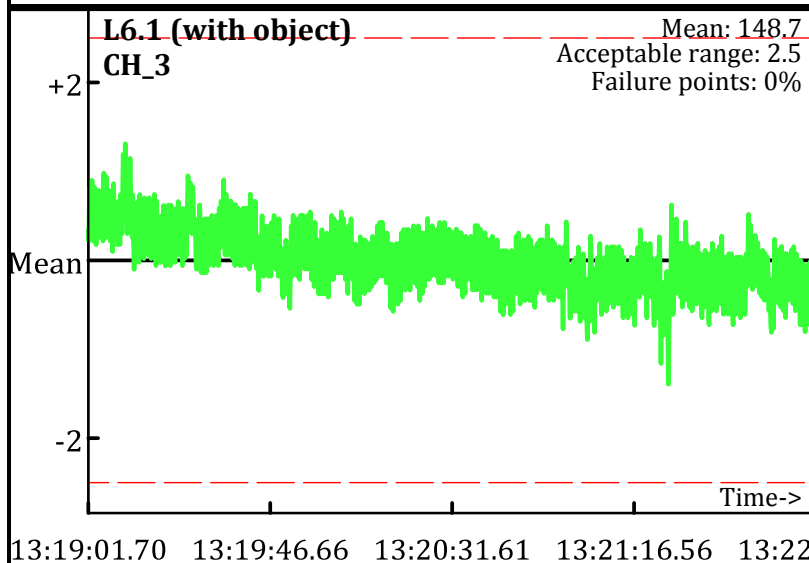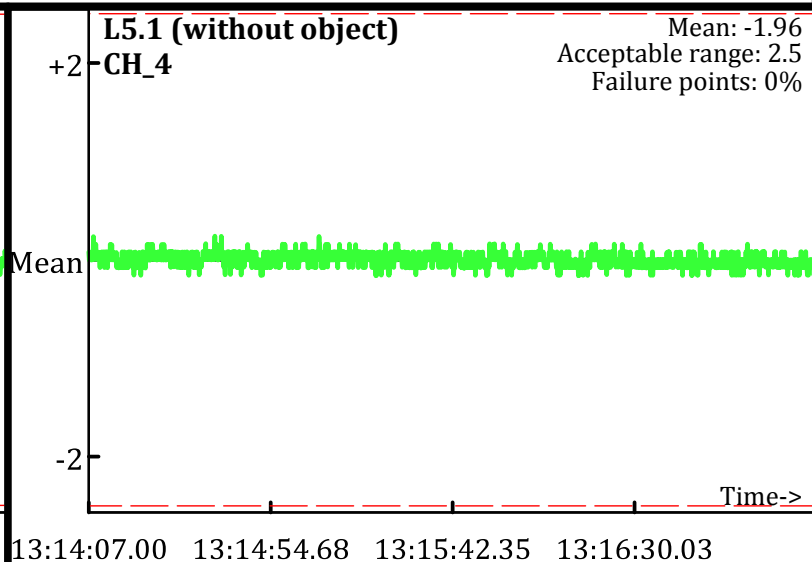Mean: -1.96
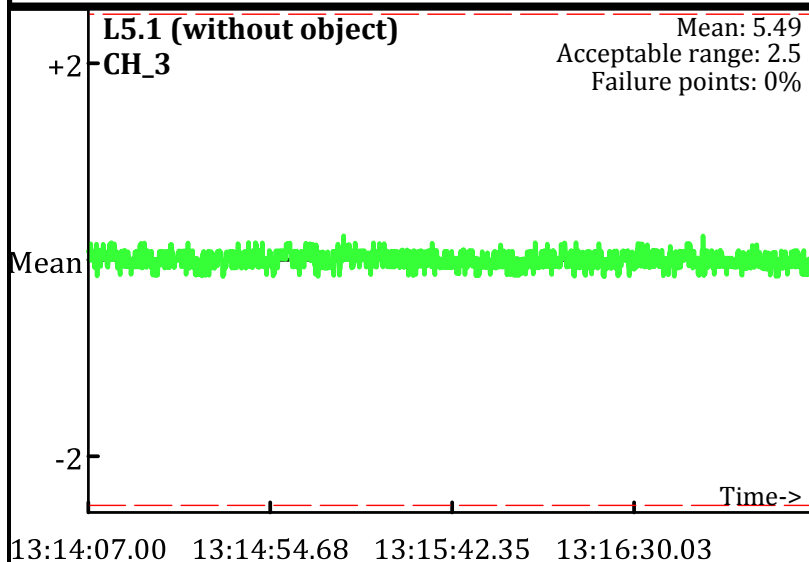Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
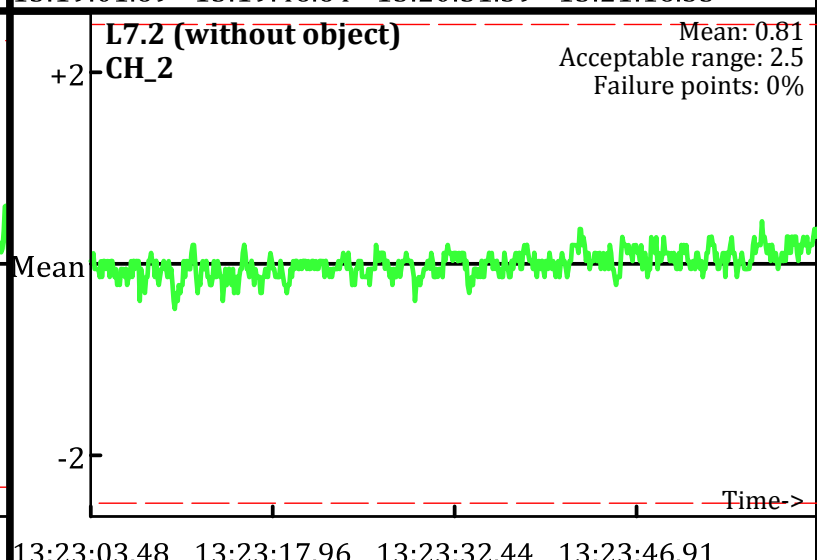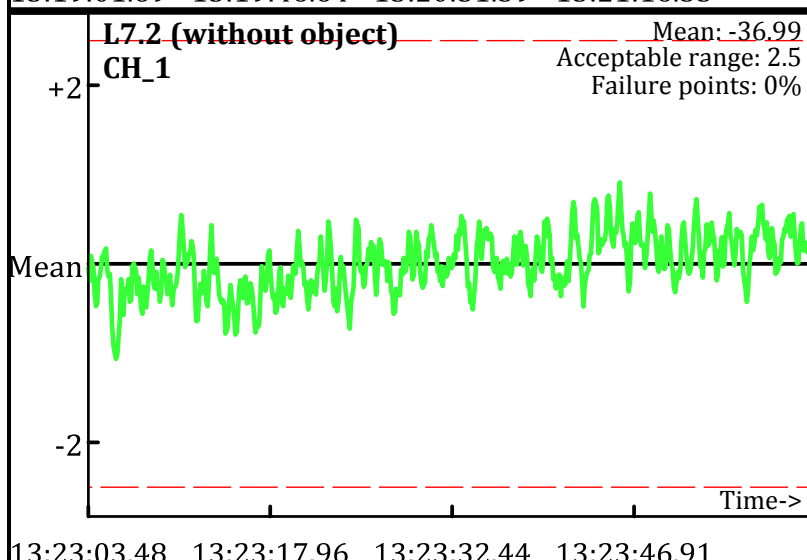Operator: BG & BR
Date: 7/10/2009

L5.2 (without object)
CH_1
Mean: -37.8
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

13:14:06.98 13:14:54.66 13:15:42.34 13:16:30.01

L5.2 (without object)
CH_2
Mean: 0.27
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

13:14:06.98 13:14:54.66 13:15:42.34 13:16:30.01

L6.2 (with object)
CH_1
Mean: 157.92
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

13:19:01.69 13:19:46.64 13:20:31.59 13:21:16.53

L6.2 (with object)
CH_2
Mean: 139.04
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

13:19:01.69 13:19:46.64 13:20:31.59 13:21:16.53

L7.2 (without object)
CH_1
Mean: -36.99
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

13:23:03.48 13:23:17.96 13:23:32.44 13:23:46.91

L7.2 (without object)
CH_2
Mean: 0.81
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
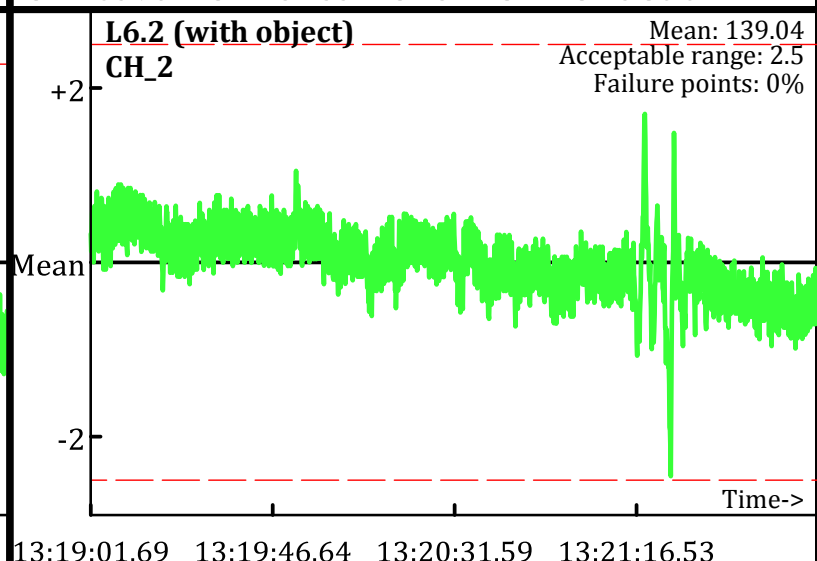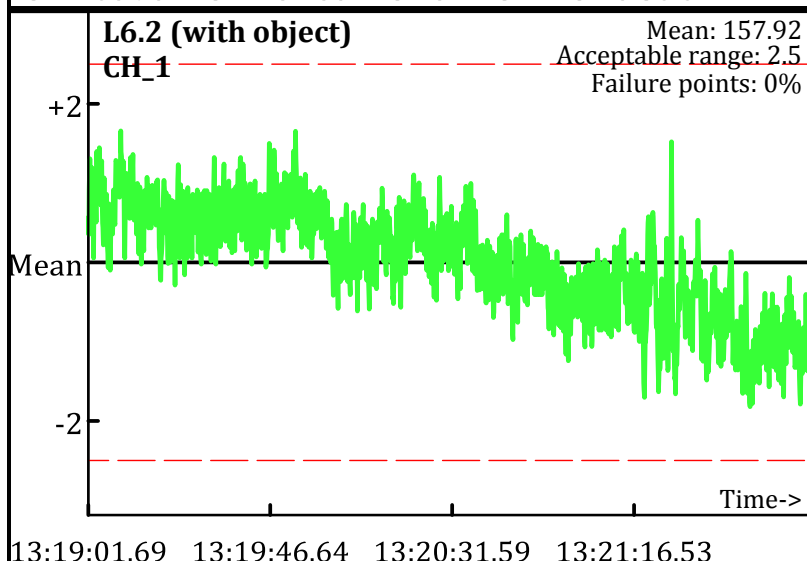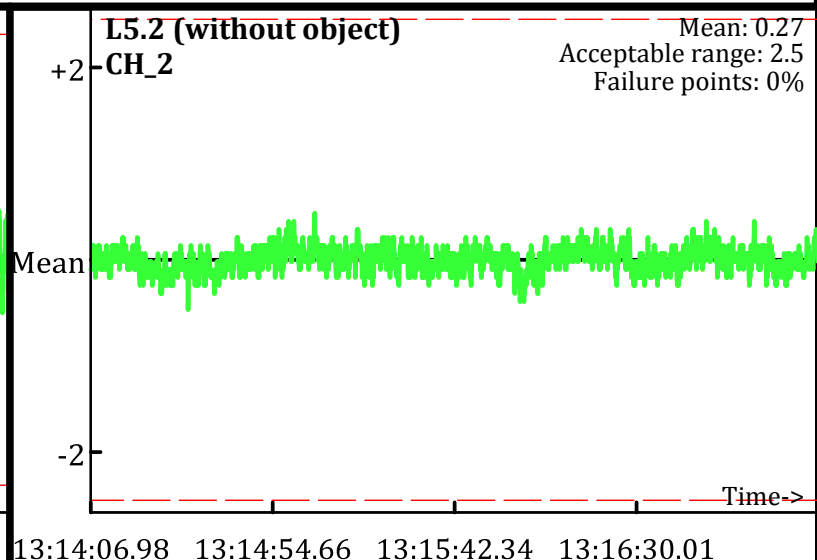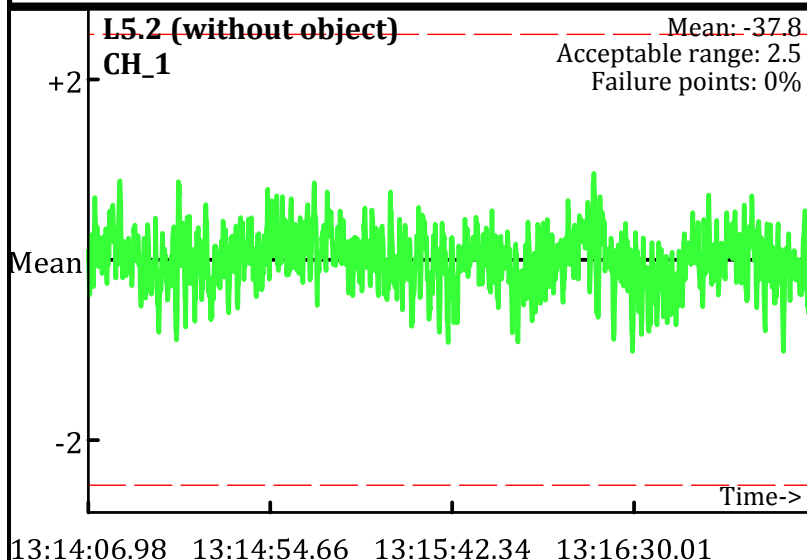
13:23:03.48 13:23:17.96 13:23:32.44 13:23:46.91

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits

PM test
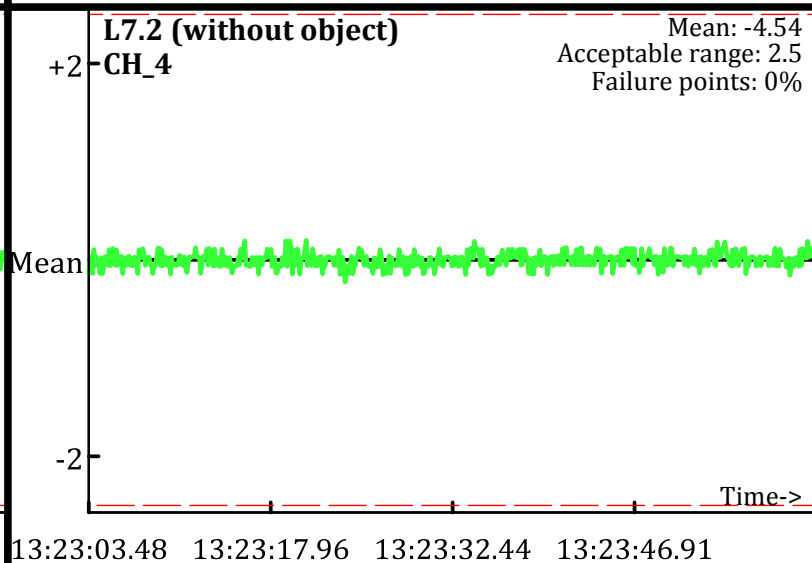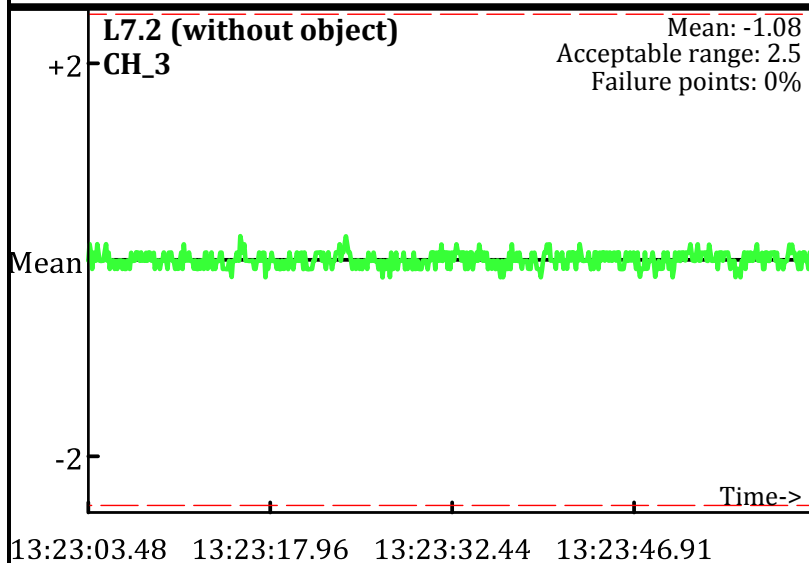Operator: BG & BR
Date: 7/10/2009

L5.2 (without object)
CH_3
Mean: -1.27
Acceptable range: 2.5
Failure points: 0%

L5.2 (without object)
CH_4
Mean: -4.58
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_3
Mean: 82.17
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_4
Mean: 37.14
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_3
Mean: -1.08
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_4
Mean: -4.54
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\071009\QC\071009_TA_QC.gdb
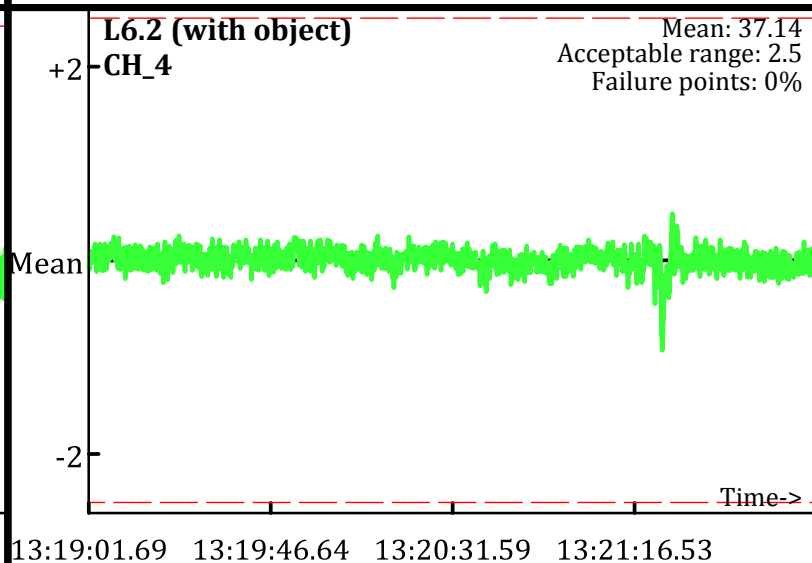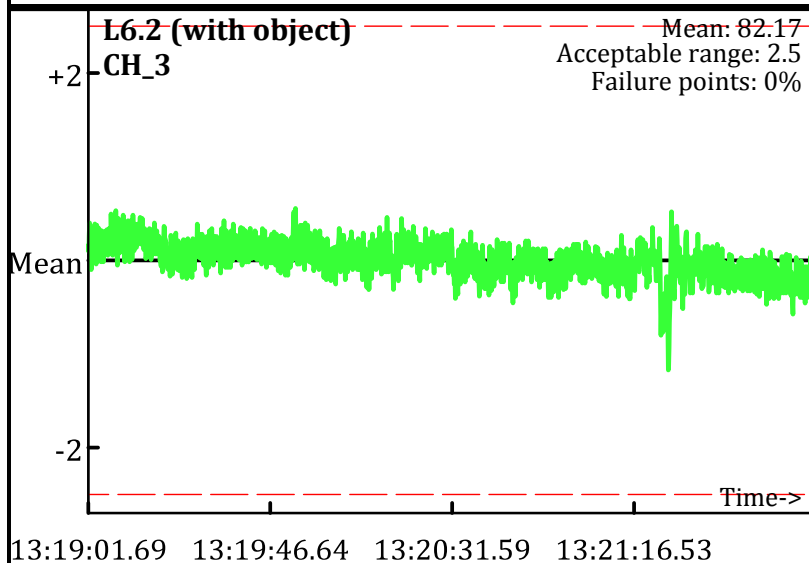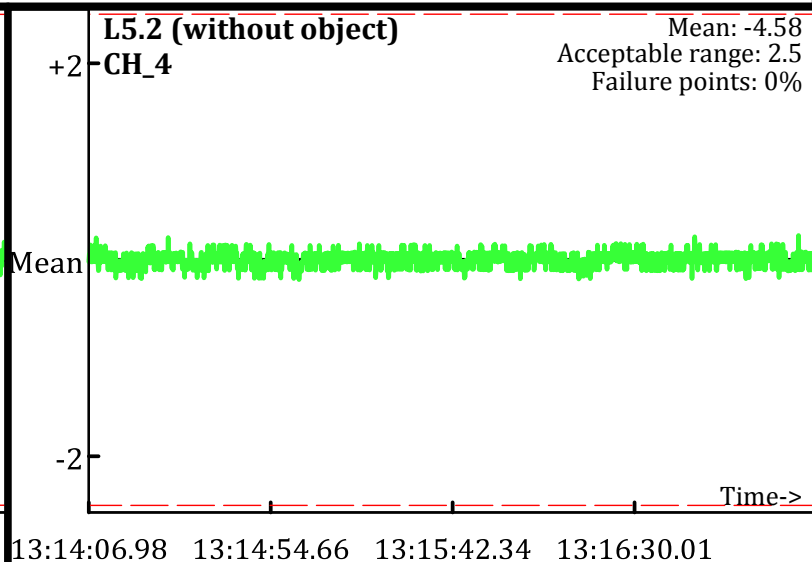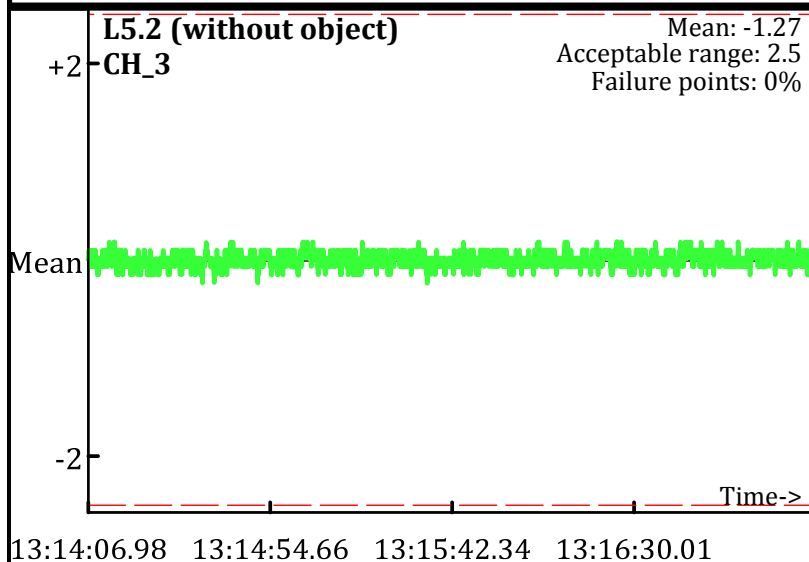Line Name: L5.2 L6.2 L7.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
-- Acceptable limits

AM test
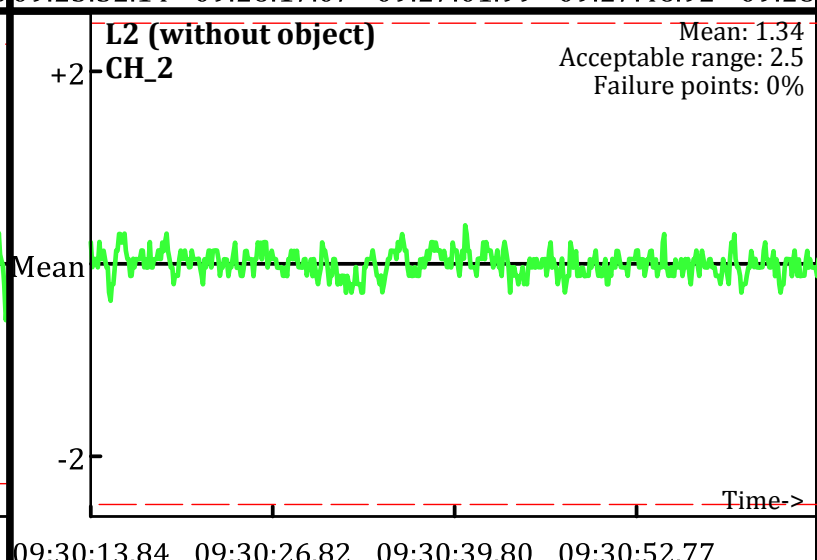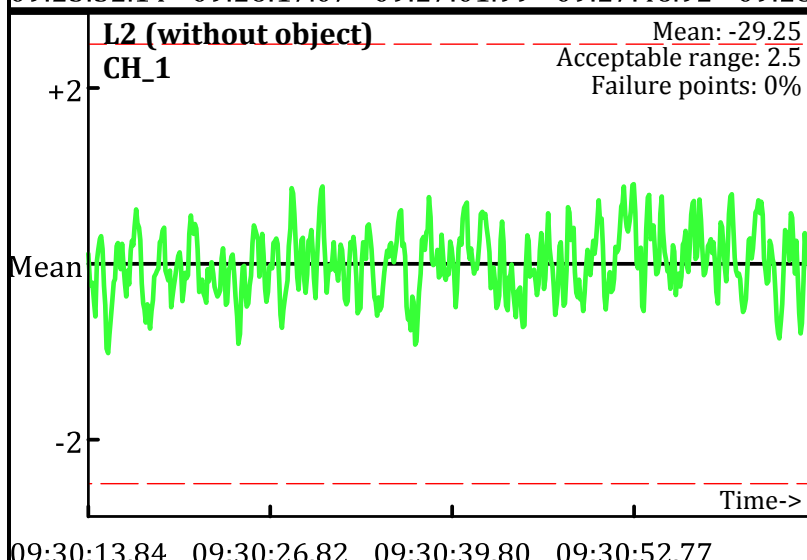Operator: BG & PAZ
Date: 7/13/2009

L0 (without object)
CH_1
Mean: -30.04
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:20:01.44   09:20:49.36   09:21:37.29   09:22:25.21

L0 (without object)
CH_2
Mean: 1.35
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:20:01.44   09:20:49.36   09:21:37.29   09:22:25.21

L1 (with object)
CH_1
Mean: 156.74
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:32.14   09:26:17.07   09:27:01.99   09:27:46.92   09:28

L1 (with object)
CH_2
Mean: 134.65
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:32.14   09:26:17.07   09:27:01.99   09:27:46.92   09:28

L2 (without object)
CH_1
Mean: -29.25
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:30:13.84   09:30:26.82   09:30:39.80   09:30:52.77

L2 (without object)
CH_2
Mean: 1.34
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:30:13.84   09:30:26.82   09:30:39.80   09:30:52.77

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
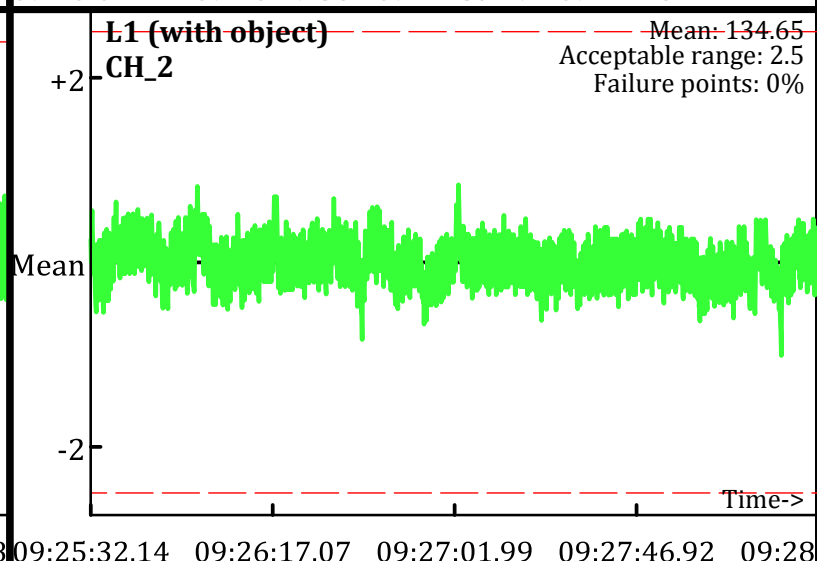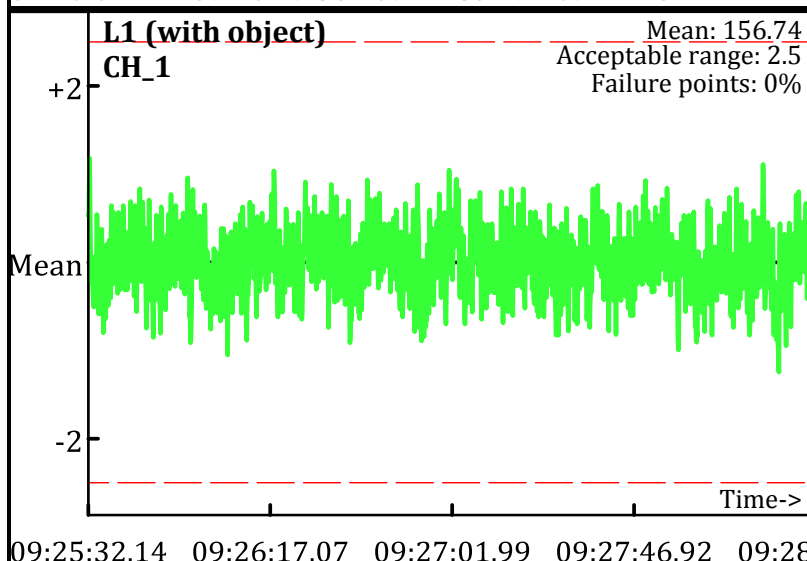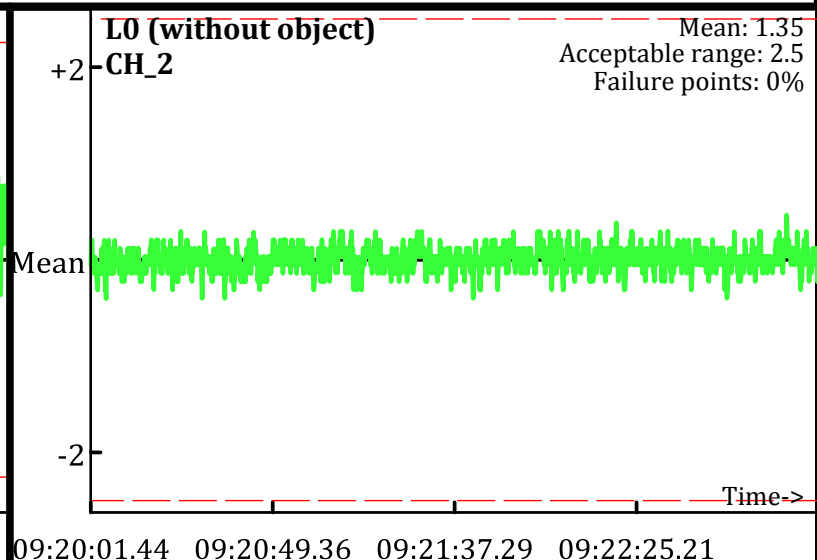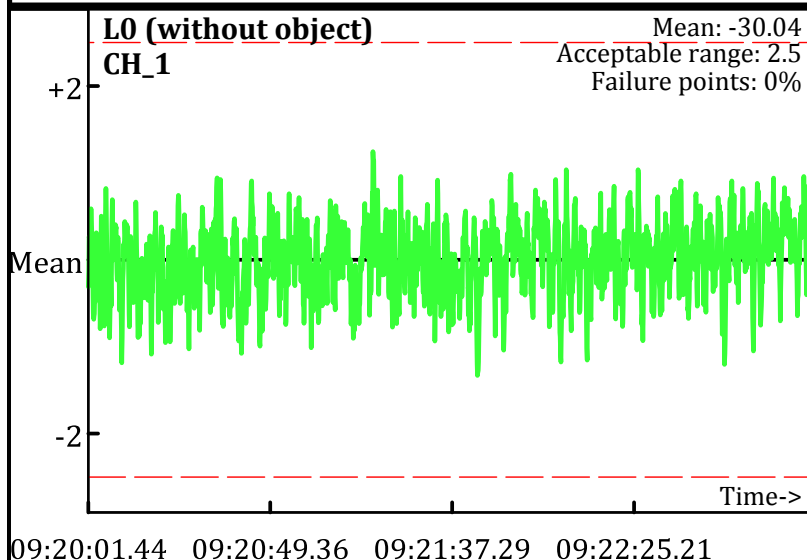Line Name: L0 L1 L2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
— — — Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/13/2009
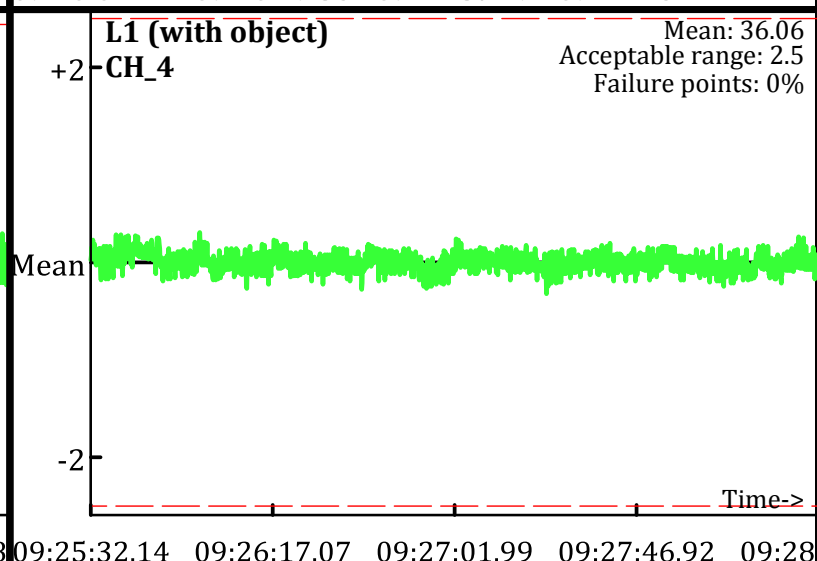

L0 (without object)
CH_3
Mean: -0.043
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:20:01.44   09:20:49.36   09:21:37.29   09:22:25.21

L0 (without object)
CH_4
Mean: -5.23
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:20:01.44   09:20:49.36   09:21:37.29   09:22:25.21

L1 (with object)
CH_3
Mean: 81.3
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:32.14   09:26:17.07   09:27:01.99   09:27:46.92   09:28

L1 (with object)
CH_4
Mean: 36.06
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:32.14   09:26:17.07   09:27:01.99   09:27:46.92   09:28

L2 (without object)
CH_3
Mean: -0.084
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:30:13.84   09:30:26.82   09:30:39.80   09:30:52.77

L2 (without object)
CH_4
Mean: -5.3
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:30:13.84   09:30:26.82   09:30:39.80   09:30:52.77

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
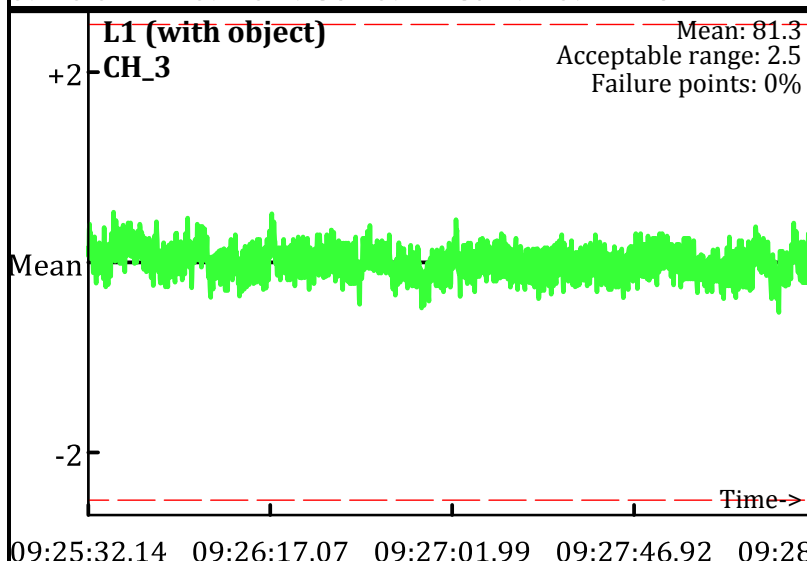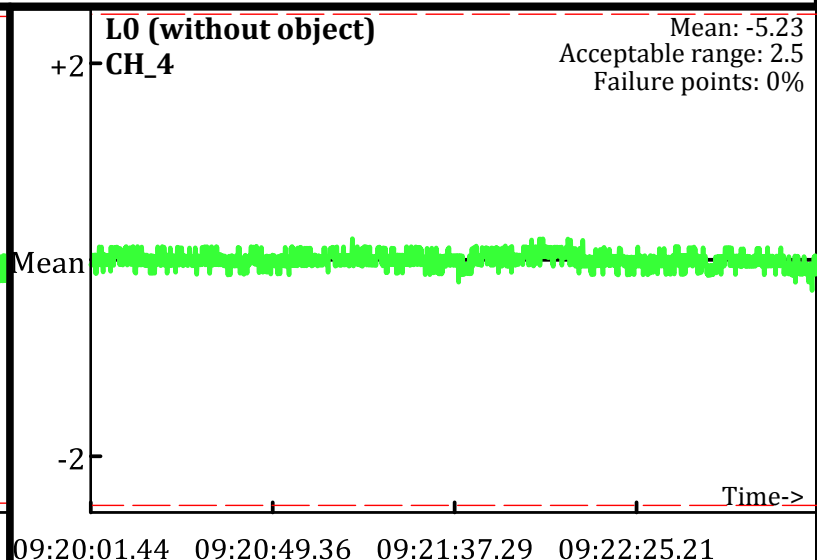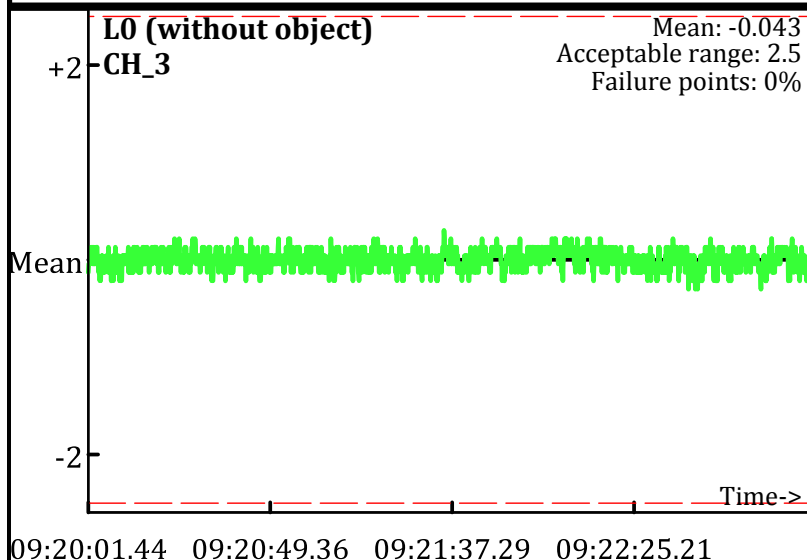Line Name: L0 L1 L2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
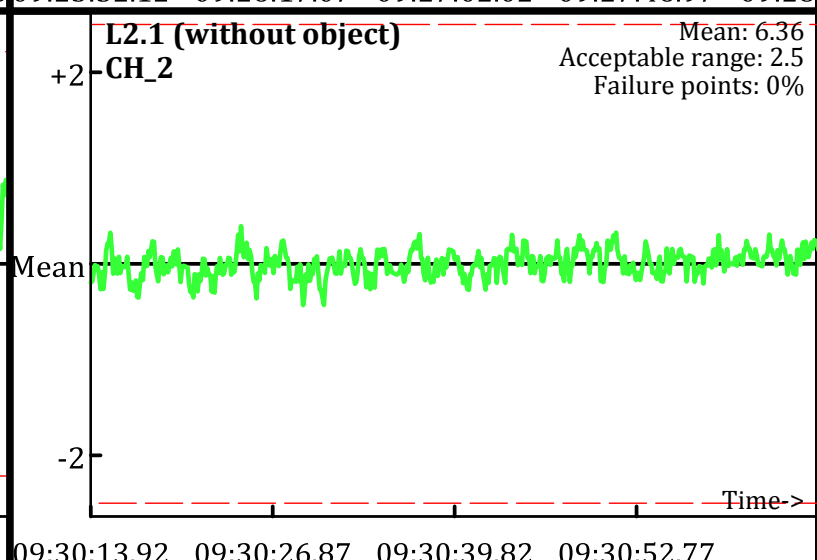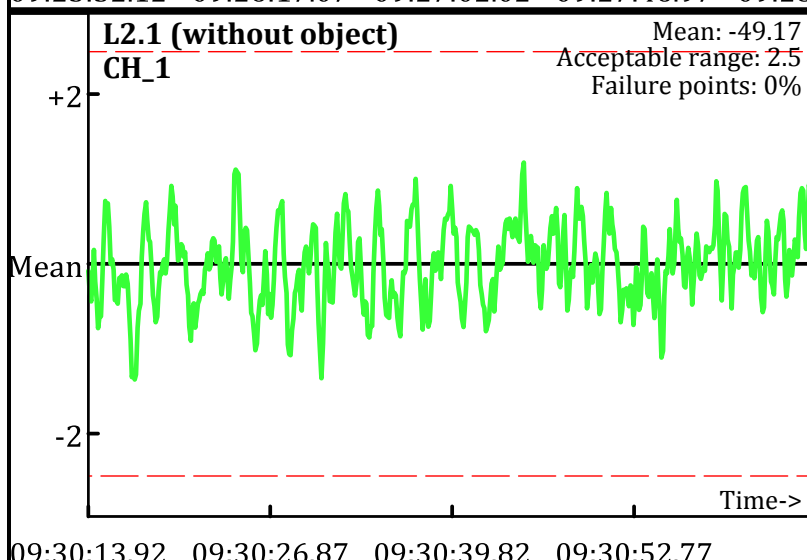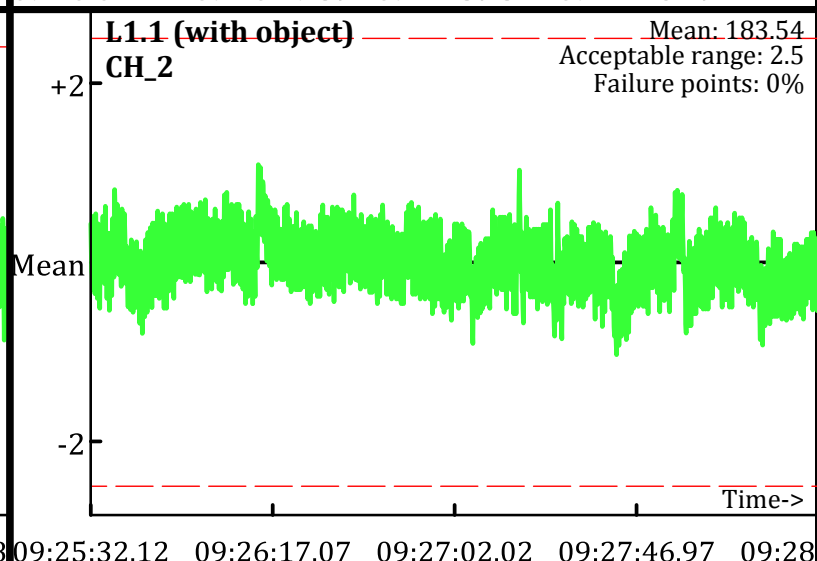Operator: BG & PAZ
Date: 7/13/2009

L0.1 (without object)
CH_1
Mean: -50.79
Acceptable range: 2.5
Failure points: 0%

09:20:01.42 09:20:49.37 09:21:37.32 09:22:25.27

L0.1 (without object)
CH_2
Mean: 6.15
Acceptable range: 2.5
Failure points: 0%

09:20:01.42 09:20:49.37 09:21:37.32 09:22:25.27

L1.1 (with object)
CH_1
Mean: 196.73
Acceptable range: 2.5
Failure points: 0%

09:25:32.12 09:26:17.07 09:27:02.02 09:27:46.97 09:28

L1.1 (with object)
CH_2
Mean: 183.54
Acceptable range: 2.5
Failure points: 0%

09:25:32.12 09:26:17.07 09:27:02.02 09:27:46.97 09:28

L2.1 (without object)
CH_1
Mean: -49.17
Acceptable range: 2.5
Failure points: 0%

09:30:13.92 09:30:26.87 09:30:39.82 09:30:52.77

L2.1 (without object)
CH_2
Mean: 6.36
Acceptable range: 2.5
Failure points: 0%

09:30:13.92 09:30:26.87 09:30:39.82 09:30:52.77

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
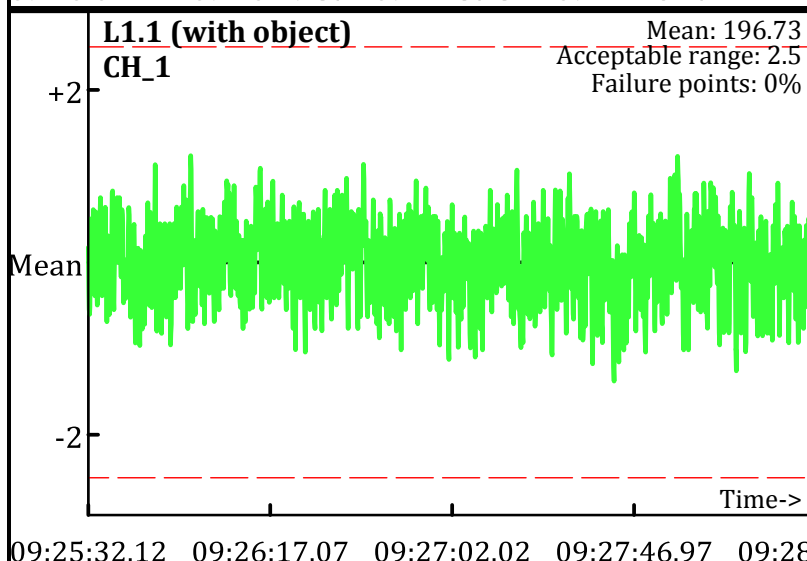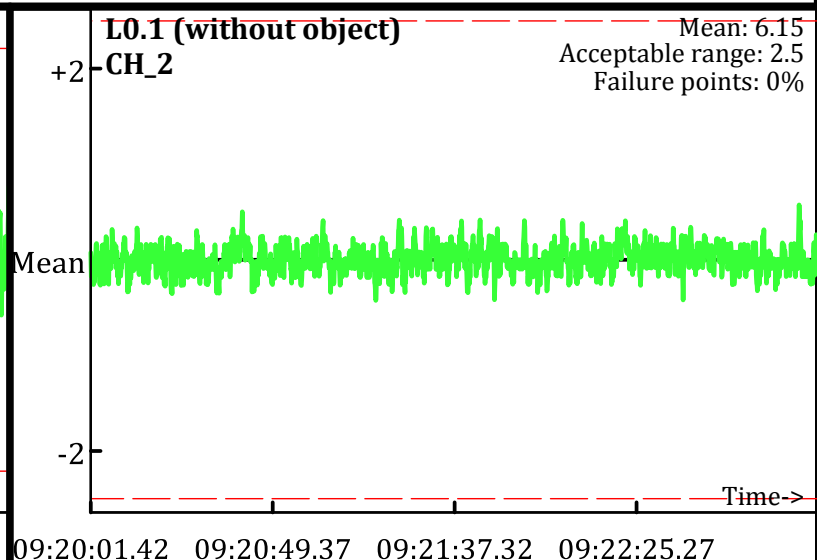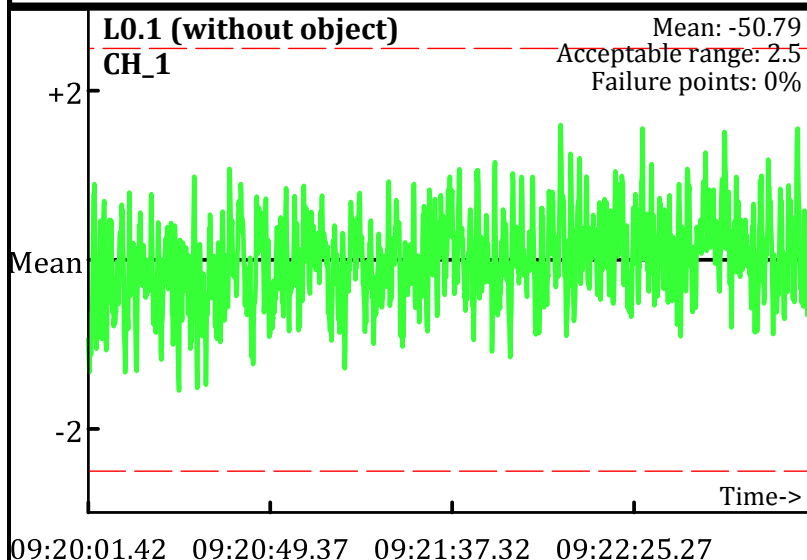-- Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/13/2009
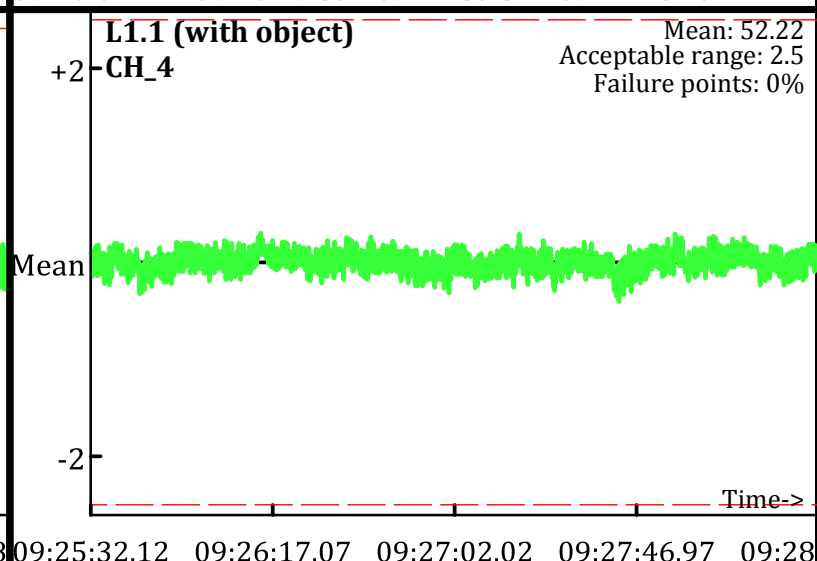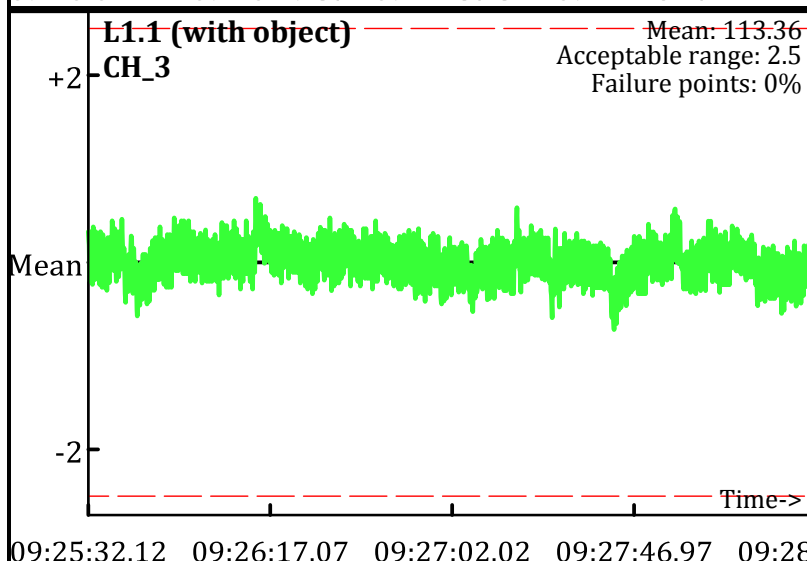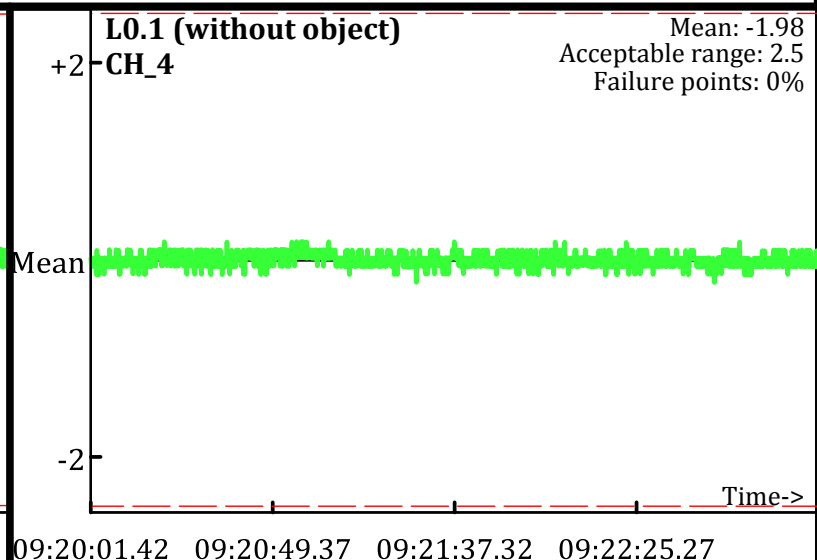
L0.1 (without object)
CH_3
Mean: 5.73
Acceptable range: 2.5
Failure points: 0%

L0.1 (without object)
CH_4
Mean: -1.98
Acceptable range: 2.5
Failure points: 0%

Time->
09:20:01.42 09:20:49.37 09:21:37.32 09:22:25.27

Time->
09:20:01.42 09:20:49.37 09:21:37.32 09:22:25.27

L1.1 (with object)
CH_3
Mean: 113.36
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_4
Mean: 52.22
Acceptable range: 2.5
Failure points: 0%

Time->
09:25:32.12 09:26:17.07 09:27:02.02 09:27:46.97 09:28

Time->
09:25:32.12 09:26:17.07 09:27:02.02 09:27:46.97 09:28

L2.1 (without object)
CH_3
Mean: 5.7
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_4
Mean: -2.04
Acceptable range: 2.5
Failure points: 0%

Time->
09:30:13.92 09:30:26.87 09:30:39.82 09:30:52.77

Time->
09:30:13.92 09:30:26.87 09:30:39.82 09:30:52.77

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
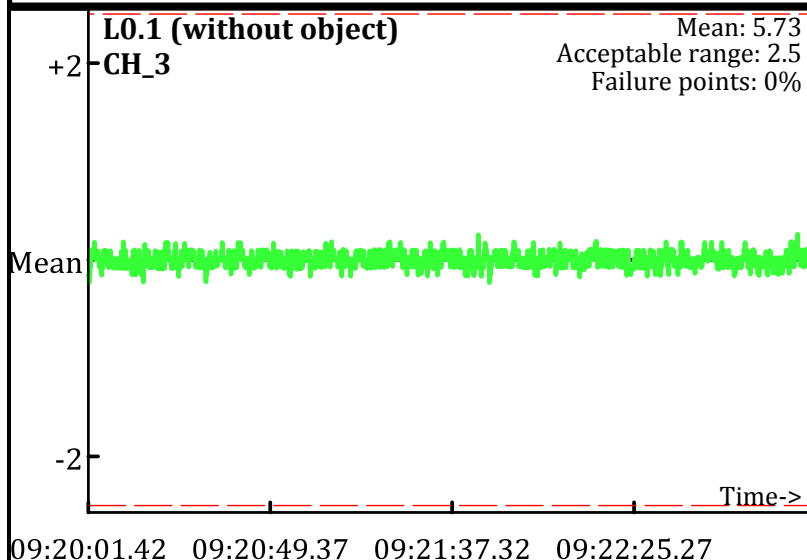Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
- - - Acceptable limits

AM test
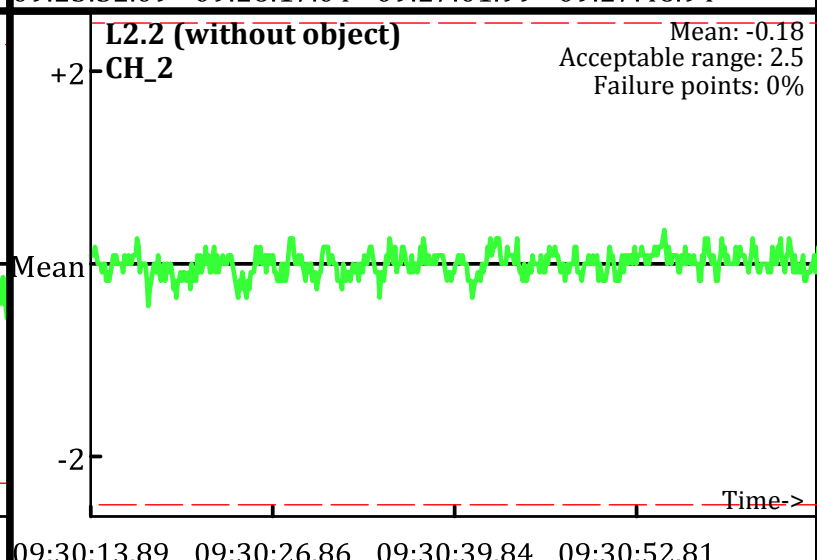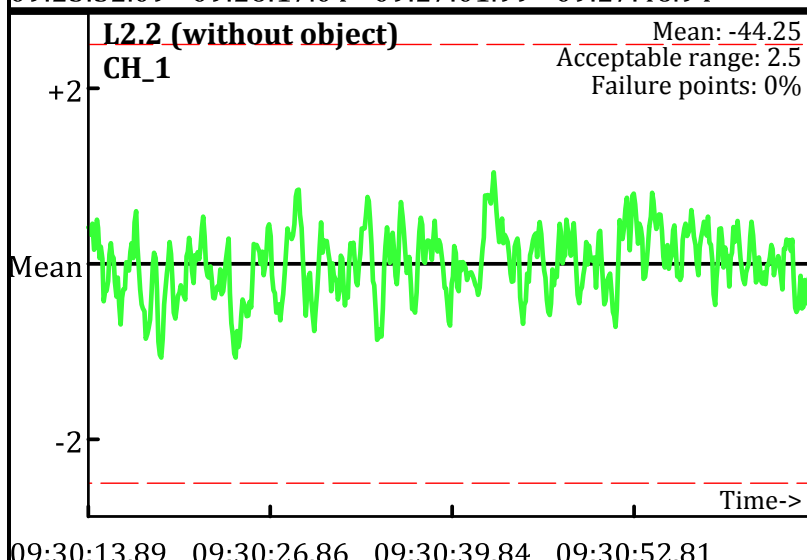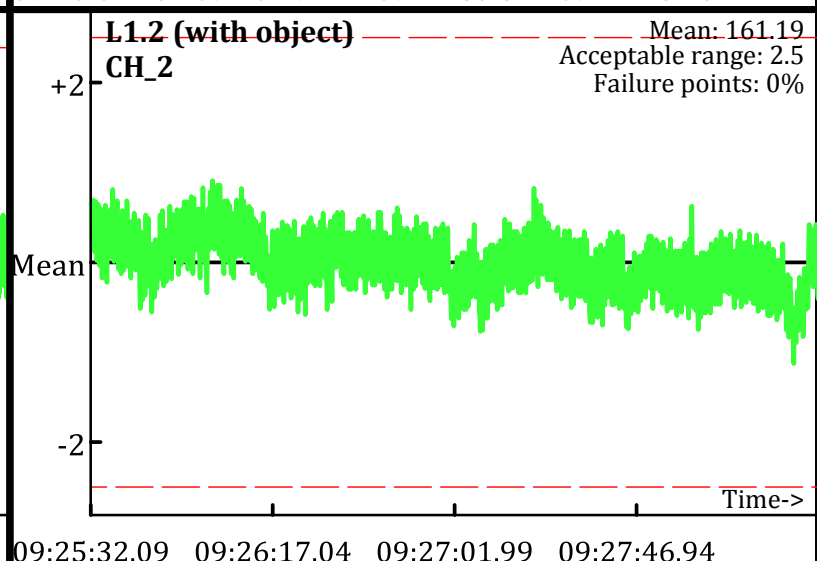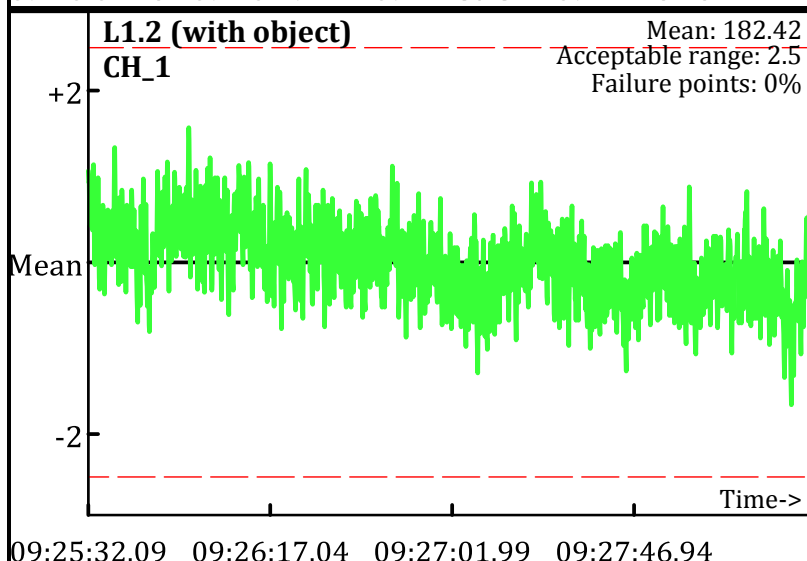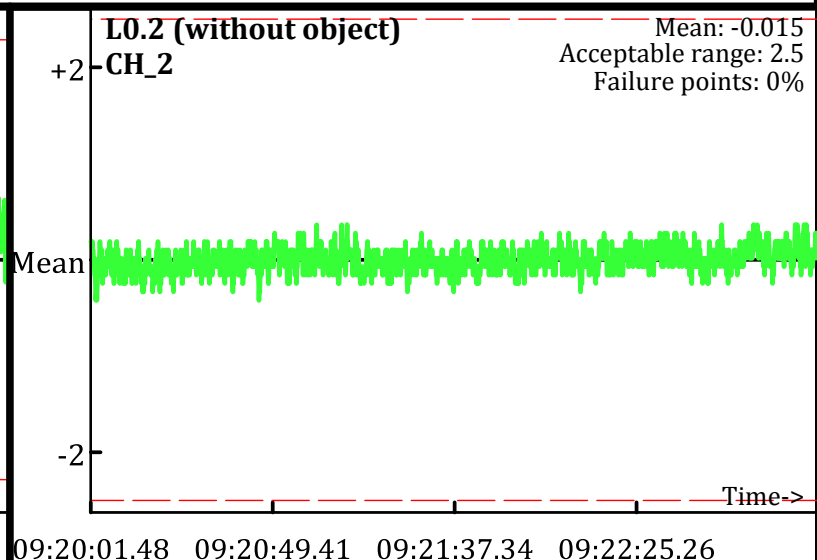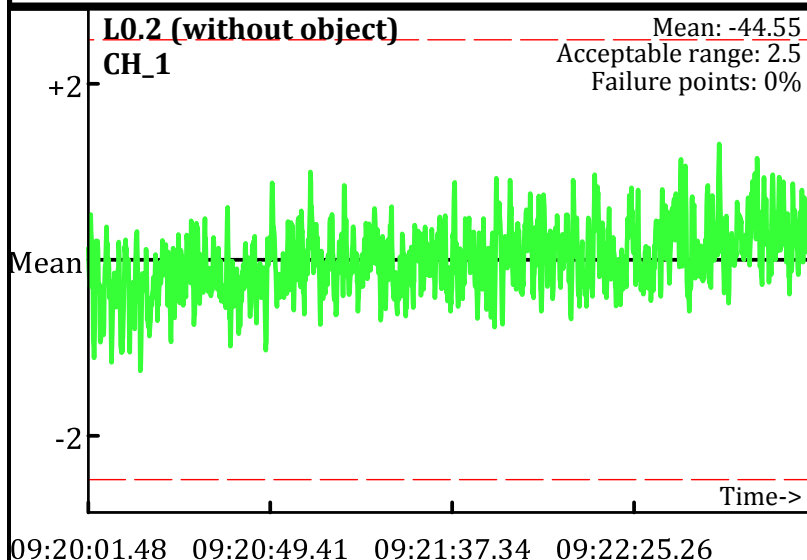Operator: BG & PAZ
Date: 7/13/2009

L0.2 (without object)
CH_1
Mean: -44.55
Acceptable range: 2.5
Failure points: 0%
Time->
09:20:01.48 09:20:49.41 09:21:37.34 09:22:25.26

L0.2 (without object)
CH_2
Mean: -0.015
Acceptable range: 2.5
Failure points: 0%
Time->
09:20:01.48 09:20:49.41 09:21:37.34 09:22:25.26

L1.2 (with object)
CH_1
Mean: 182.42
Acceptable range: 2.5
Failure points: 0%
Time->
09:25:32.09 09:26:17.04 09:27:01.99 09:27:46.94

L1.2 (with object)
CH_2
Mean: 161.19
Acceptable range: 2.5
Failure points: 0%
Time->
09:25:32.09 09:26:17.04 09:27:01.99 09:27:46.94

L2.2 (without object)
CH_1
Mean: -44.25
Acceptable range: 2.5
Failure points: 0%
Time->
09:30:13.89 09:30:26.86 09:30:39.84 09:30:52.81

L2.2 (without object)
CH_2
Mean: -0.18
Acceptable range: 2.5
Failure points: 0%
Time->
09:30:13.89 09:30:26.86 09:30:39.84 09:30:52.81

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
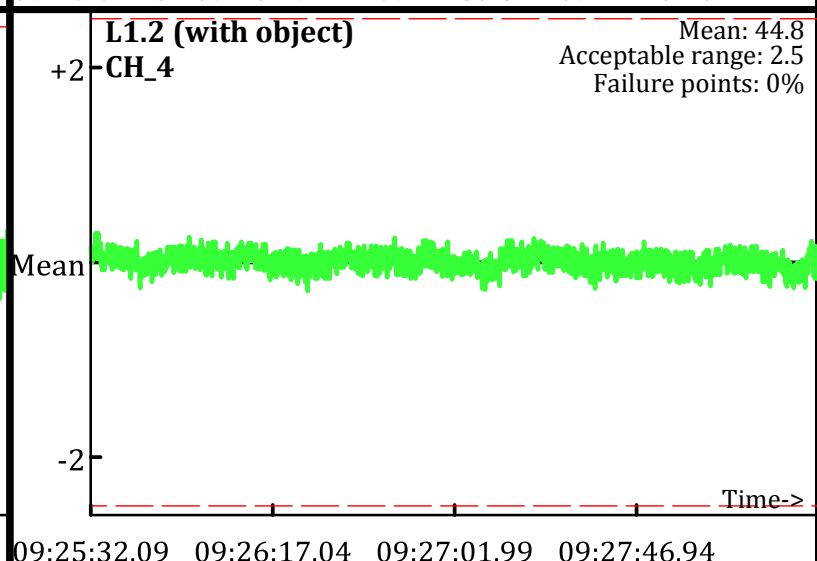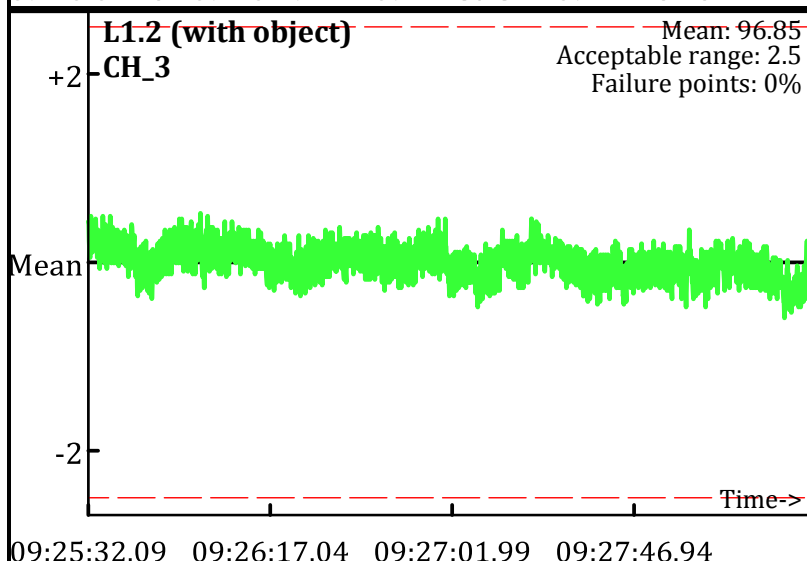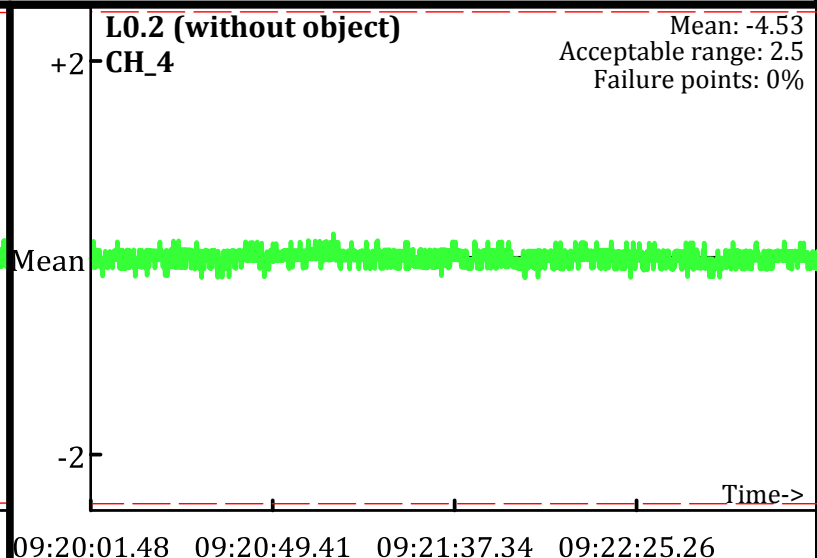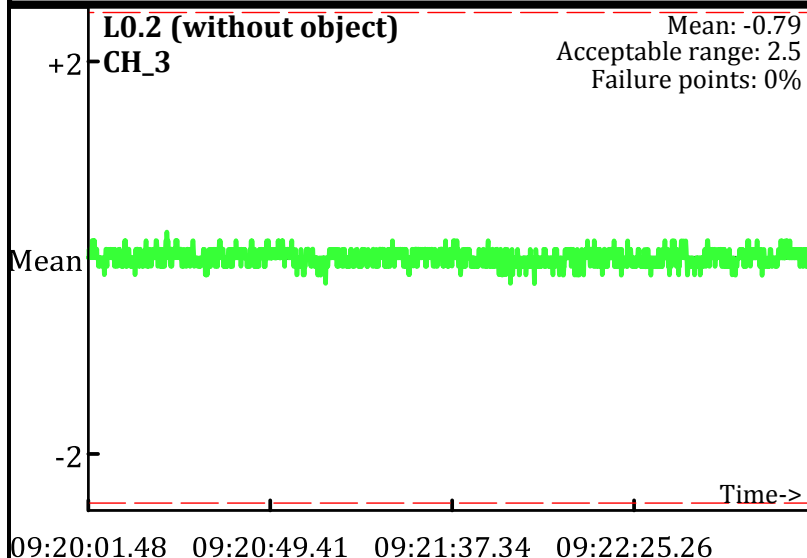Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
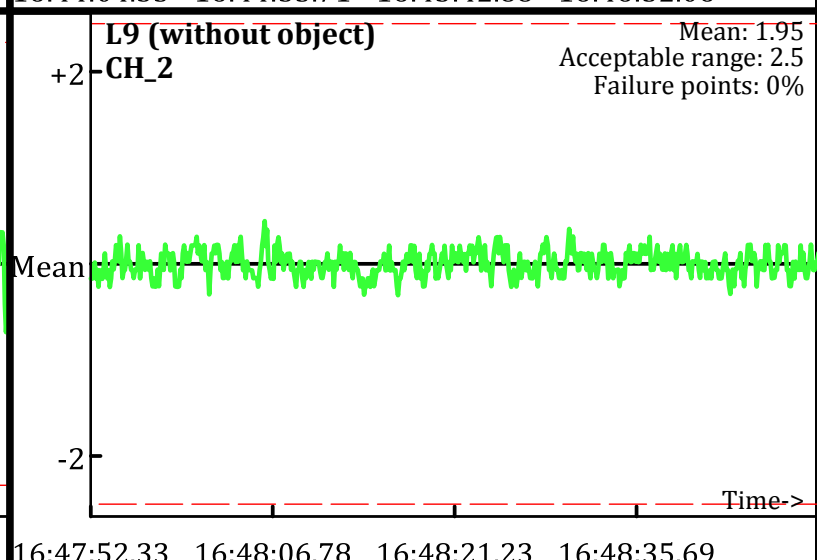Operator: BG & PAZ
Date: 7/13/2009

L0.2 (without object)
CH_3
Mean: -0.79
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:20:01.48   09:20:49.41   09:21:37.34   09:22:25.26

L0.2 (without object)
CH_4
Mean: -4.53
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:20:01.48   09:20:49.41   09:21:37.34   09:22:25.26

L1.2 (with object)
CH_3
Mean: 96.85
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:32.09   09:26:17.04   09:27:01.99   09:27:46.94

L1.2 (with object)
CH_4
Mean: 44.8
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:32.09   09:26:17.04   09:27:01.99   09:27:46.94

L2.2 (without object)
CH_3
Mean: -0.86
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:30:13.89   09:30:26.86   09:30:39.84   09:30:52.81

L2.2 (without object)
CH_4
Mean: -4.58
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:30:13.89   09:30:26.86   09:30:39.84   09:30:52.81

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
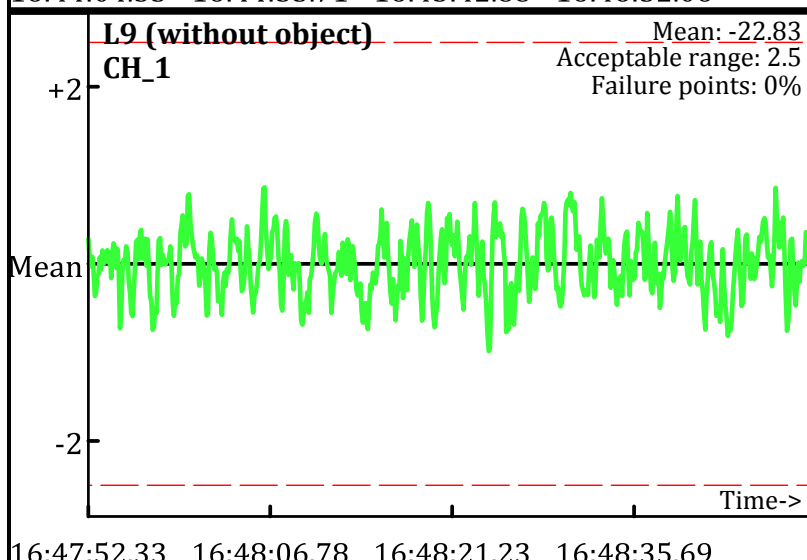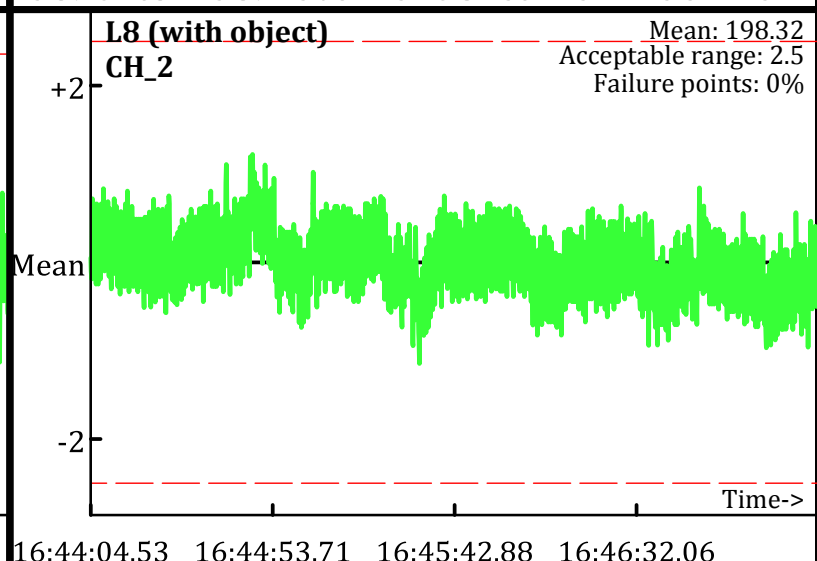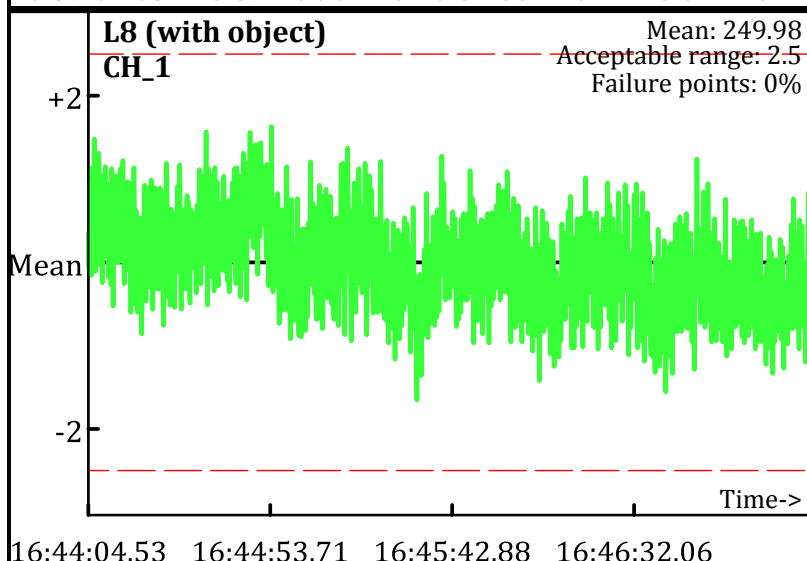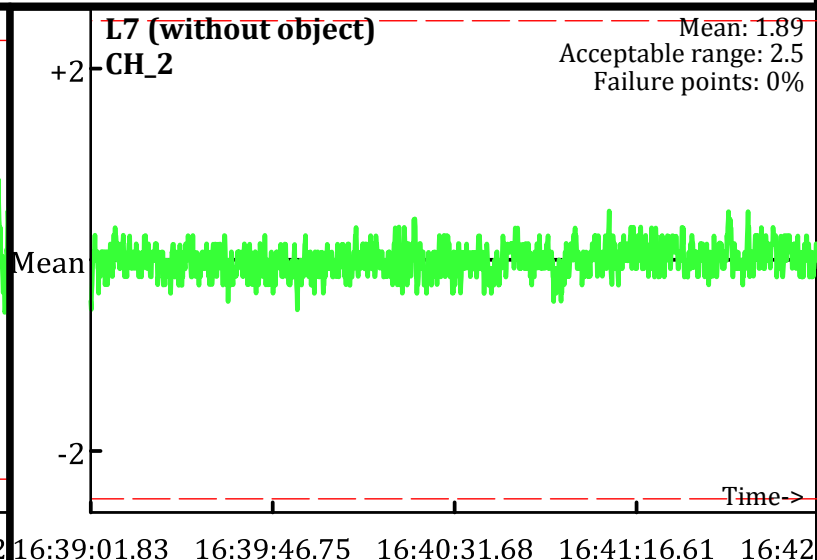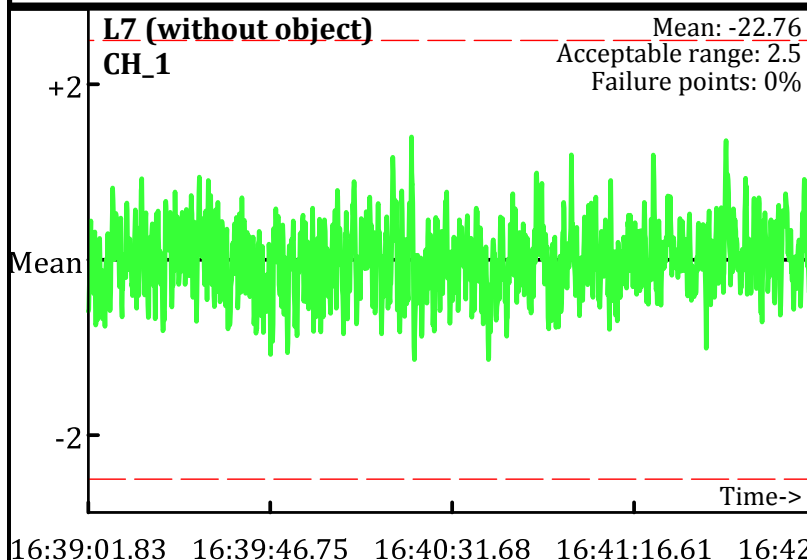– – Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/13/2009
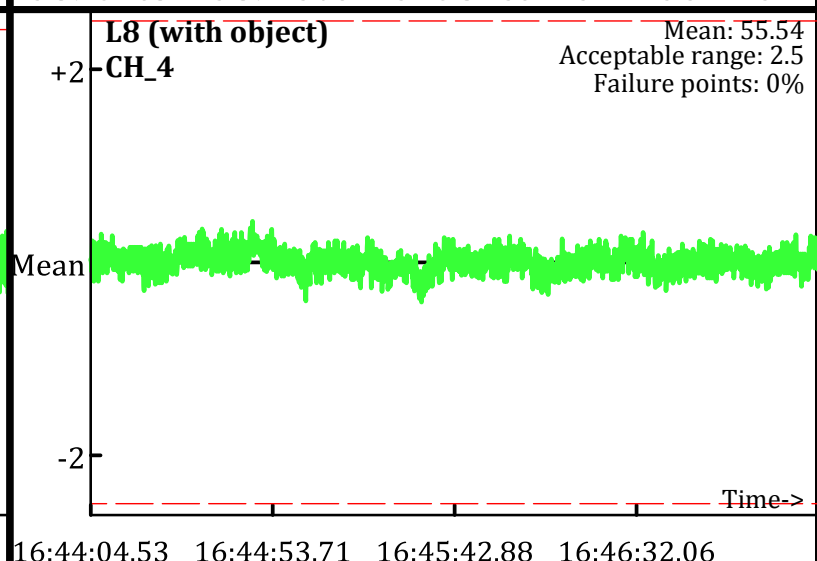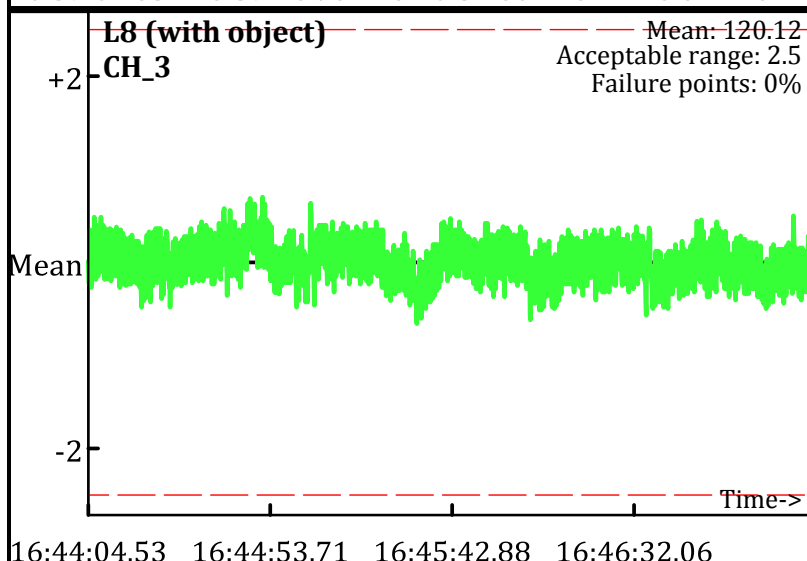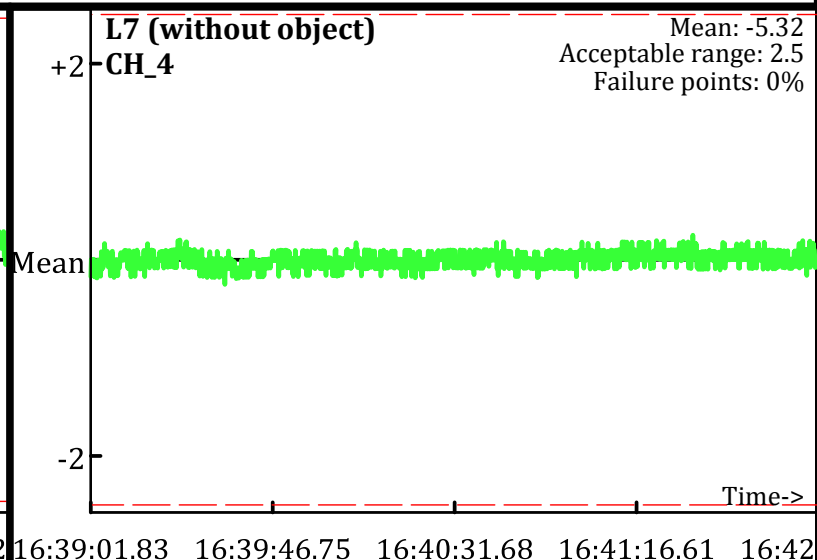

L7 (without object)
CH_1
Mean: -22.76
Acceptable range: 2.5
Failure points: 0%

L7 (without object)
CH_2
Mean: 1.89
Acceptable range: 2.5
Failure points: 0%

16:39:01.83 16:39:46.75 16:40:31.68 16:41:16.61 16:42

L8 (with object)
CH_1
Mean: 249.98
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_2
Mean: 198.32
Acceptable range: 2.5
Failure points: 0%

16:44:04.53 16:44:53.71 16:45:42.88 16:46:32.06

L9 (without object)
CH_1
Mean: -22.83
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
CH_2
Mean: 1.95
Acceptable range: 2.5
Failure points: 0%

16:47:52.33 16:48:06.78 16:48:21.23 16:48:35.69

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
Line Name: L7 L8 L9

Page: 1

Static Calibration Test

L7 (without object)
CH_3
Mean: -0.12
Acceptable range: 2.5
Failure points: 0%

16:39:01.83   16:39:46.75   16:40:31.68   16:41:16.61   16:42

L7 (without object)
CH_4
Mean: -5.32
Acceptable range: 2.5
Failure points: 0%

16:39:01.83   16:39:46.75   16:40:31.68   16:41:16.61   16:42

L8 (with object)
CH_3
Mean: 120.12
Acceptable range: 2.5
Failure points: 0%

16:44:04.53   16:44:53.71   16:45:42.88   16:46:32.06

L8 (with object)
CH_4
Mean: 55.54
Acceptable range: 2.5
Failure points: 0%

16:44:04.53   16:44:53.71   16:45:42.88   16:46:32.06

L9 (without object)
CH_3
Mean: -0.033
Acceptable range: 2.5
Failure points: 0%

16:47:52.33   16:48:06.78   16:48:21.23   16:48:35.69

L9 (without object)
CH_4
Mean: -5.32
Acceptable range: 2.5
Failure points: 0%

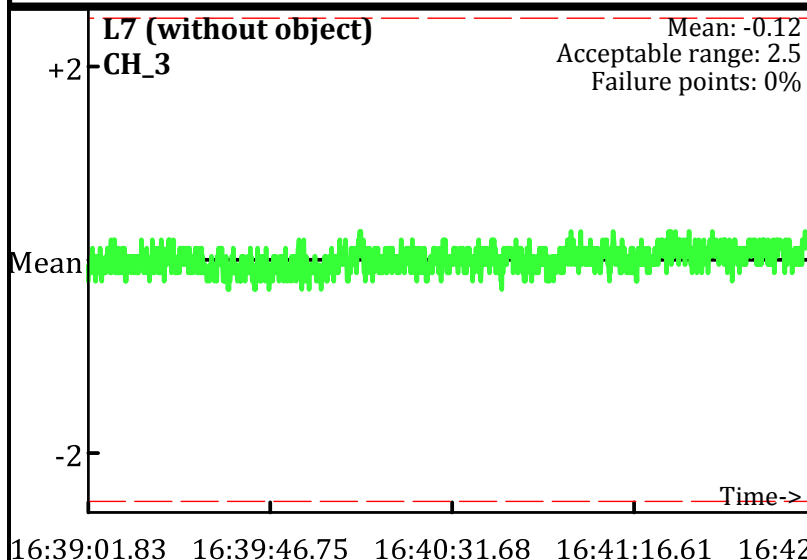16:47:52.33   16:48:06.78   16:48:21.23   16:48:35.69

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
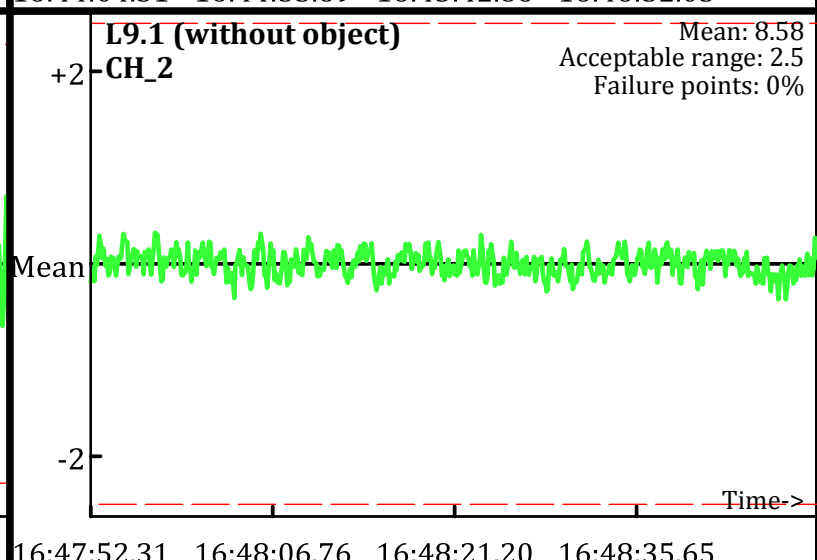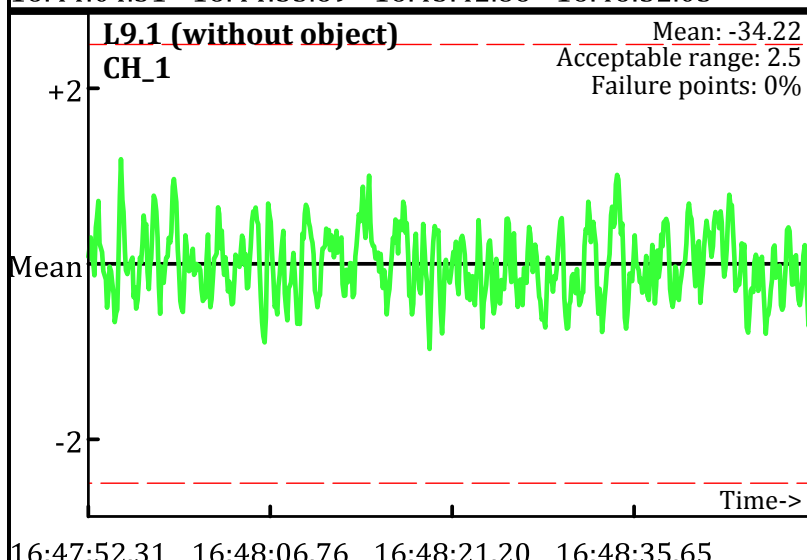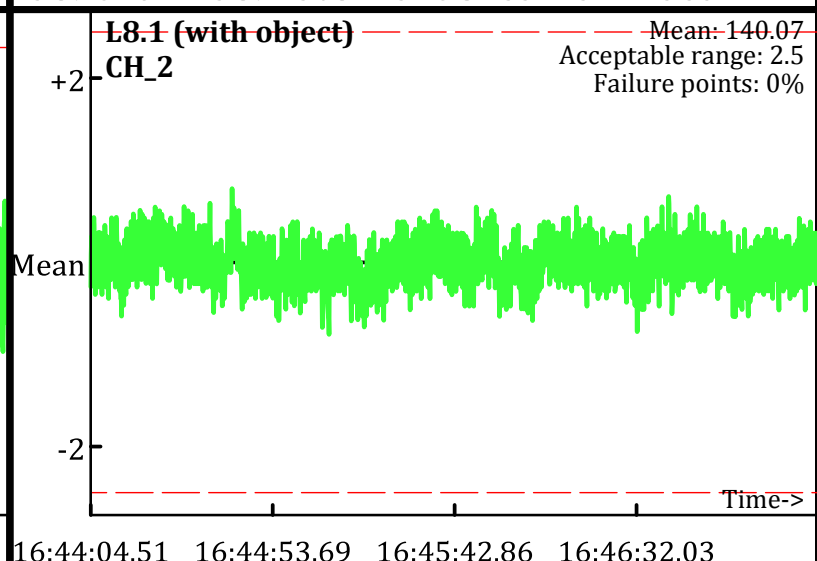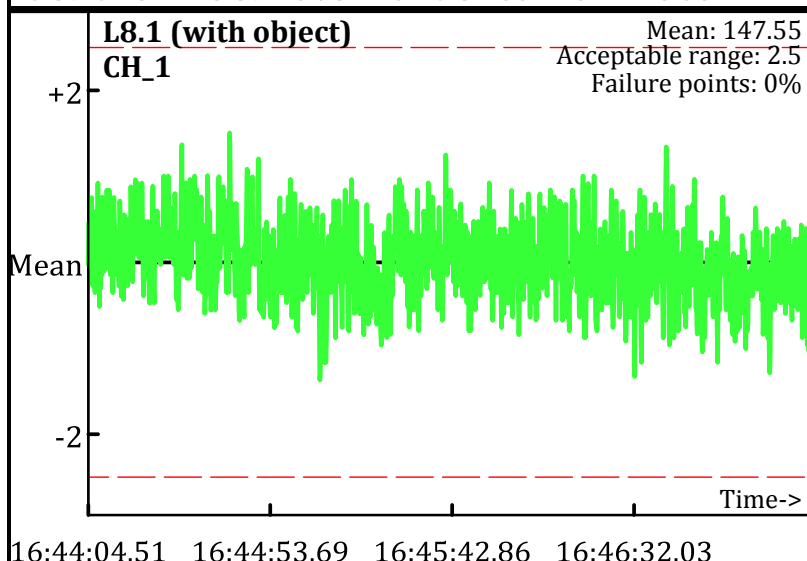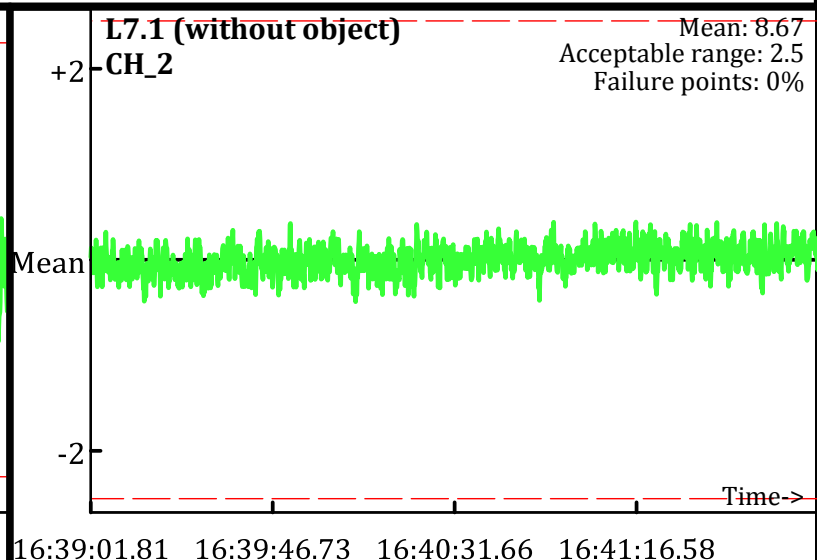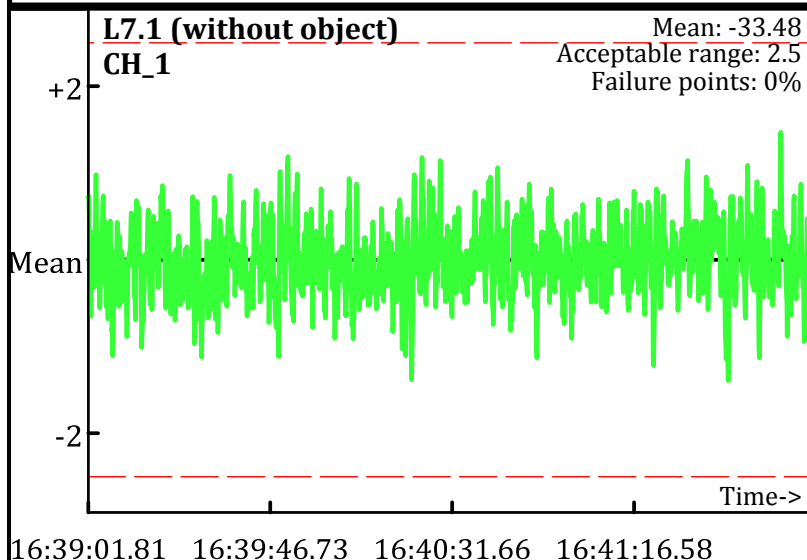– – – Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/13/2009

L7.1 (without object)
CH_1
Mean: -33.48
Acceptable range: 2.5
Failure points: 0%
Time->

16:39:01.81   16:39:46.73   16:40:31.66   16:41:16.58

L7.1 (without object)
CH_2
Mean: 8.67
Acceptable range: 2.5
Failure points: 0%
Time->

16:39:01.81   16:39:46.73   16:40:31.66   16:41:16.58

L8.1 (with object)
CH_1
Mean: 147.55
Acceptable range: 2.5
Failure points: 0%
Time->

16:44:04.51   16:44:53.69   16:45:42.86   16:46:32.03

L8.1 (with object)
CH_2
Mean: 140.07
Acceptable range: 2.5
Failure points: 0%
Time->

16:44:04.51   16:44:53.69   16:45:42.86   16:46:32.03

L9.1 (without object)
CH_1
Mean: -34.22
Acceptable range: 2.5
Failure points: 0%
Time->

16:47:52.31   16:48:06.76   16:48:21.20   16:48:35.65

L9.1 (without object)
CH_2
Mean: 8.58
Acceptable range: 2.5
Failure points: 0%
Time->

16:47:52.31   16:48:06.76   16:48:21.20   16:48:35.65

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
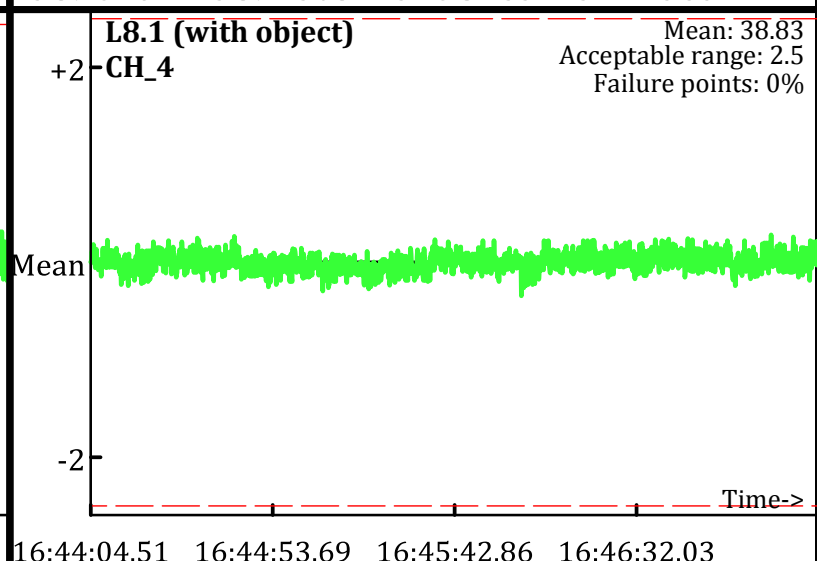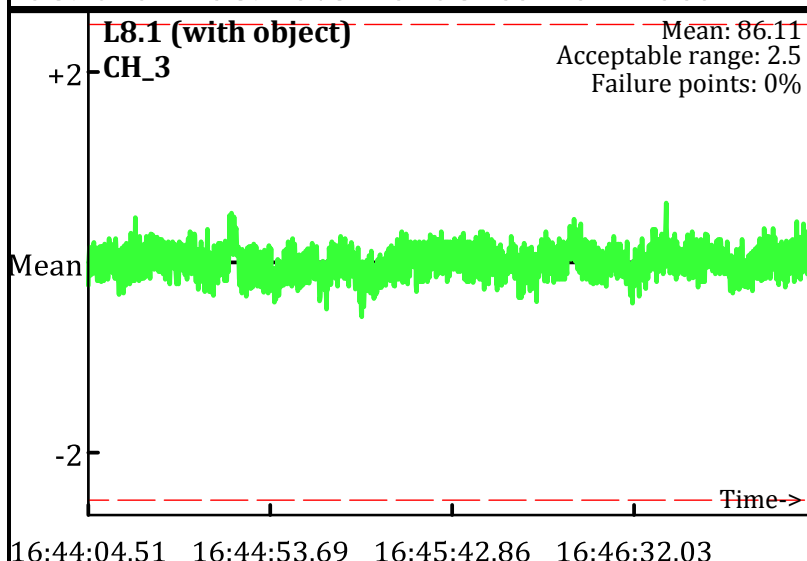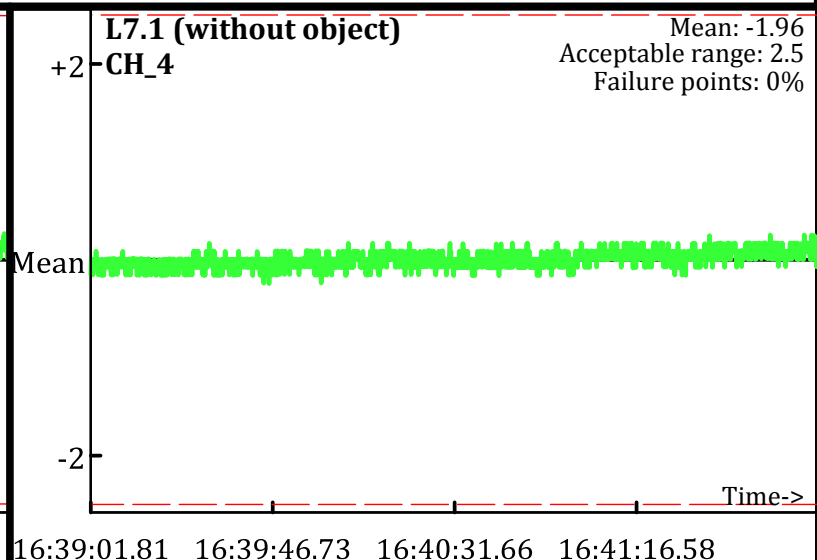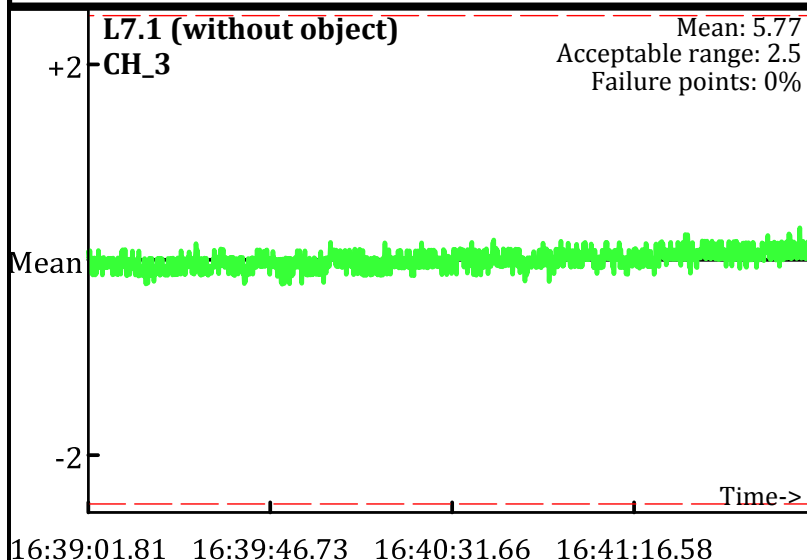Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
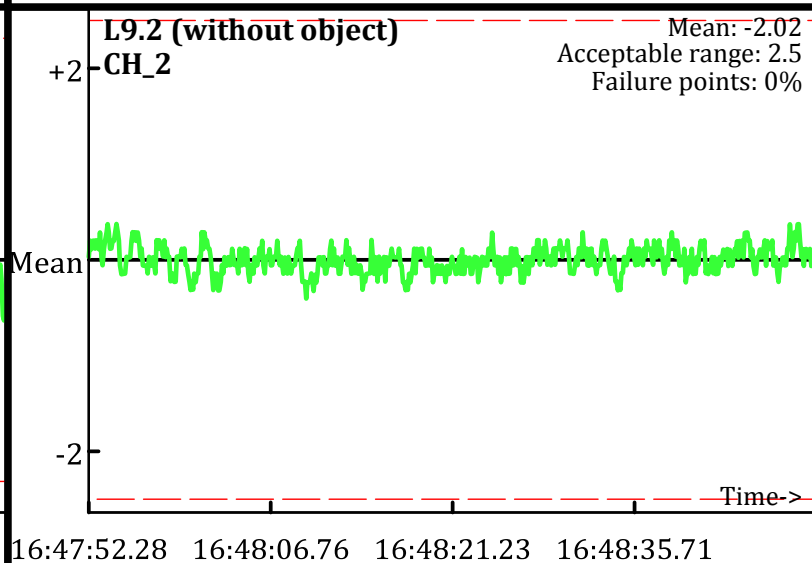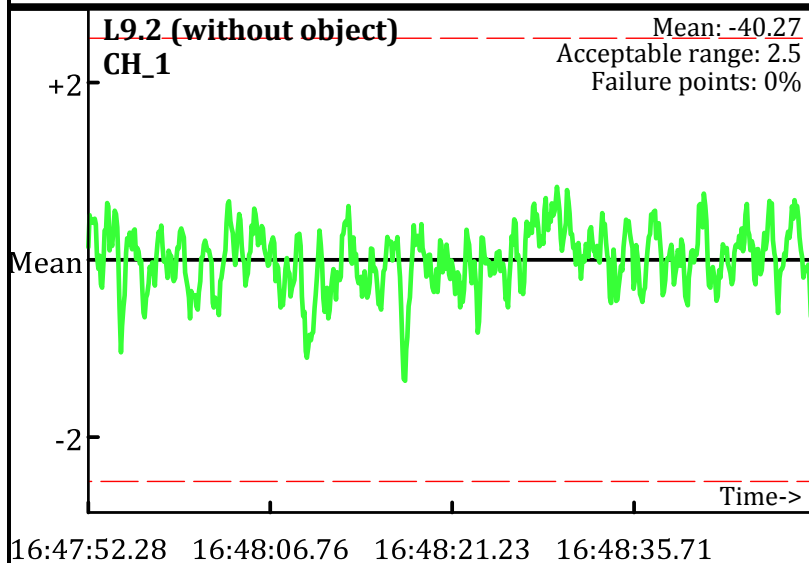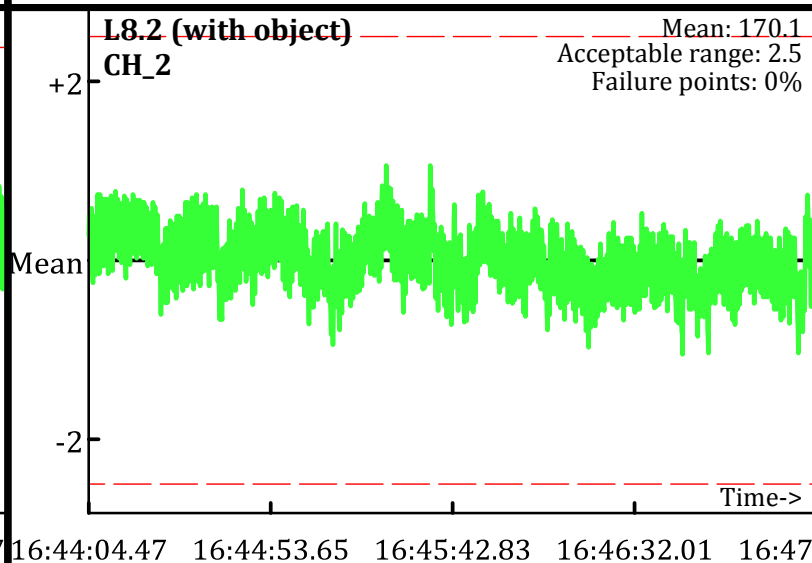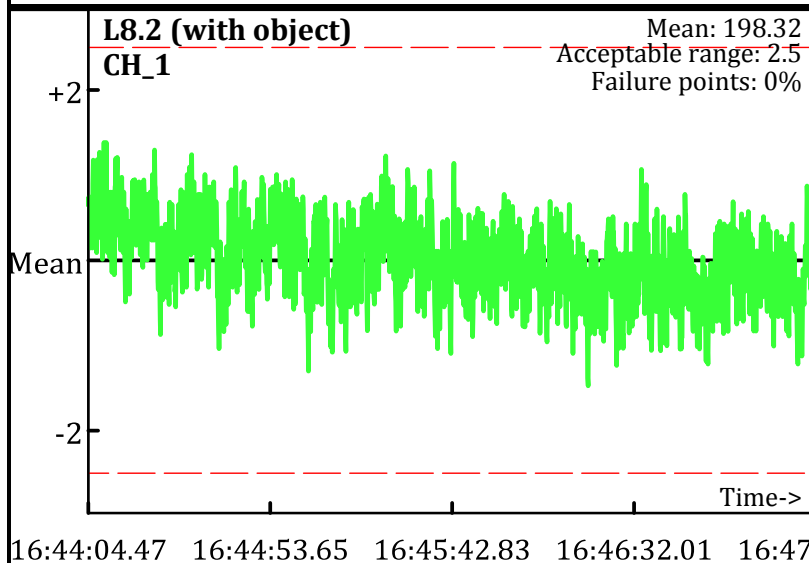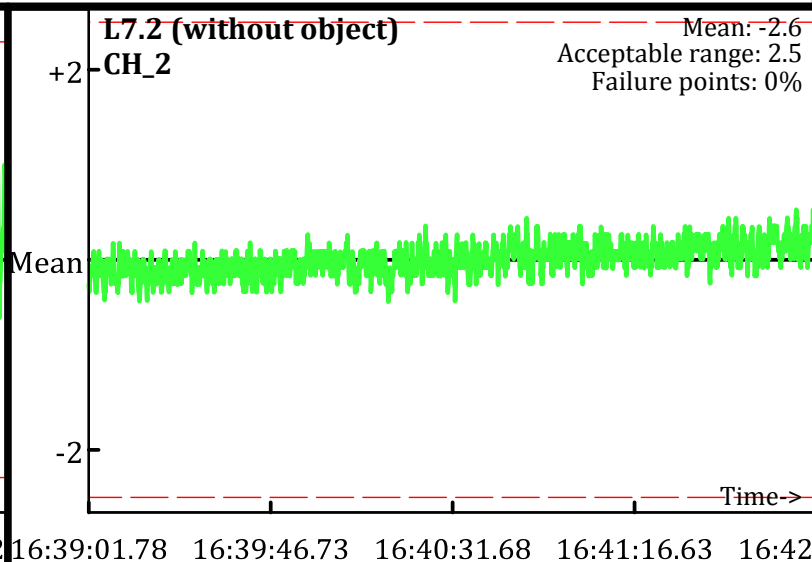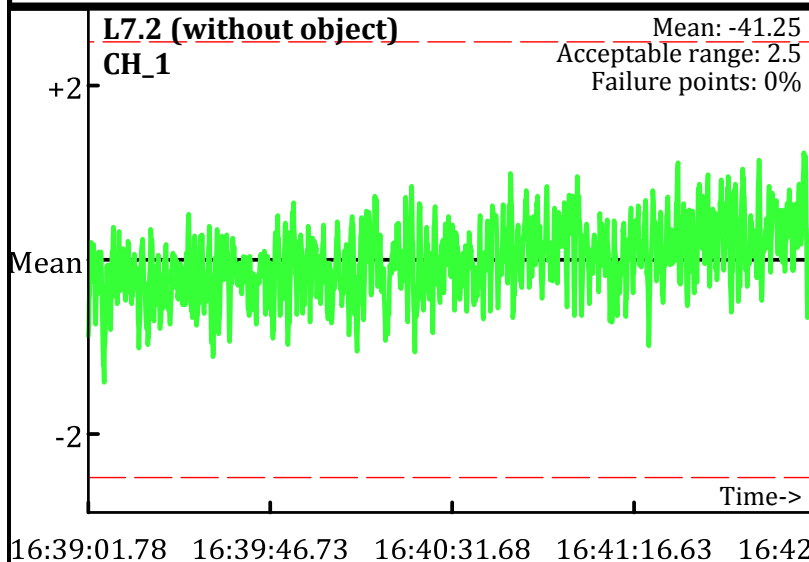Operator: BG & PAZ
Date: 7/13/2009

L7.1 (without object) CH_3 — Mean: 5.77, Acceptable range: 2.5, Failure points: 0%
+2 / Mean / -2
Time->
16:39:01.81   16:39:46.73   16:40:31.66   16:41:16.58

L7.1 (without object) CH_4 — Mean: -1.96, Acceptable range: 2.5, Failure points: 0%
+2 / Mean / -2
Time->
16:39:01.81   16:39:46.73   16:40:31.66   16:41:16.58

L8.1 (with object) CH_3 — Mean: 86.11, Acceptable range: 2.5, Failure points: 0%
+2 / Mean / -2
Time->
16:44:04.51   16:44:53.69   16:45:42.86   16:46:32.03

L8.1 (with object) CH_4 — Mean: 38.83, Acceptable range: 2.5, Failure points: 0%
+2 / Mean / -2
Time->
16:44:04.51   16:44:53.69   16:45:42.86   16:46:32.03

L9.1 (without object) CH_3 — Mean: 5.8, Acceptable range: 2.5, Failure points: 0%
+2 / Mean / -2
Time->
16:47:52.31   16:48:06.76   16:48:21.20   16:48:35.65

L9.1 (without object) CH_4 — Mean: -2.02, Acceptable range: 2.5, Failure points: 0%
+2 / Mean / -2
Time->
16:47:52.31   16:48:06.76   16:48:21.20   16:48:35.65

Static Calibration Test

L7.2 (without object) CH_1 — Mean: -41.25, Acceptable range: 2.5, Failure points: 0%
L7.2 (without object) CH_2 — Mean: -2.6, Acceptable range: 2.5, Failure points: 0%
L8.2 (with object) CH_1 — Mean: 198.32, Acceptable range: 2.5, Failure points: 0%
L8.2 (with object) CH_2 — Mean: 170.1, Acceptable range: 2.5, Failure points: 0%
L9.2 (without object) CH_1 — Mean: -40.27, Acceptable range: 2.5, Failure points: 0%
L9.2 (without object) CH_2 — Mean: -2.02, Acceptable range: 2.5, Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/13/2009
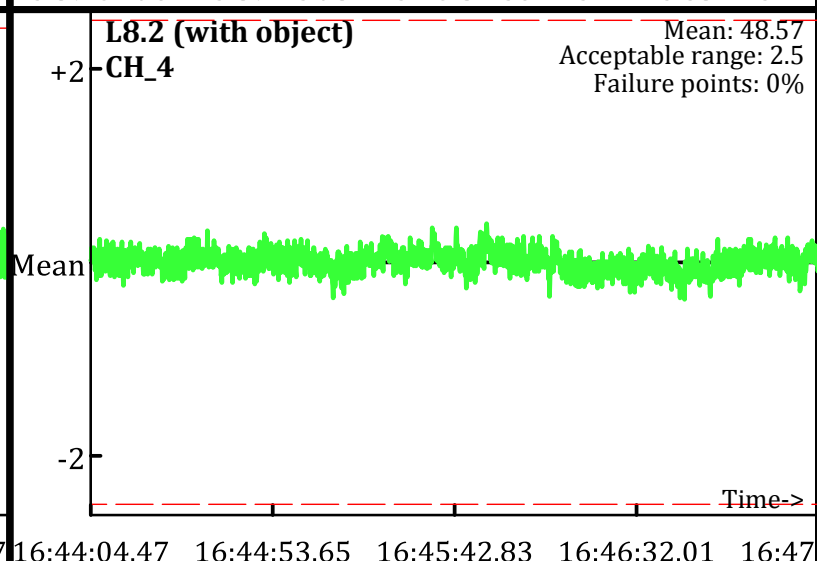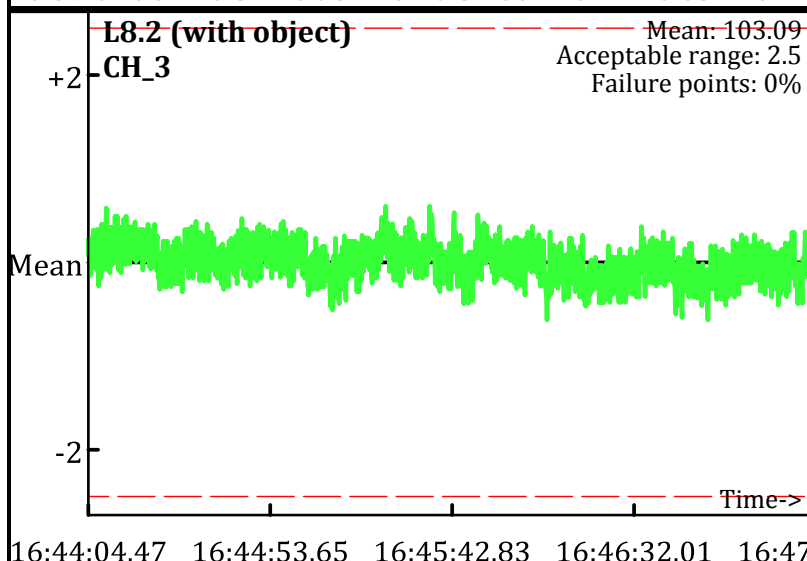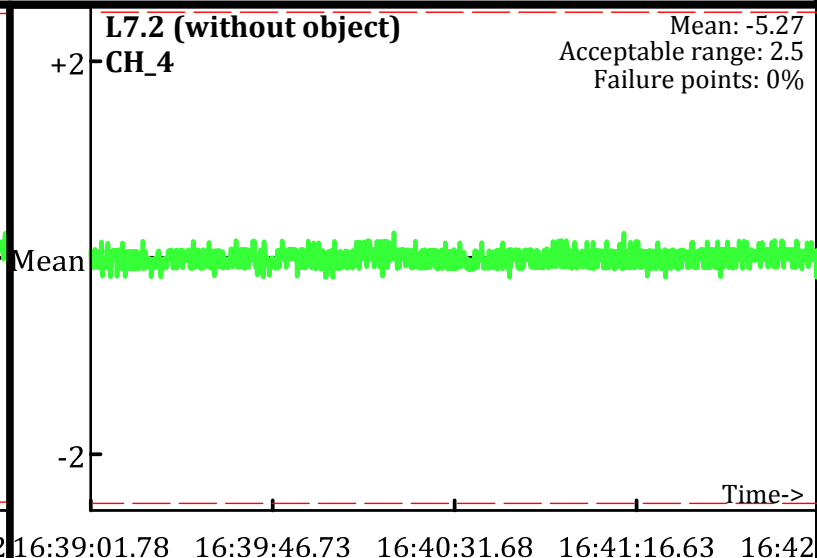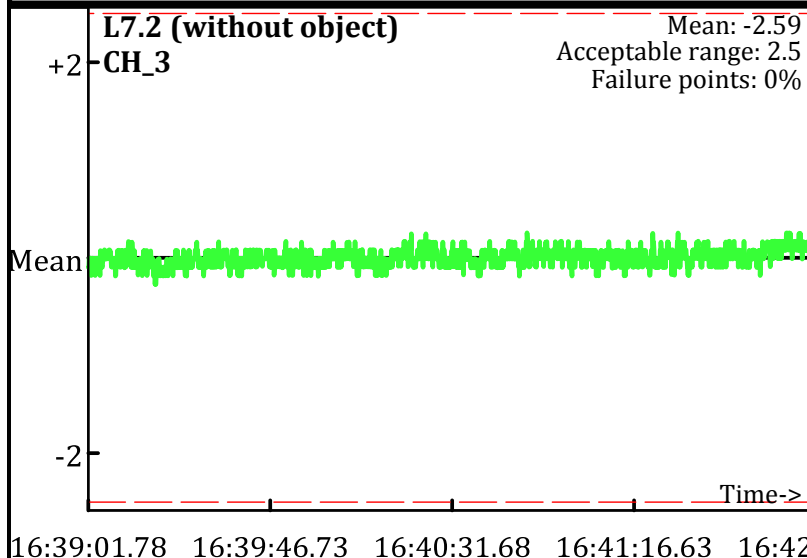
L7.2 (without object)
CH_3
Mean: -2.59
Acceptable range: 2.5
Failure points: 0%

16:39:01.78 16:39:46.73 16:40:31.68 16:41:16.63 16:42

L7.2 (without object)
CH_4
Mean: -5.27
Acceptable range: 2.5
Failure points: 0%

16:39:01.78 16:39:46.73 16:40:31.68 16:41:16.63 16:42

L8.2 (with object)
CH_3
Mean: 103.09
Acceptable range: 2.5
Failure points: 0%

16:44:04.47 16:44:53.65 16:45:42.83 16:46:32.01 16:47

L8.2 (with object)
CH_4
Mean: 48.57
Acceptable range: 2.5
Failure points: 0%

16:44:04.47 16:44:53.65 16:45:42.83 16:46:32.01 16:47

L9.2 (without object)
CH_3
Mean: -2.38
Acceptable range: 2.5
Failure points: 0%

16:47:52.28 16:48:06.76 16:48:21.23 16:48:35.71

L9.2 (without object)
CH_4
Mean: -5.21
Acceptable range: 2.5
Failure points: 0%

16:47:52.28 16:48:06.76 16:48:21.23 16:48:35.71

Database: C:_QCReports_Ord_Data\071309\QC\071309_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
--- Acceptable limits

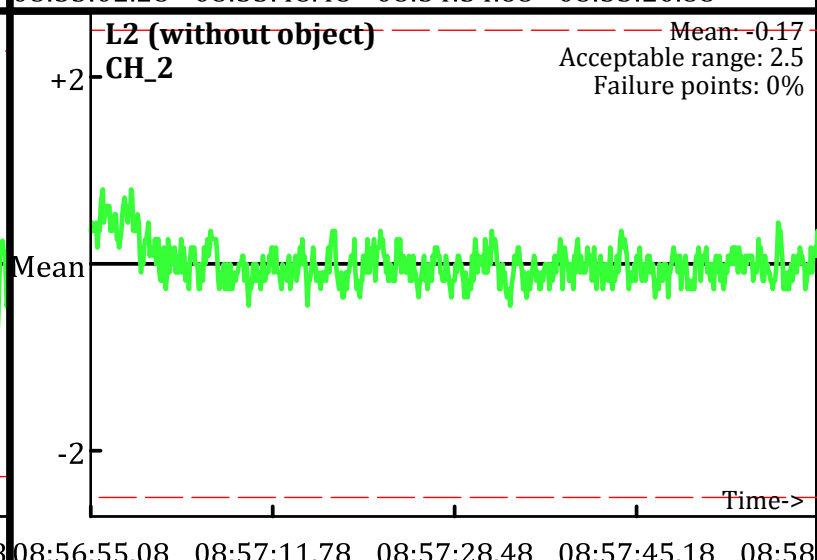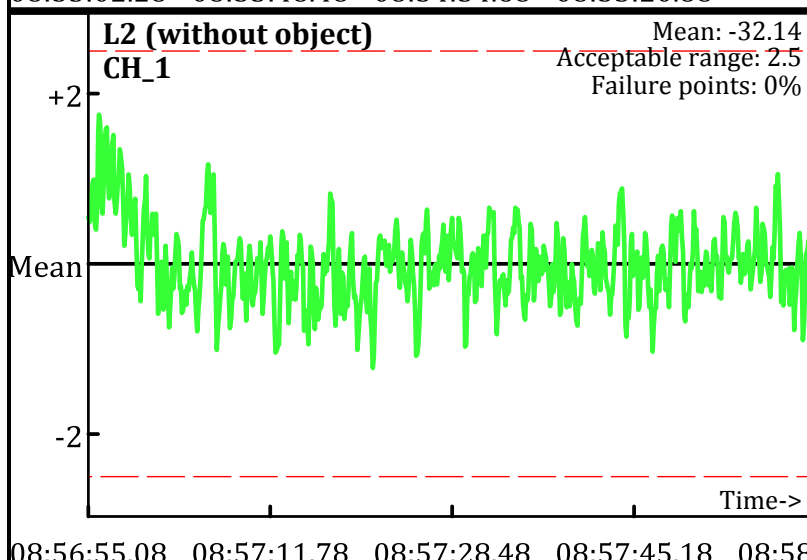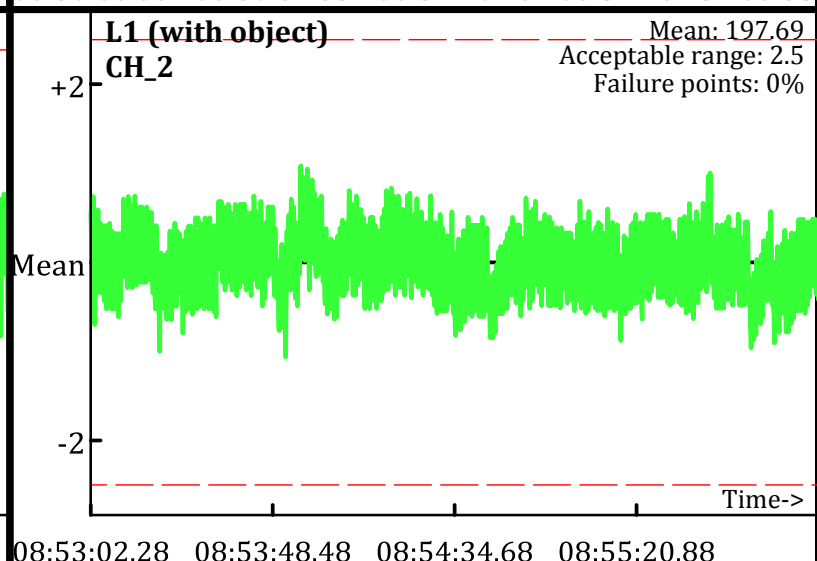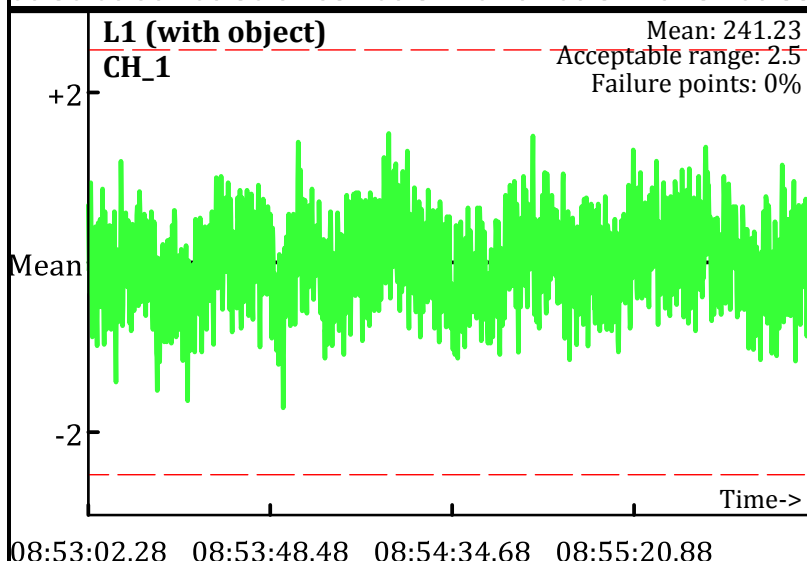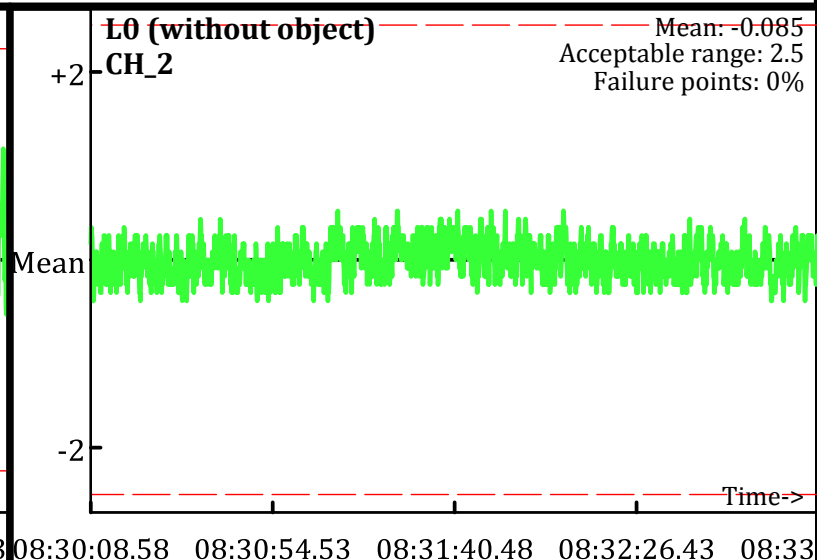AM test
Operator: BG & PAZ
Date: 7/14/2009

L0 (without object)
CH_1
Mean: -34.91
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_2
Mean: -0.085
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_1
Mean: 241.23
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_2
Mean: 197.69
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_1
Mean: -32.14
Acceptable range: 2.5
Failure points: 0%

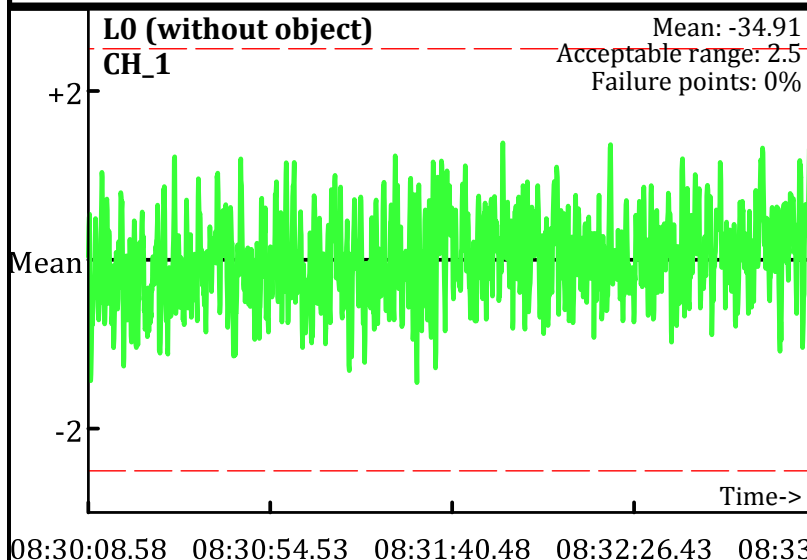**L2 (without object)**
CH_2
Mean: -0.17
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/14/2009
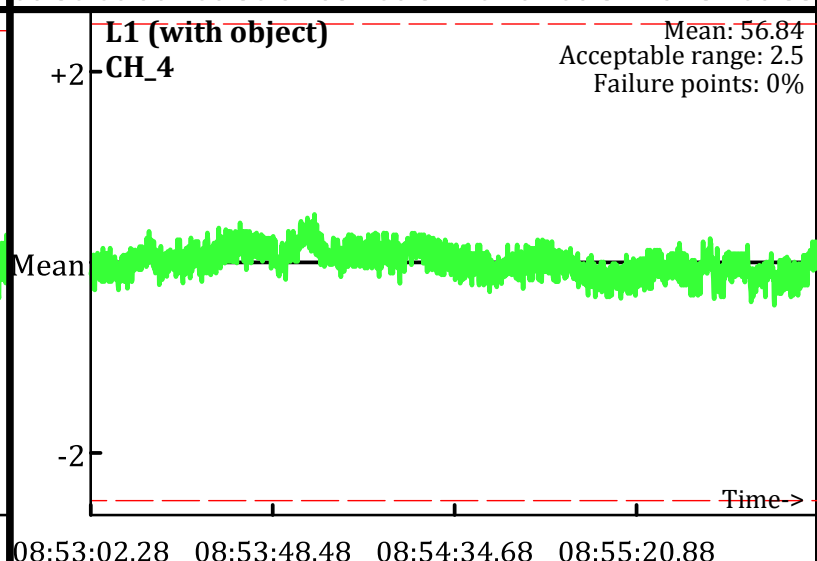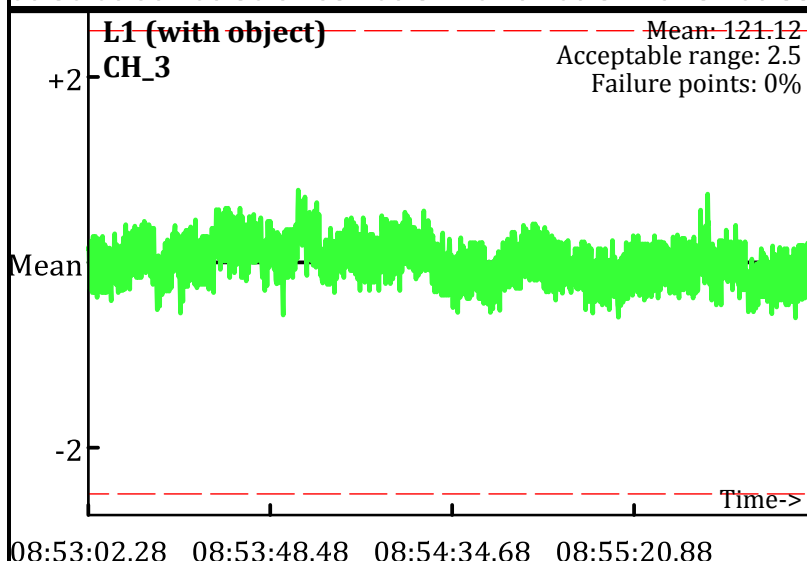
L0 (without object) CH_3
Mean: -0.9
Acceptable range: 2.5
Failure points: 0%

Time->

08:30:08.58 08:30:54.53 08:31:40.48 08:32:26.43 08:33

L0 (without object) CH_4
Mean: -5.67
Acceptable range: 2.5
Failure points: 0%

Time->

08:30:08.58 08:30:54.53 08:31:40.48 08:32:26.43 08:33

L1 (with object) CH_3
Mean: 121.12
Acceptable range: 2.5
Failure points: 0%

Time->

08:53:02.28 08:53:48.48 08:54:34.68 08:55:20.88

L1 (with object) CH_4
Mean: 56.84
Acceptable range: 2.5
Failure points: 0%

Time->

08:53:02.28 08:53:48.48 08:54:34.68 08:55:20.88

L2 (without object) CH_3
Mean: -0.97
Acceptable range: 2.5
Failure points: 0%

Time->

08:56:55.08 08:57:11.78 08:57:28.48 08:57:45.18 08:58

L2 (without object) CH_4
Mean: -5.78
Acceptable range: 2.5
Failure points: 0%

Time->

08:56:55.08 08:57:11.78 08:57:28.48 08:57:45.18 08:58

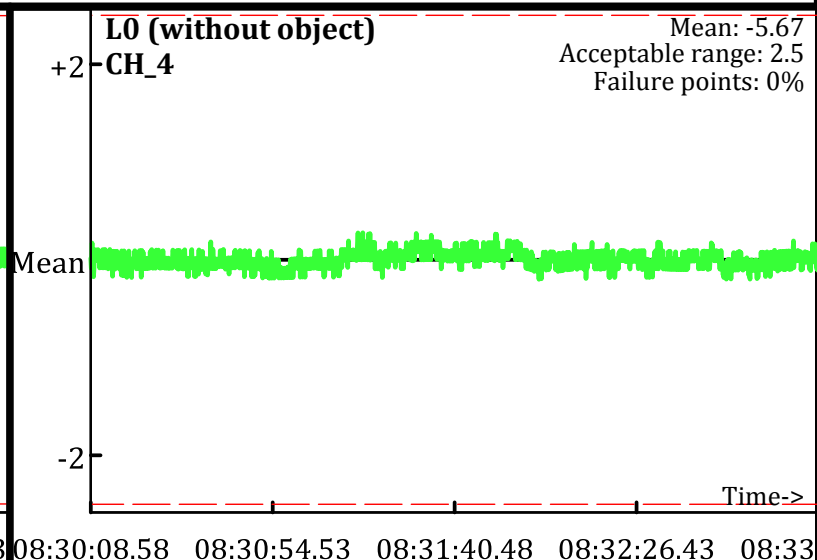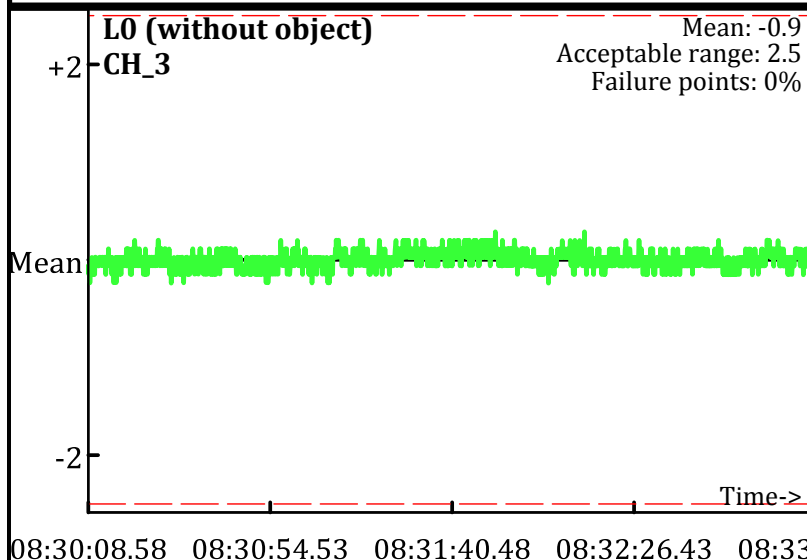Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
Line Name: L0 L1 L2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
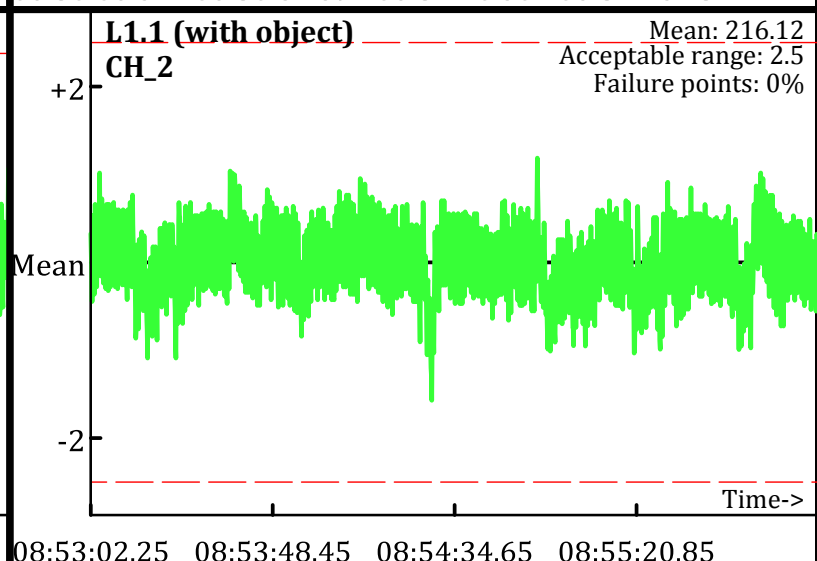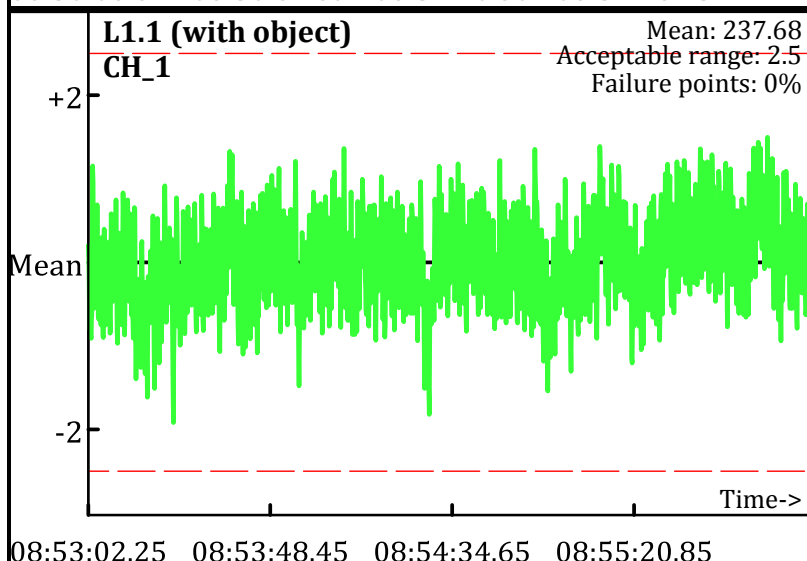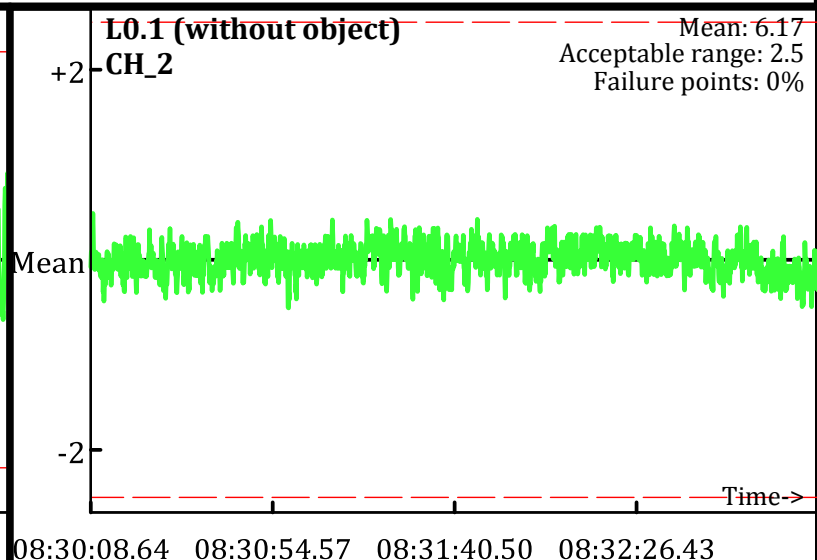Grid/Location: QC Area

● Outside range
--- Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/14/2009

L0.1 (without object) CH_1
Mean: -56.36
Acceptable range: 2.5
Failure points: 0%
08:30:08.64 08:30:54.57 08:31:40.50 08:32:26.43

L0.1 (without object) CH_2
Mean: 6.17
Acceptable range: 2.5
Failure points: 0%
08:30:08.64 08:30:54.57 08:31:40.50 08:32:26.43

L1.1 (with object) CH_1
Mean: 237.68
Acceptable range: 2.5
Failure points: 0%
08:53:02.25 08:53:48.45 08:54:34.65 08:55:20.85

L1.1 (with object) CH_2
Mean: 216.12
Acceptable range: 2.5
Failure points: 0%
08:53:02.25 08:53:48.45 08:54:34.65 08:55:20.85

L2.1 (without object) CH_1
Mean: -49.25
Acceptable range: 2.5
Failure points: 0%
08:56:55.05 08:57:11.77 08:57:28.50 08:57:45.23 08:58

L2.1 (without object) CH_2
Mean: 6.89
Acceptable range: 2.5
Failure points: 0%
08:56:55.05 08:57:11.77 08:57:28.50 08:57:45.23 08:58

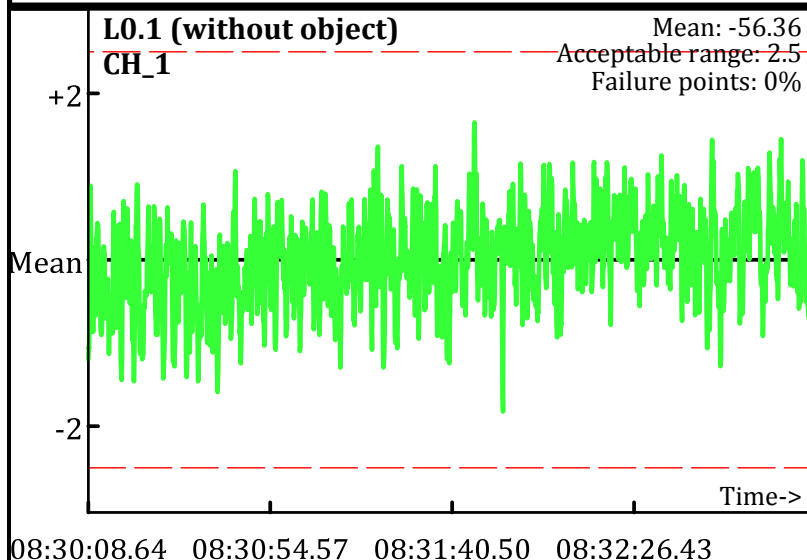Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
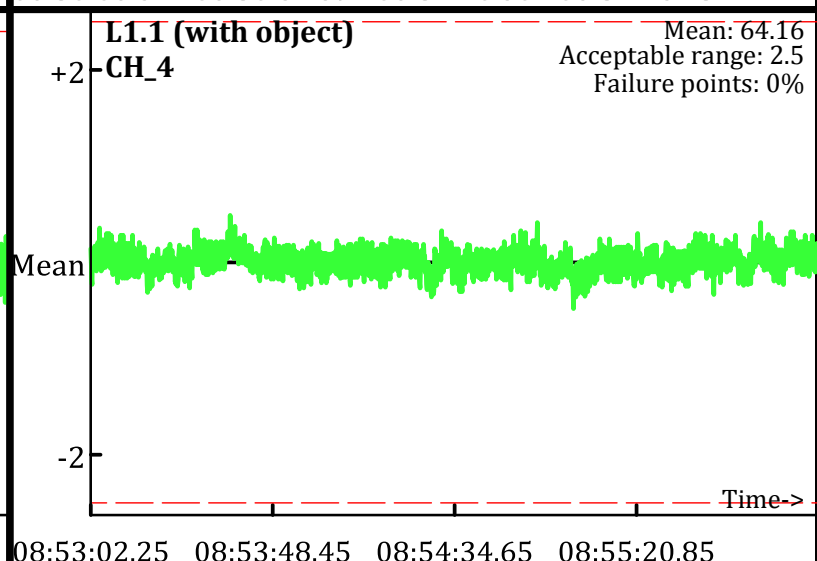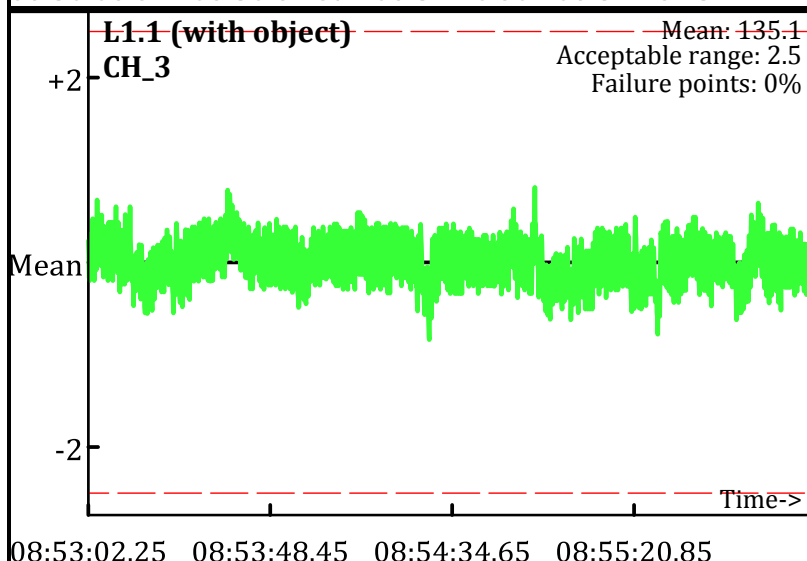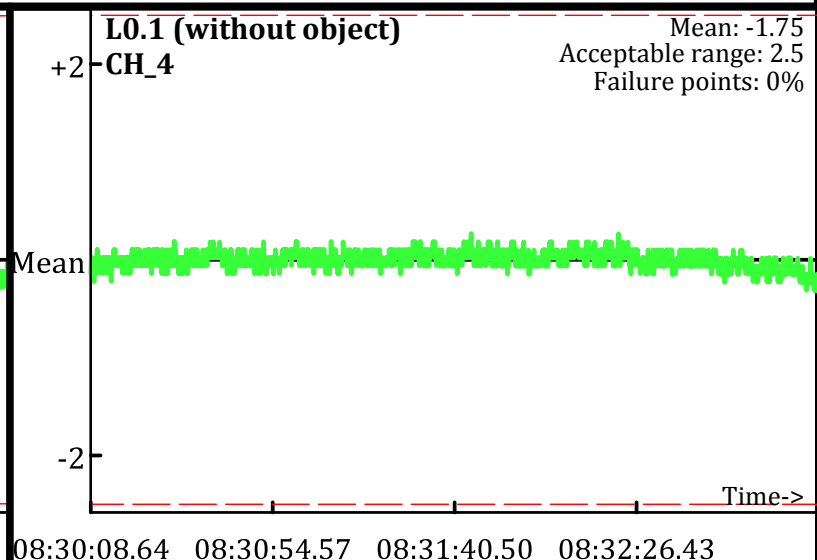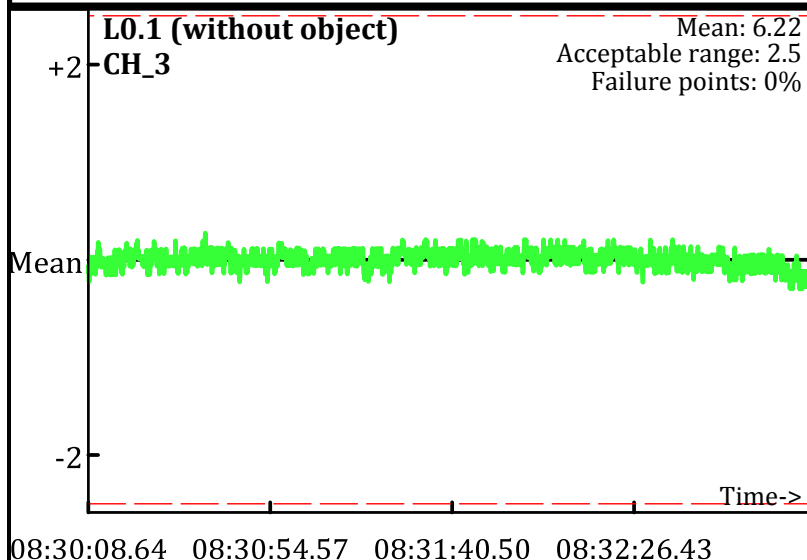Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/14/2009

L0.1 (without object)
CH_3
Mean: 6.22
Acceptable range: 2.5
Failure points: 0%

08:30:08.64   08:30:54.57   08:31:40.50   08:32:26.43

L0.1 (without object)
CH_4
Mean: -1.75
Acceptable range: 2.5
Failure points: 0%

08:30:08.64   08:30:54.57   08:31:40.50   08:32:26.43

L1.1 (with object)
CH_3
Mean: 135.1
Acceptable range: 2.5
Failure points: 0%

08:53:02.25   08:53:48.45   08:54:34.65   08:55:20.85

L1.1 (with object)
CH_4
Mean: 64.16
Acceptable range: 2.5
Failure points: 0%

08:53:02.25   08:53:48.45   08:54:34.65   08:55:20.85

L2.1 (without object)
CH_3
Mean: 5.96
Acceptable range: 2.5
Failure points: 0%

08:56:55.05   08:57:11.77   08:57:28.50   08:57:45.23   08:58

L2.1 (without object)
CH_4
Mean: -2.12
Acceptable range: 2.5
Failure points: 0%

08:56:55.05   08:57:11.77   08:57:28.50   08:57:45.23   08:58

Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits
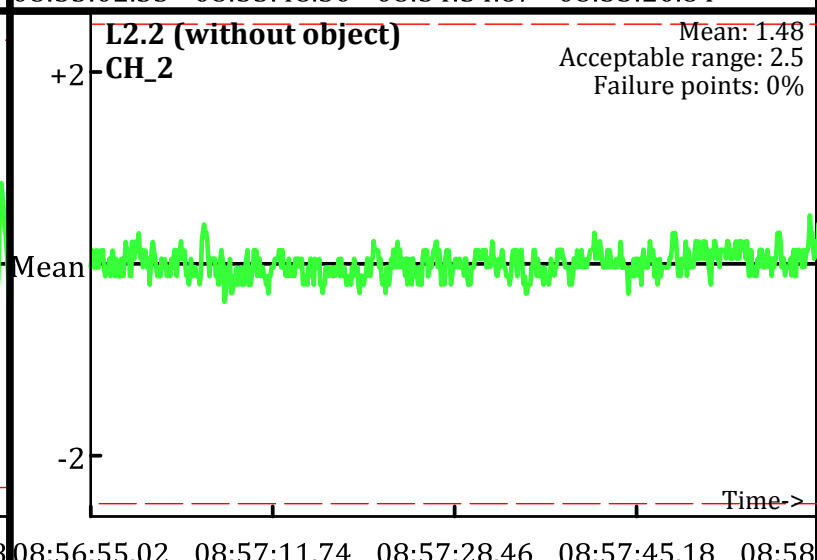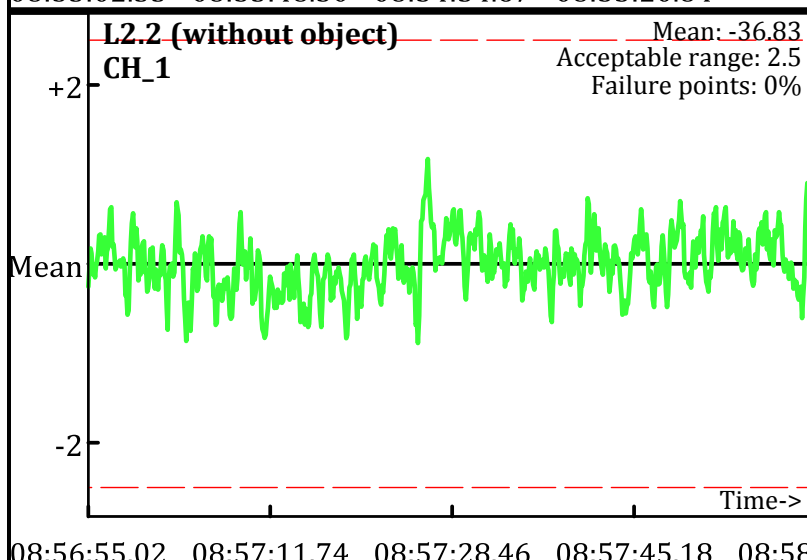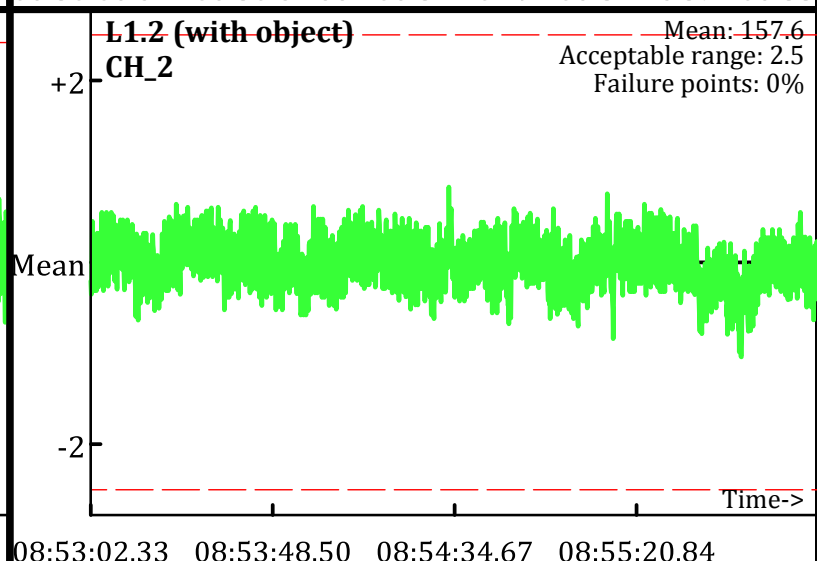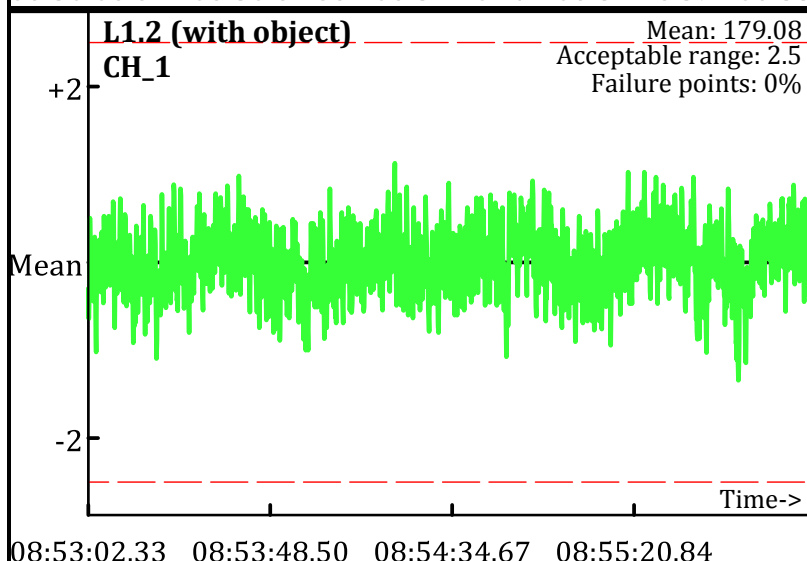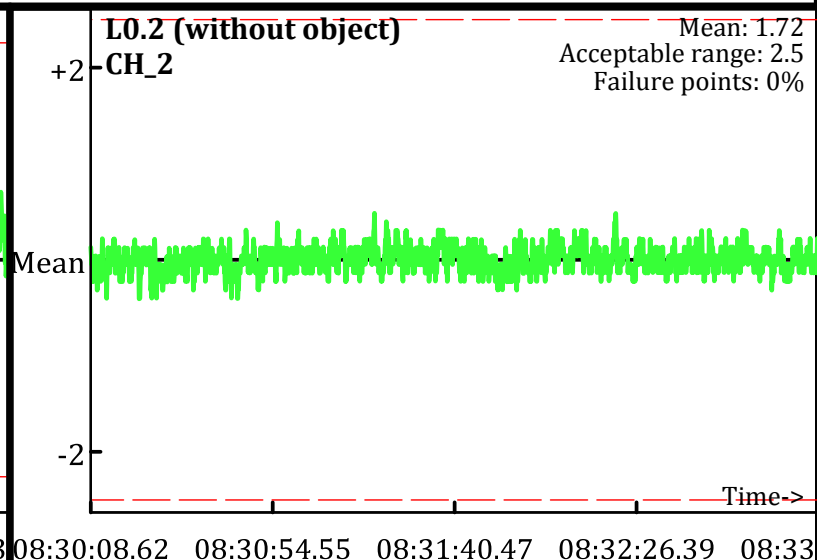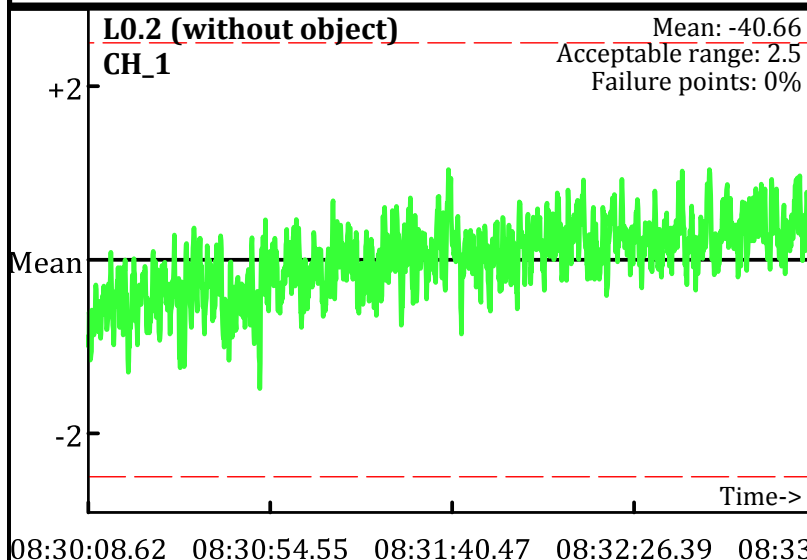
AM test
Operator: BG & PAZ
Date: 7/14/2009

L0.2 (without object)
CH_1
Mean: -40.66
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_2
Mean: 1.72
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_1
Mean: 179.08
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_2
Mean: 157.6
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_1
Mean: -36.83
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_2
Mean: 1.48
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
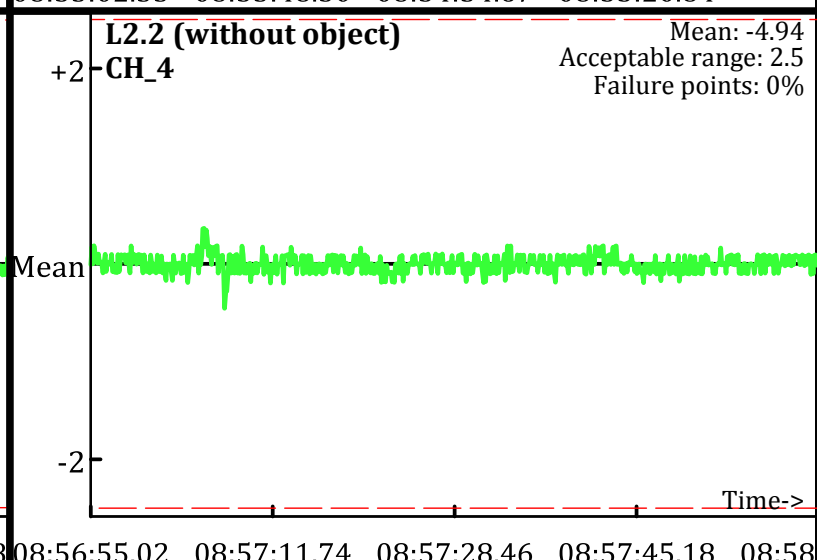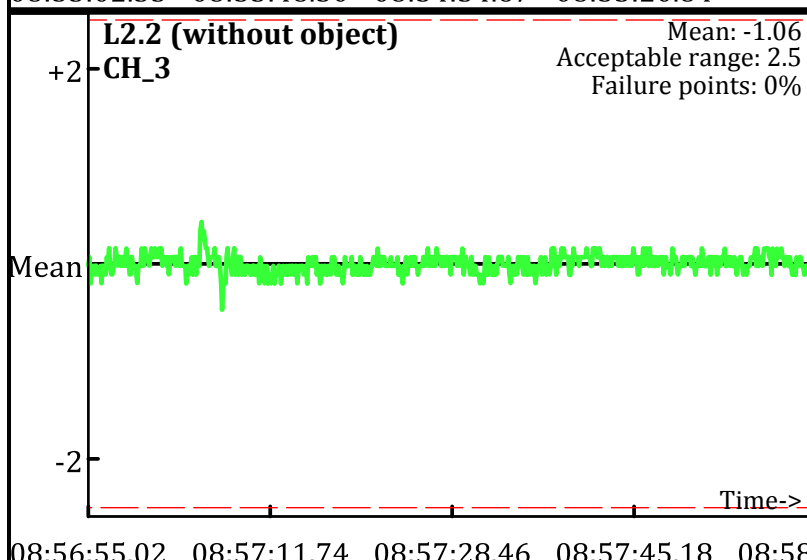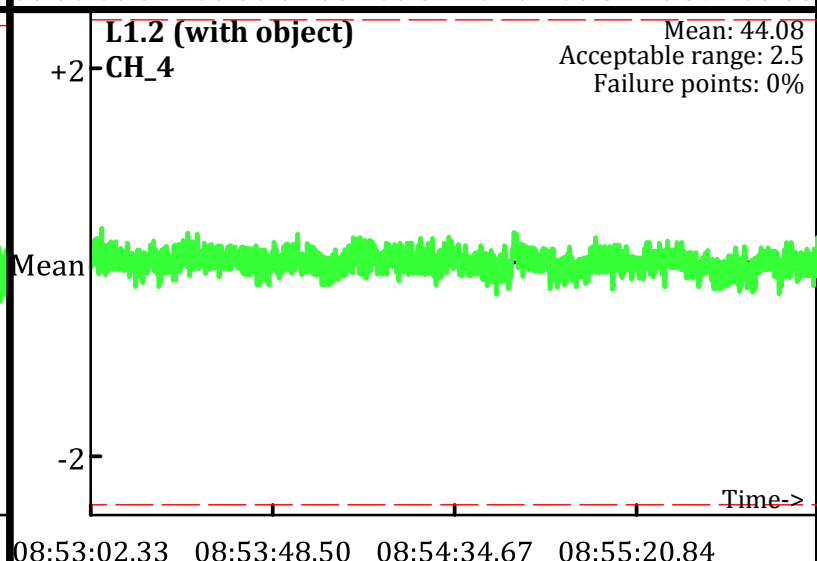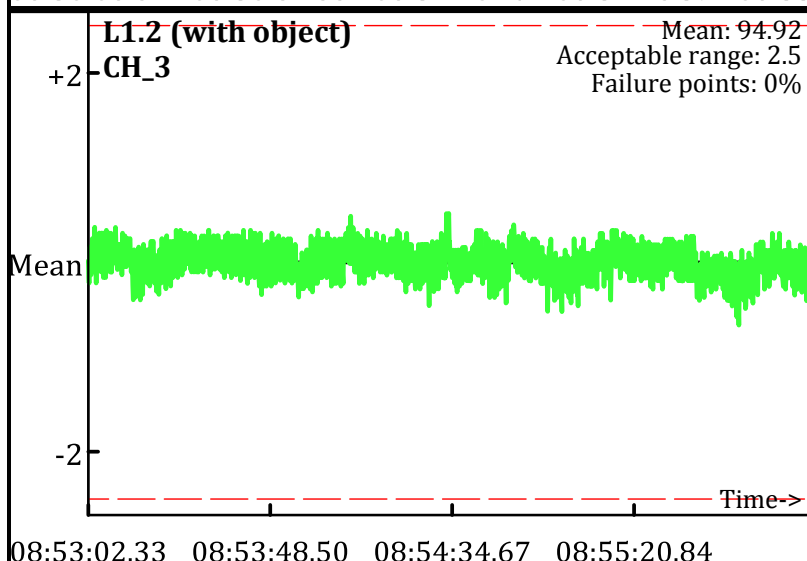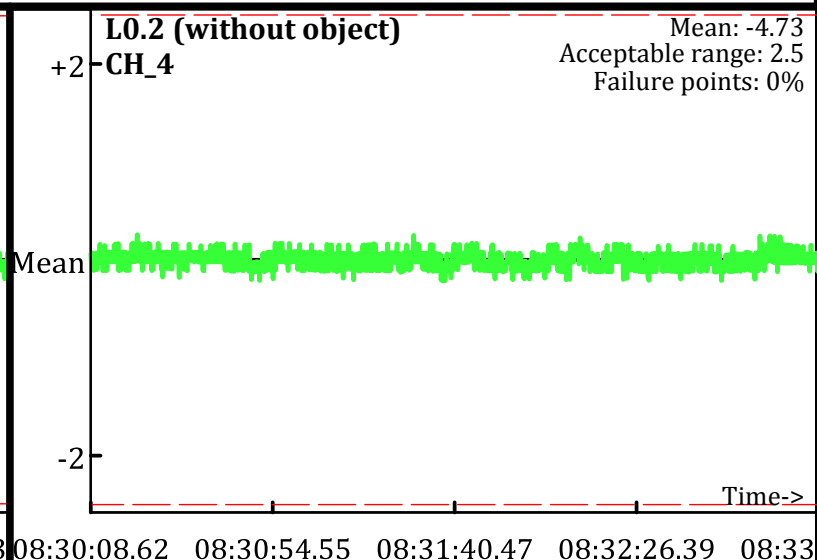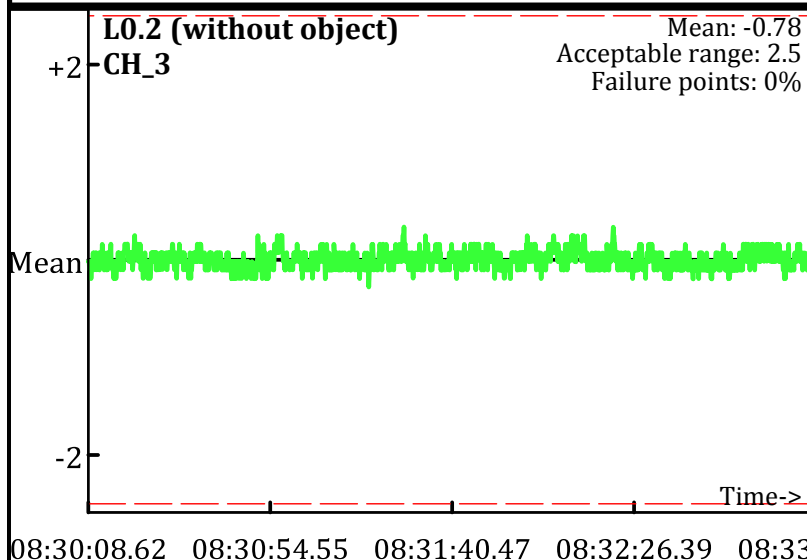– – – Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/14/2009

L0.2 (without object)
CH_3
Mean: -0.78
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:30:08.62   08:30:54.55   08:31:40.47   08:32:26.39   08:33

L0.2 (without object)
CH_4
Mean: -4.73
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:30:08.62   08:30:54.55   08:31:40.47   08:32:26.39   08:33

L1.2 (with object)
CH_3
Mean: 94.92
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:53:02.33   08:53:48.50   08:54:34.67   08:55:20.84

L1.2 (with object)
CH_4
Mean: 44.08
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:53:02.33   08:53:48.50   08:54:34.67   08:55:20.84

L2.2 (without object)
CH_3
Mean: -1.06
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:56:55.02   08:57:11.74   08:57:28.46   08:57:45.18   08:58

L2.2 (without object)
CH_4
Mean: -4.94
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:56:55.02   08:57:11.74   08:57:28.46   08:57:45.18   08:58

Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits
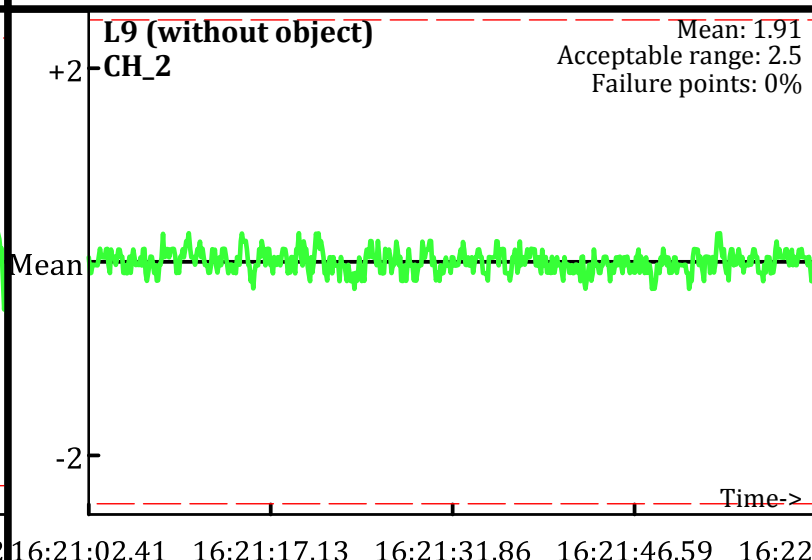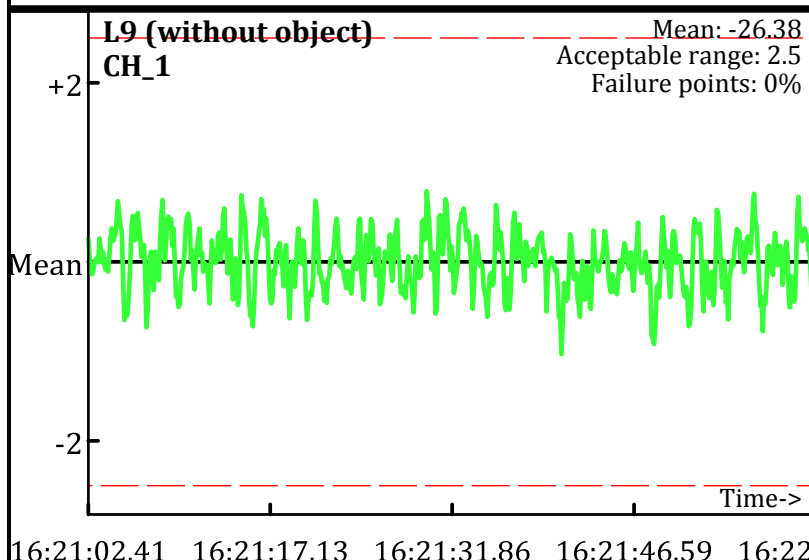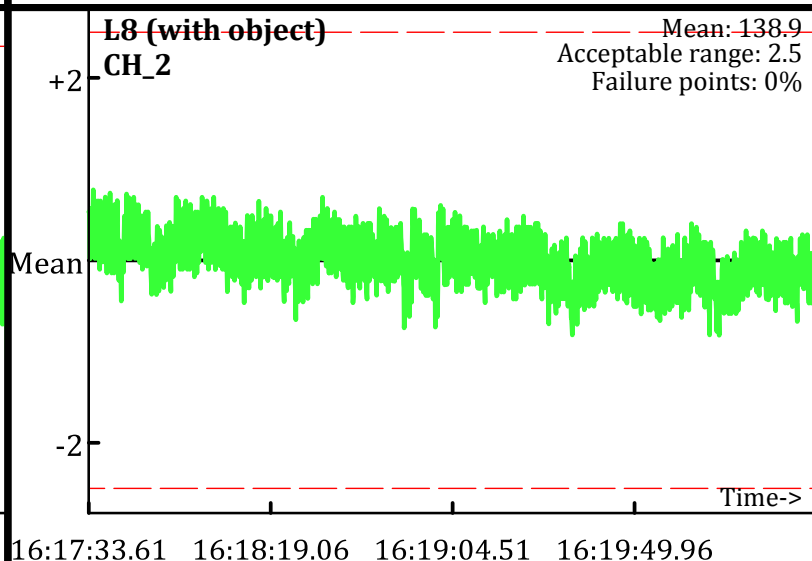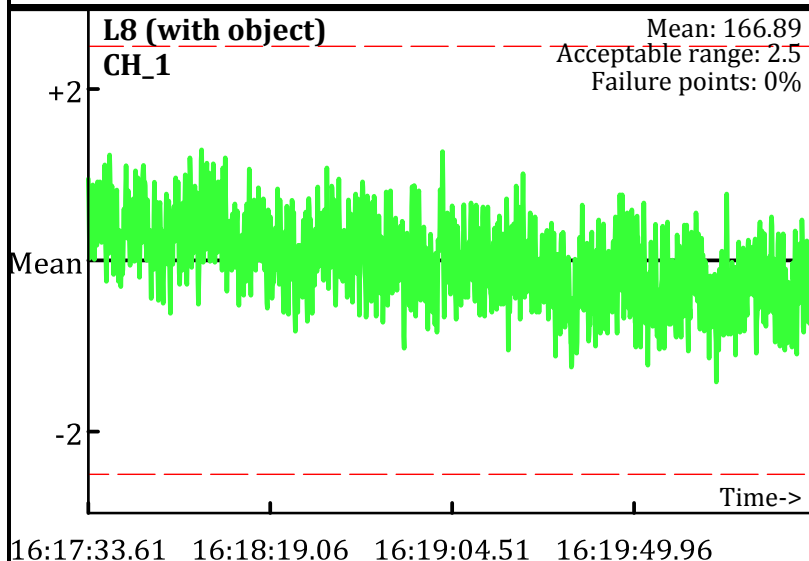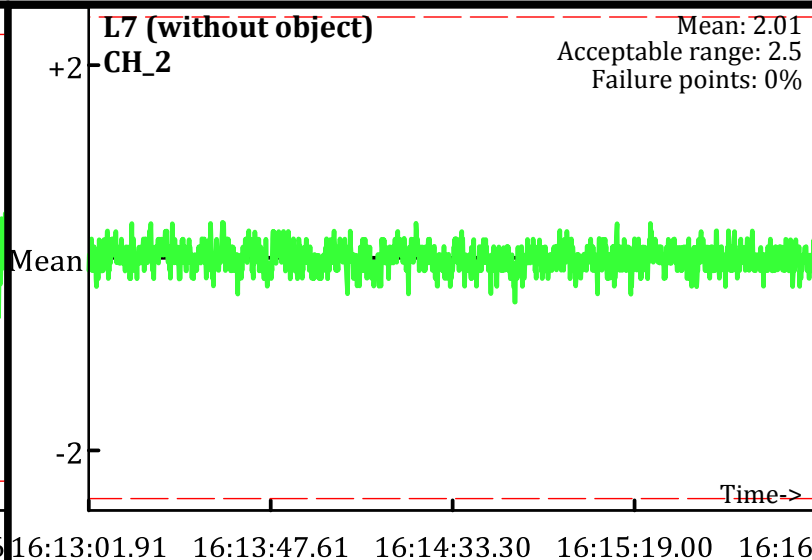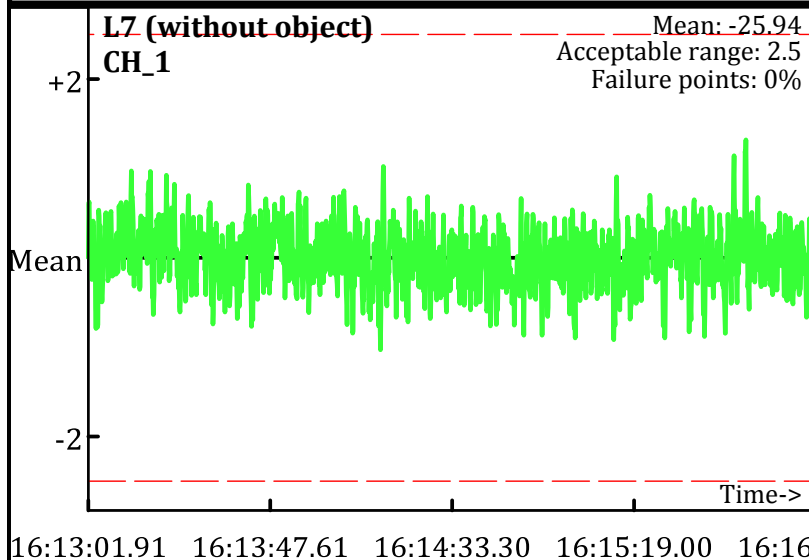
PM test
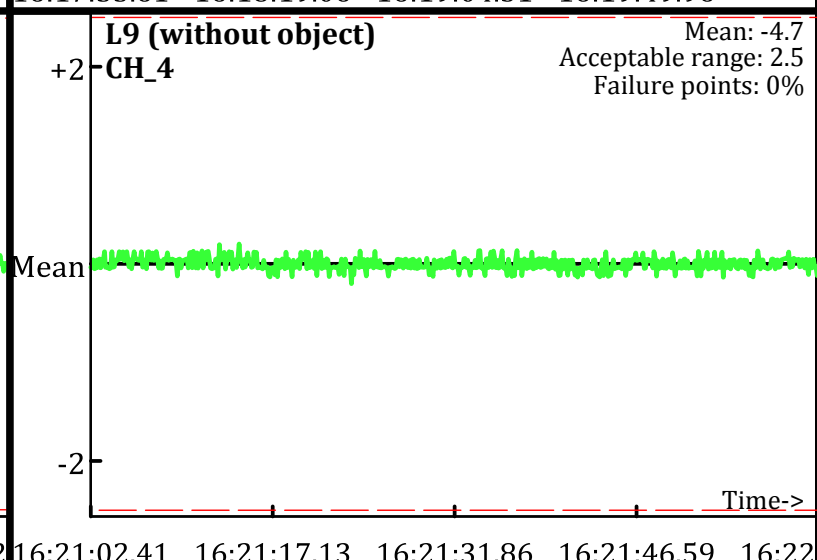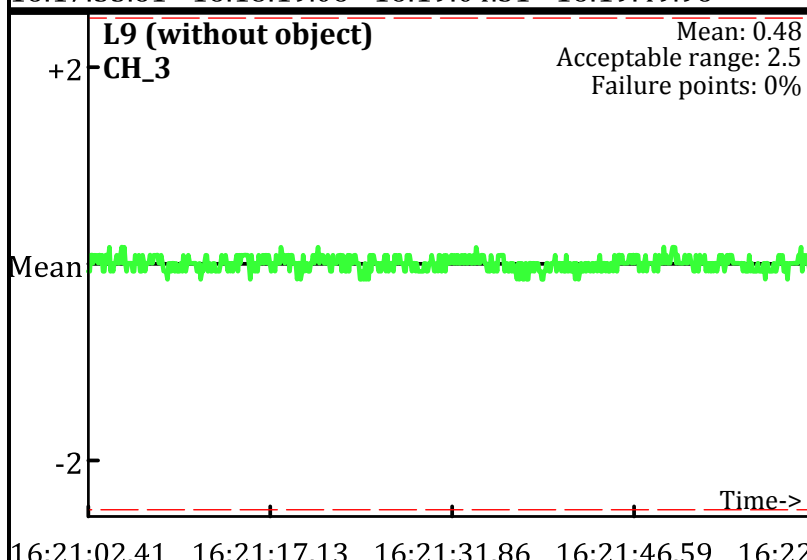Operator: BG & PAZ
Date: 7/14/2009

L7 (without object)
CH_1
Mean: -25.94
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:13:01.91   16:13:47.61   16:14:33.30   16:15:19.00   16:16

L7 (without object)
CH_2
Mean: 2.01
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:13:01.91   16:13:47.61   16:14:33.30   16:15:19.00   16:16

L8 (with object)
CH_1
Mean: 166.89
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:33.61   16:18:19.06   16:19:04.51   16:19:49.96

L8 (with object)
CH_2
Mean: 138.9
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:33.61   16:18:19.06   16:19:04.51   16:19:49.96

L9 (without object)
CH_1
Mean: -26.38
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:21:02.41   16:21:17.13   16:21:31.86   16:21:46.59   16:22

L9 (without object)
CH_2
Mean: 1.91
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:21:02.41   16:21:17.13   16:21:31.86   16:21:46.59   16:22

Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
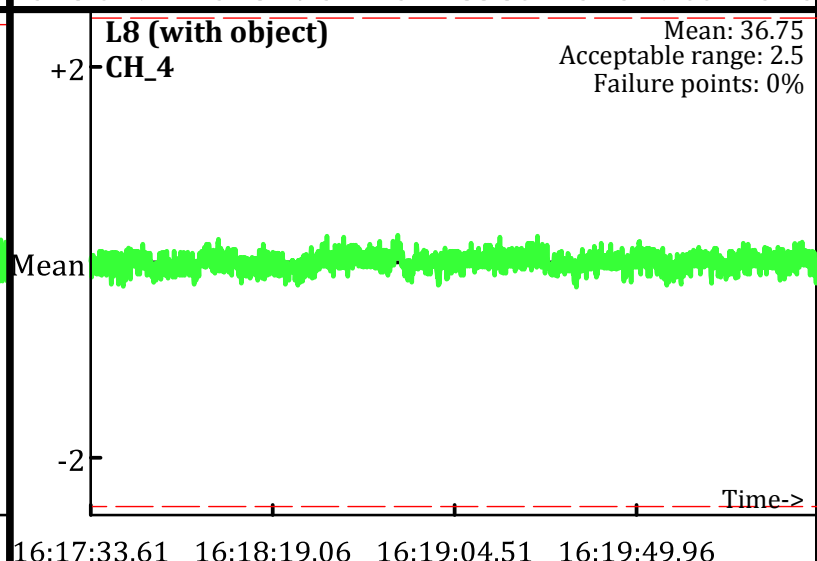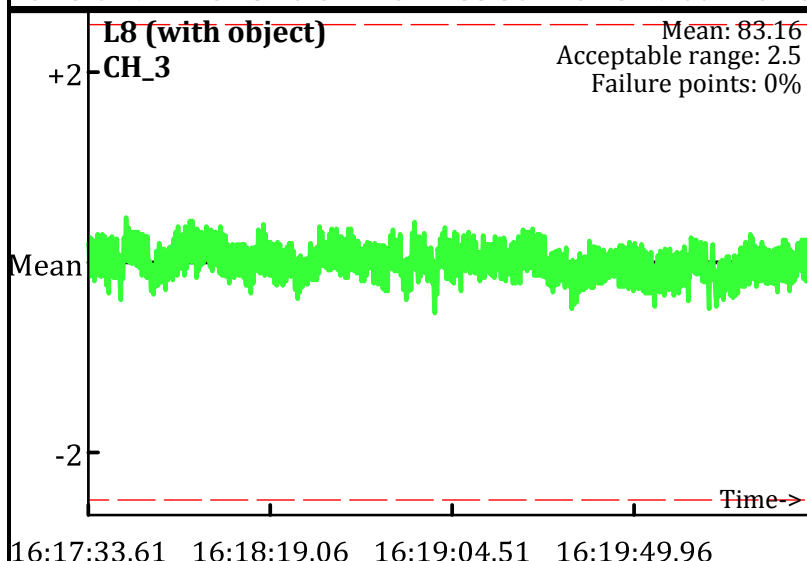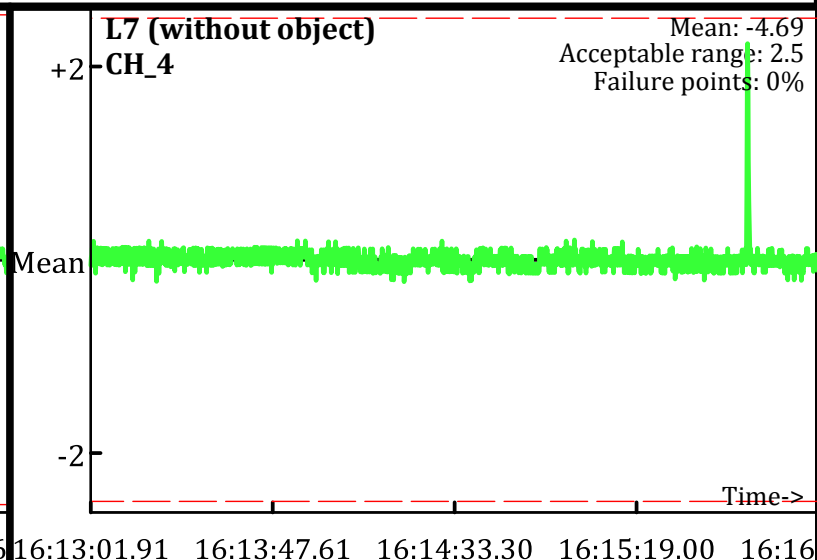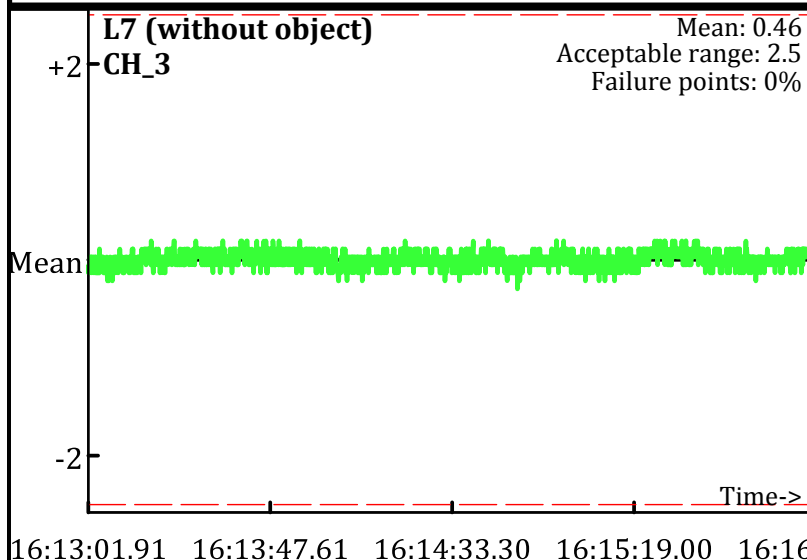Line Name: L7 L8 L9

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
– – – Acceptable limits

L7 (without object)
CH_3
Mean: 0.46
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:13:01.91   16:13:47.61   16:14:33.30   16:15:19.00   16:16

L7 (without object)
CH_4
Mean: -4.69
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:13:01.91   16:13:47.61   16:14:33.30   16:15:19.00   16:16

L8 (with object)
CH_3
Mean: 83.16
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:33.61   16:18:19.06   16:19:04.51   16:19:49.96

L8 (with object)
CH_4
Mean: 36.75
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:33.61   16:18:19.06   16:19:04.51   16:19:49.96

L9 (without object)
CH_3
Mean: 0.48
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:21:02.41   16:21:17.13   16:21:31.86   16:21:46.59   16:22

L9 (without object)
CH_4
Mean: -4.7
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:21:02.41   16:21:17.13   16:21:31.86   16:21:46.59   16:22

Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
Line Name: L7 L8 L9

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
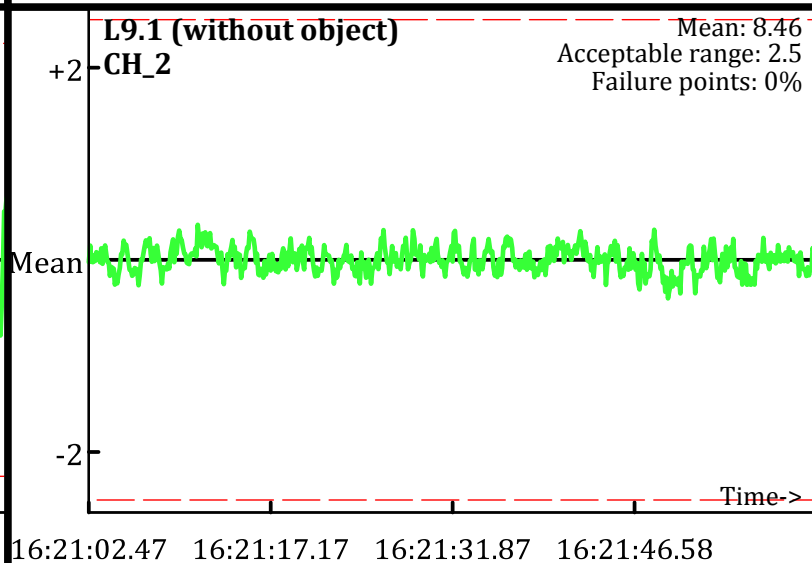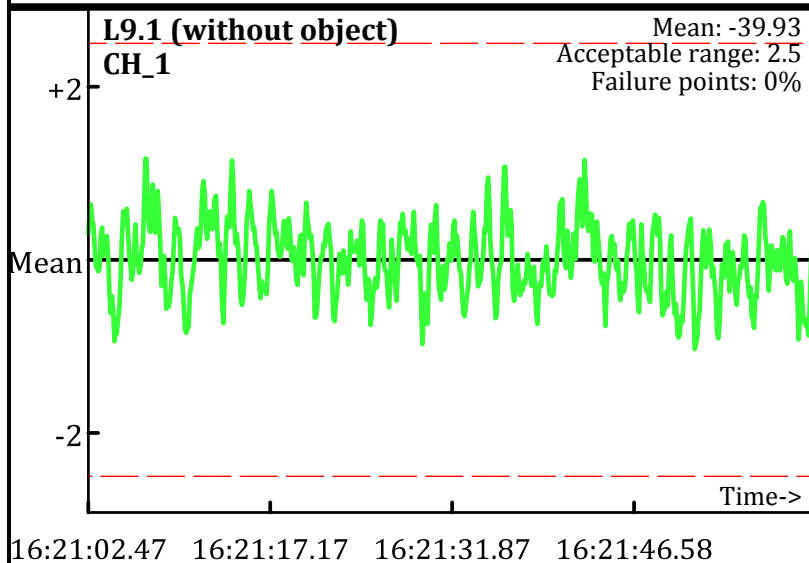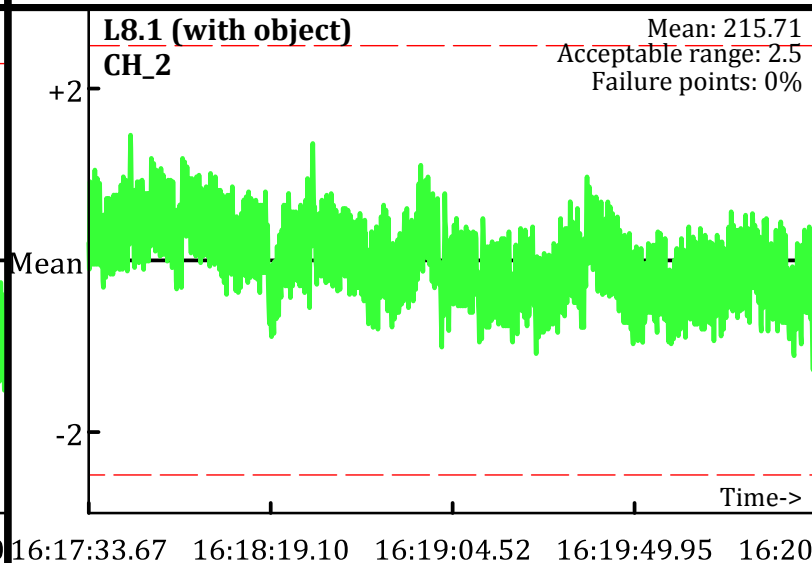Operator: BG & PAZ
Date: 7/14/2009

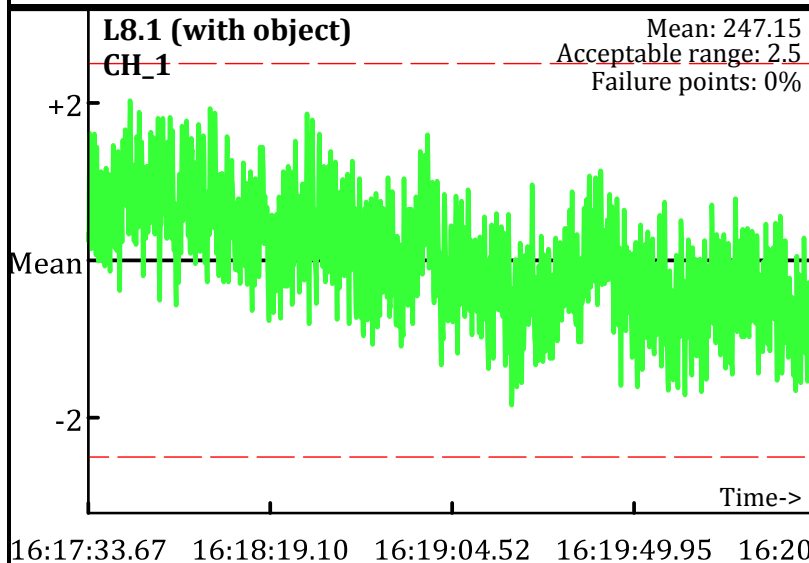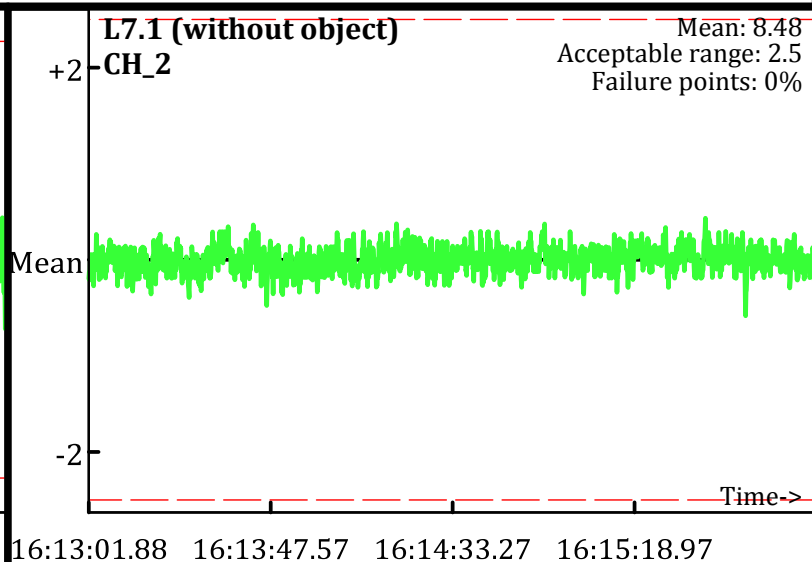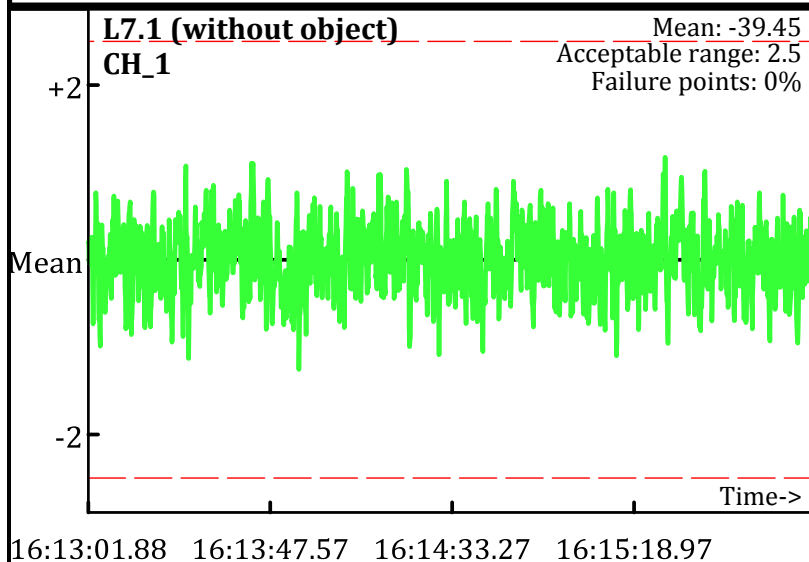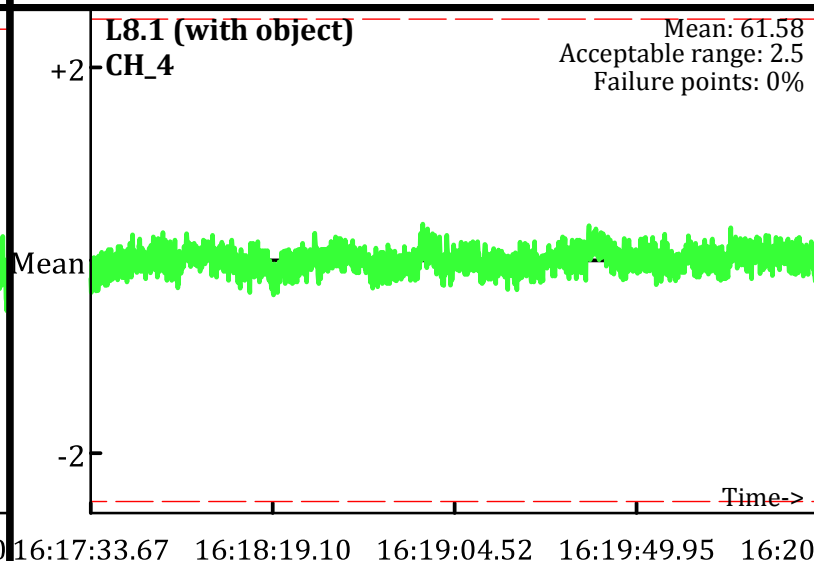**L7.1 (without object)**
CH_1
Mean: -39.45
Acceptable range: 2.5
Failure points: 0%

Time->

16:13:01.88   16:13:47.57   16:14:33.27   16:15:18.97

L7.1 (without object)
CH_2
Mean: 8.48
Acceptable range: 2.5
Failure points: 0%

Time->

16:13:01.88   16:13:47.57   16:14:33.27   16:15:18.97

L8.1 (with object)
CH_1
Mean: 247.15
Acceptable range: 2.5
Failure points: 0%

Time->

16:17:33.67   16:18:19.10   16:19:04.52   16:19:49.95   16:20

L8.1 (with object)
CH_2
Mean: 215.71
Acceptable range: 2.5
Failure points: 0%

Time->

16:17:33.67   16:18:19.10   16:19:04.52   16:19:49.95   16:20

L9.1 (without object)
CH_1
Mean: -39.93
Acceptable range: 2.5
Failure points: 0%

Time->

16:21:02.47   16:21:17.17   16:21:31.87   16:21:46.58

L9.1 (without object)
CH_2
Mean: 8.46
Acceptable range: 2.5
Failure points: 0%

Time->

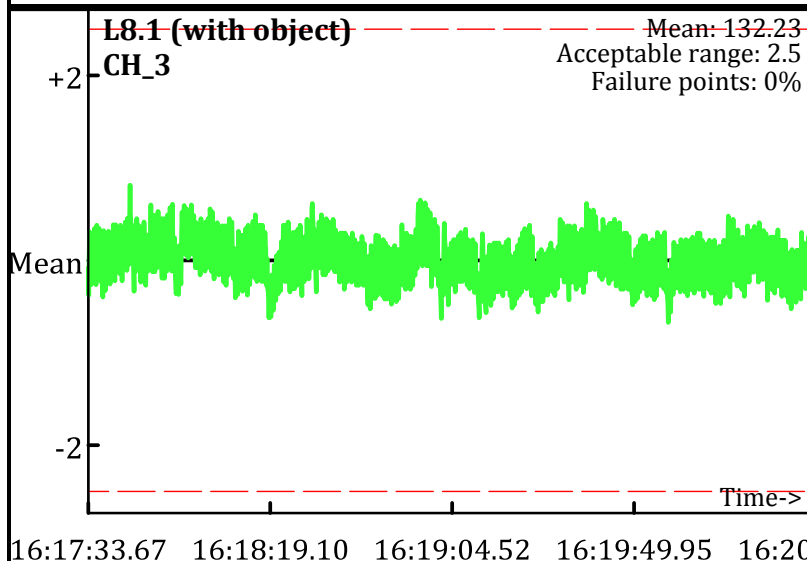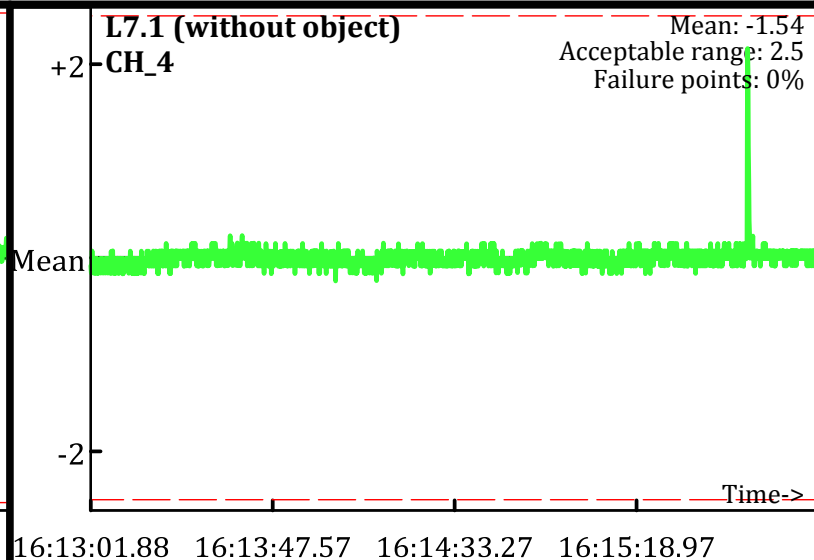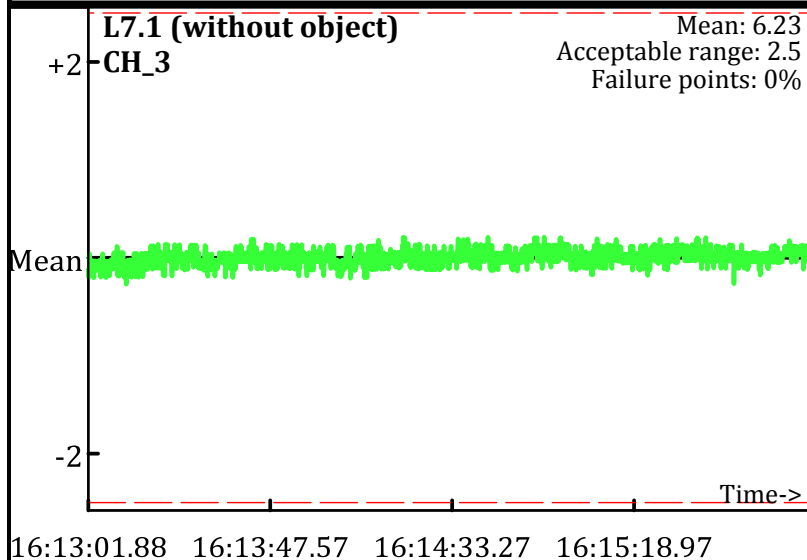16:21:02.47   16:21:17.17   16:21:31.87   16:21:46.58

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
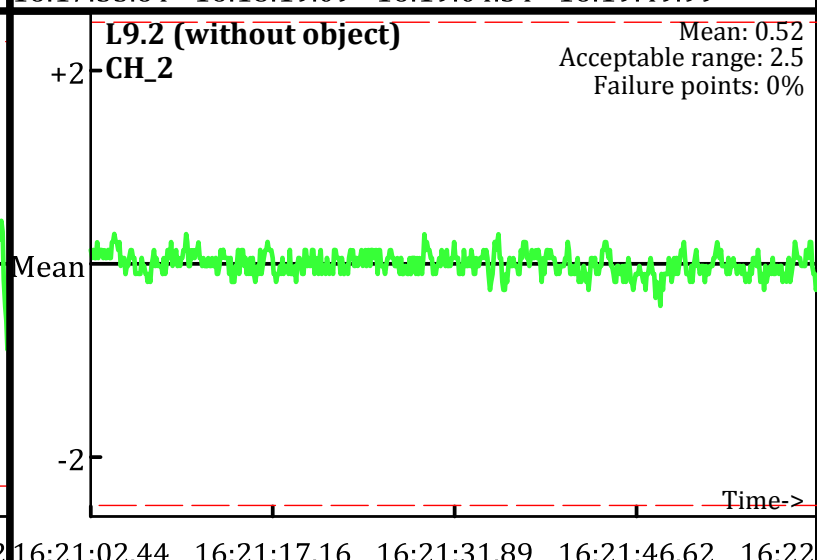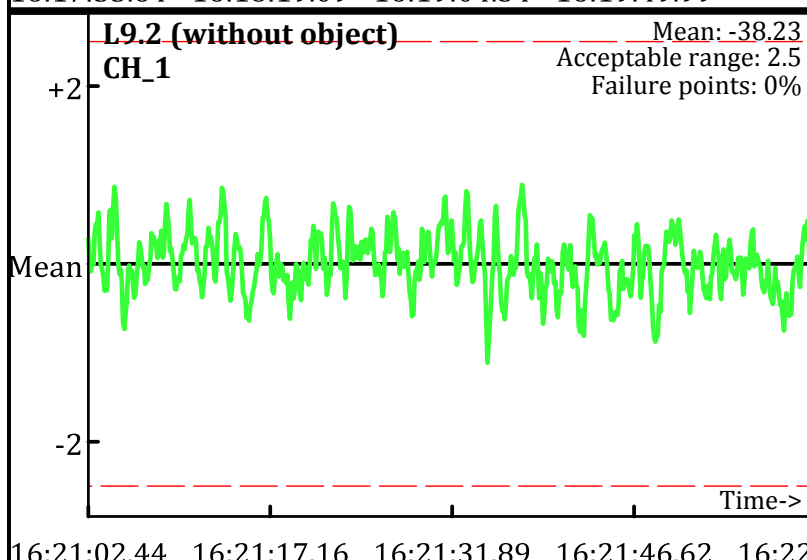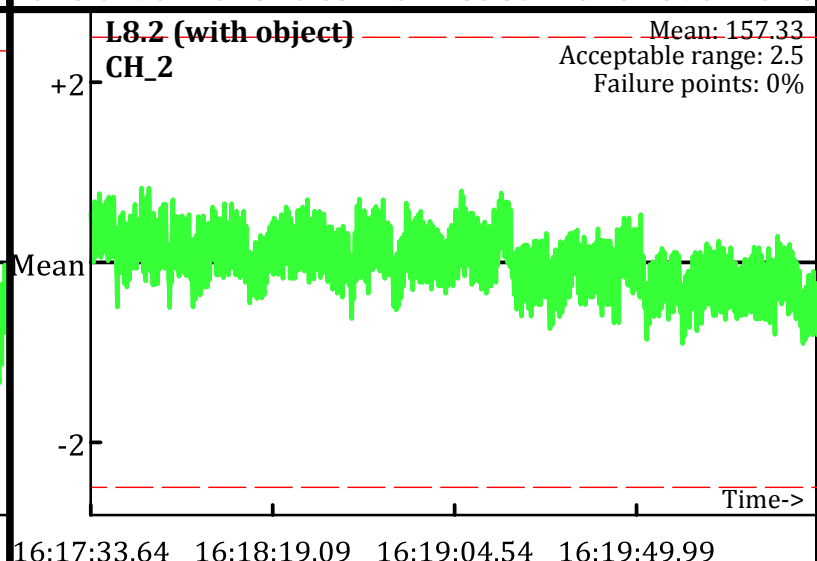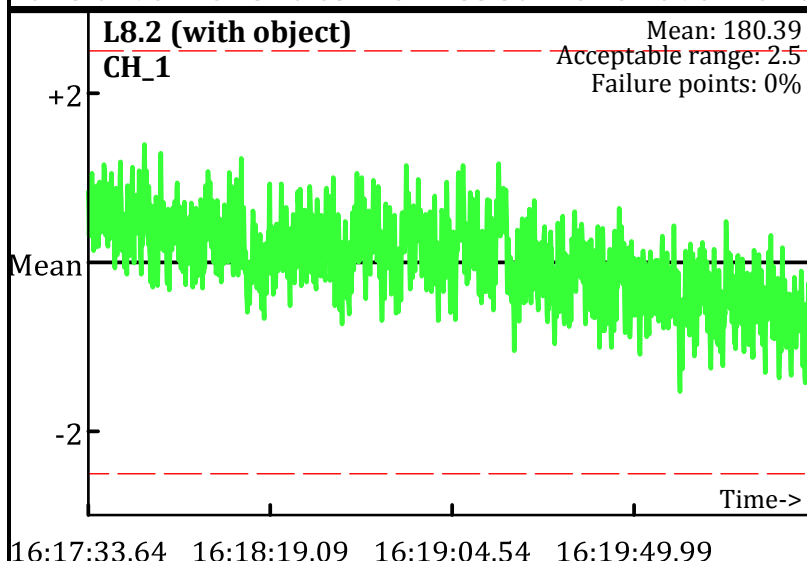Operator: BG & PAZ
Date: 7/14/2009

L7.1 (without object)
CH_3
Mean: 6.23
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:13:01.88 16:13:47.57 16:14:33.27 16:15:18.97

L7.1 (without object)
CH_4
Mean: -1.54
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:13:01.88 16:13:47.57 16:14:33.27 16:15:18.97

L8.1 (with object)
CH_3
Mean: 132.23
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:33.67 16:18:19.10 16:19:04.52 16:19:49.95 16:20

L8.1 (with object)
CH_4
Mean: 61.58
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:33.67 16:18:19.10 16:19:04.52 16:19:49.95 16:20

L9.1 (without object)
CH_3
Mean: 6.3
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:21:02.47 16:21:17.17 16:21:31.87 16:21:46.58

L9.1 (without object)
CH_4
Mean: -1.53
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:21:02.47 16:21:17.17 16:21:31.87 16:21:46.58

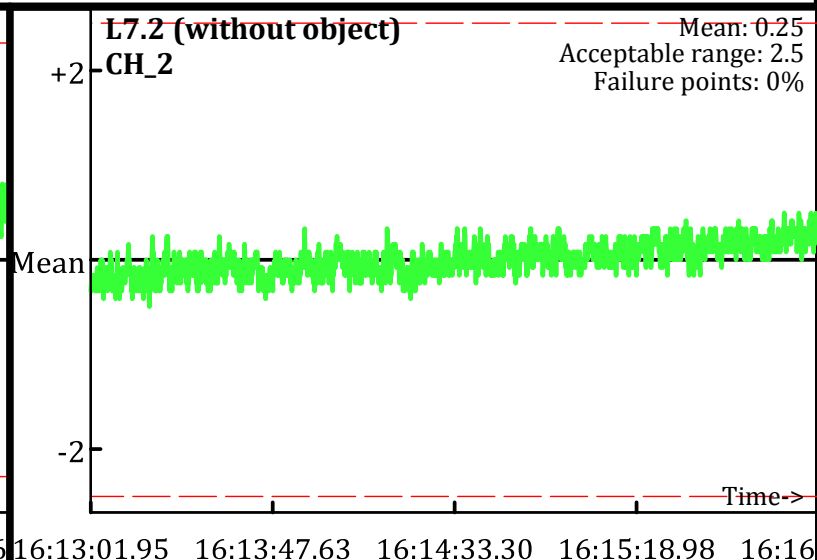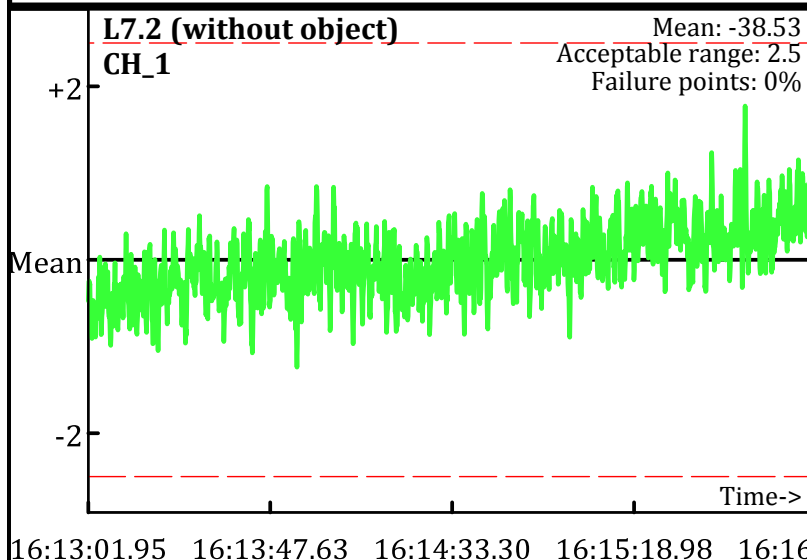Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
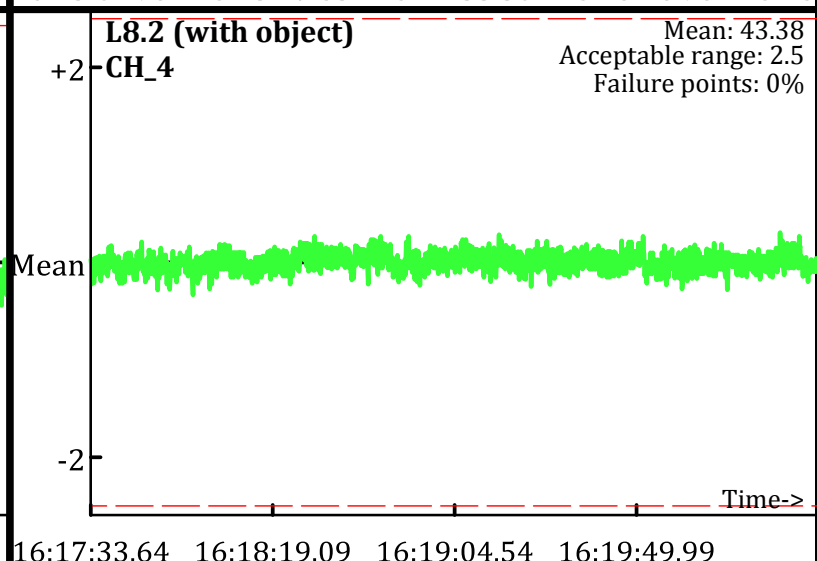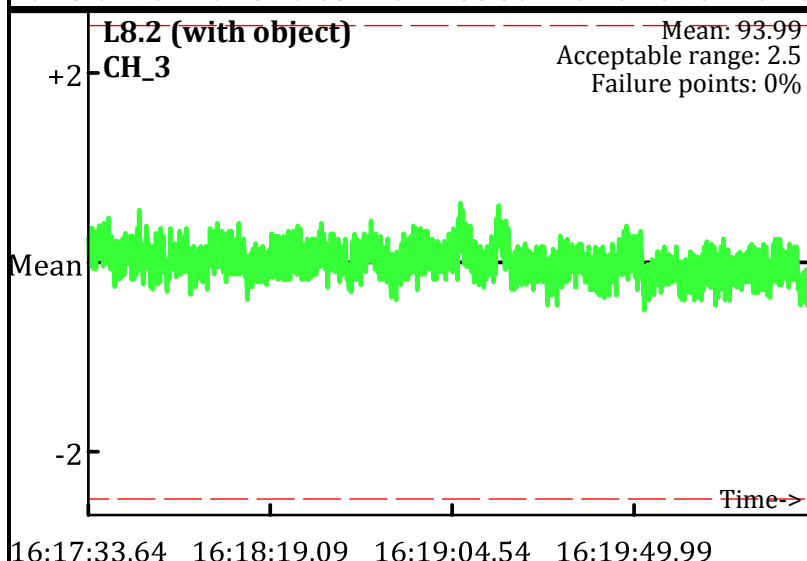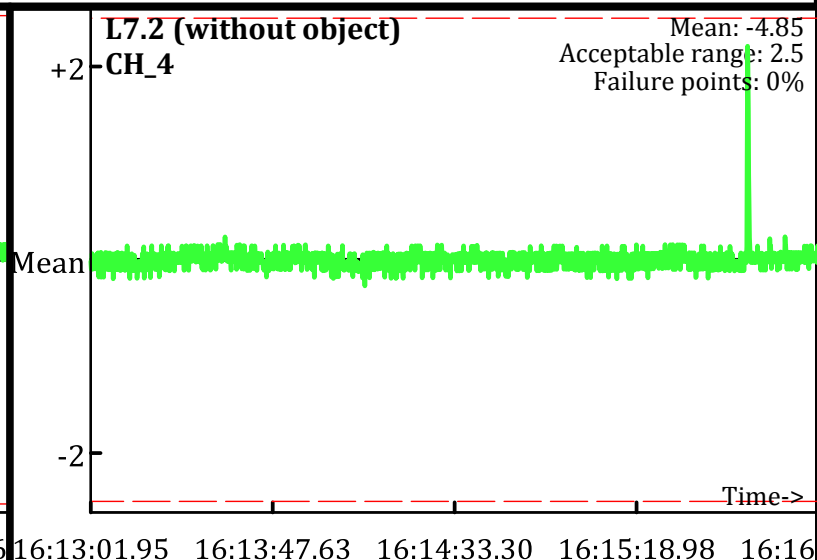Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/14/2009

L7.2 (without object)
CH_1
Mean: -38.53
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_2
Mean: 0.25
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_1
Mean: 180.39
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_2
Mean: 157.33
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object)
CH_1
Mean: -38.23
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object)
CH_2
Mean: 0.52
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\071409\QC\071409_TA_QC.gdb
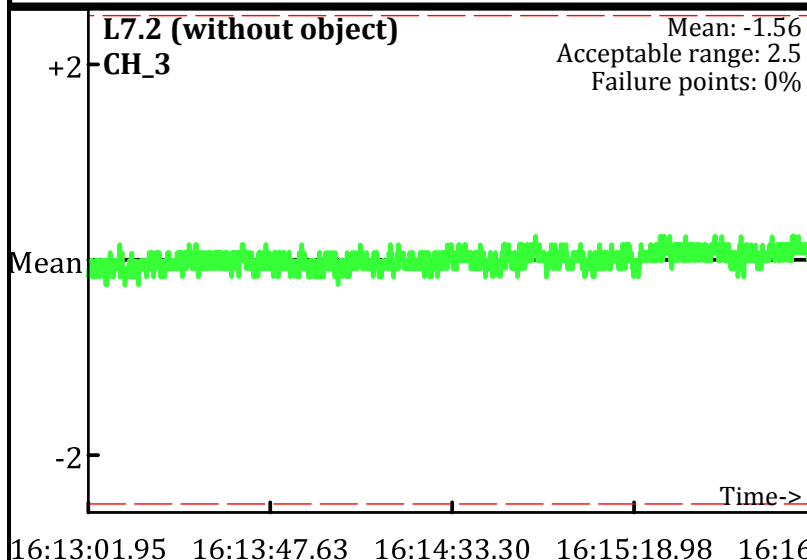Line Name: L7.2 L8.2 L9.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
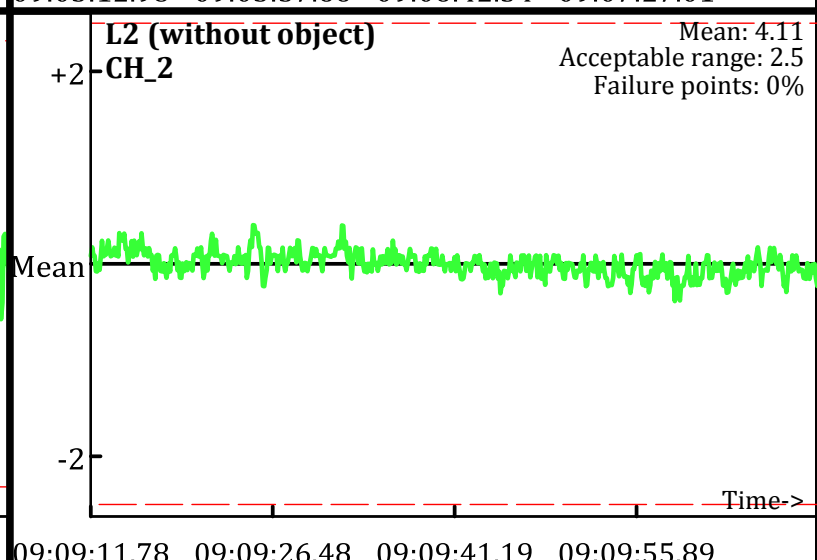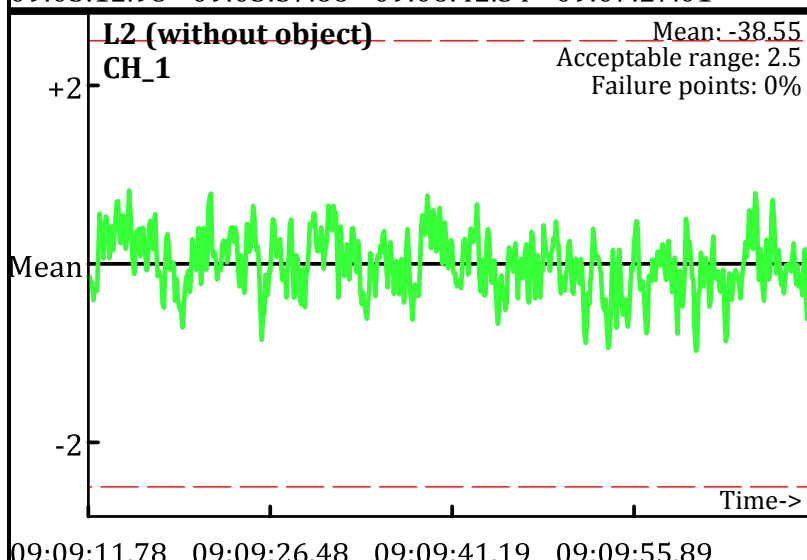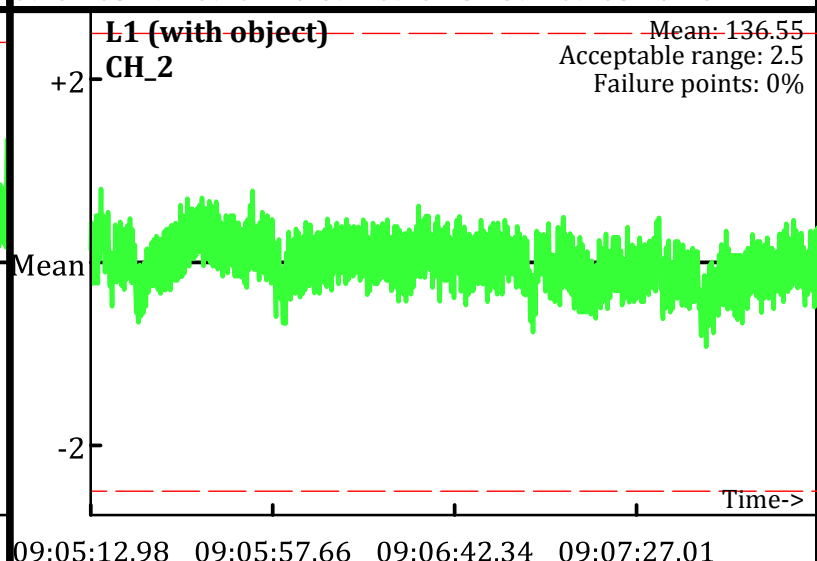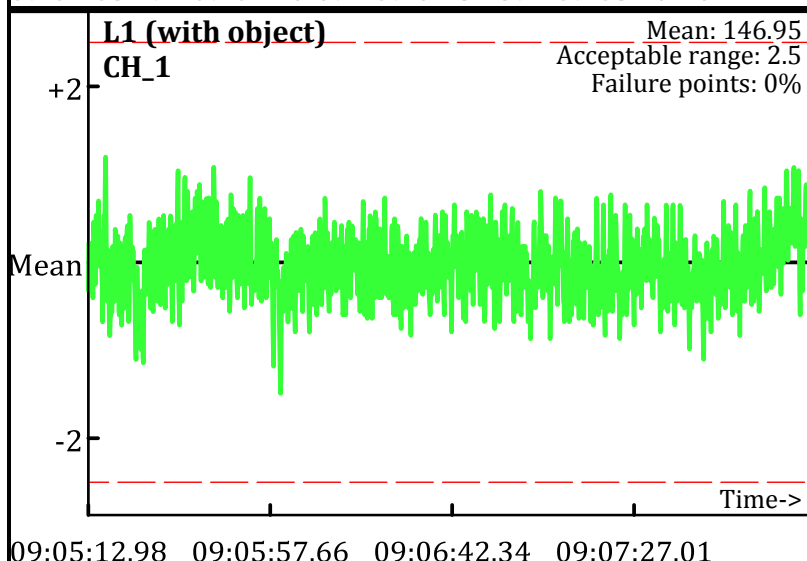Operator: BG & PAZ
Date: 7/14/2009

L7.2 (without object)
CH_3
Mean: -1.56
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_4
Mean: -4.85
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_3
Mean: 93.99
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_4
Mean: 43.38
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object)
CH_3
Mean: -1.43
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object)
CH_4
Mean: -4.83
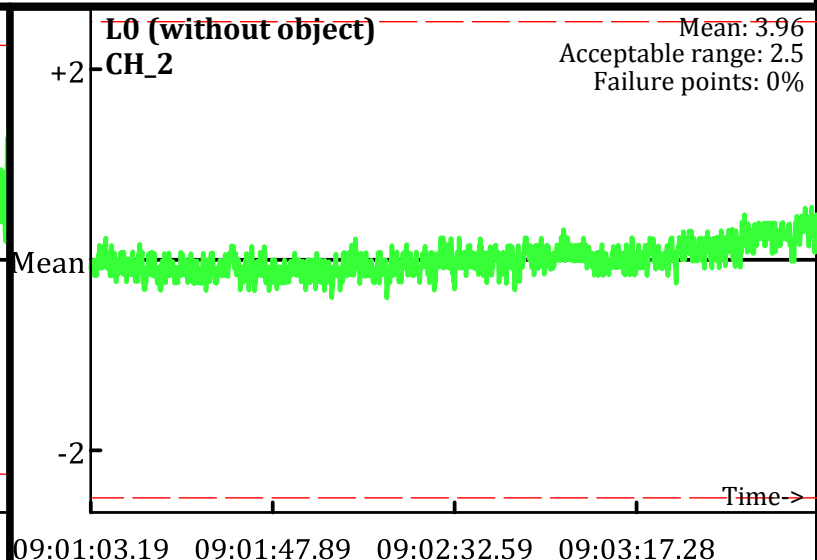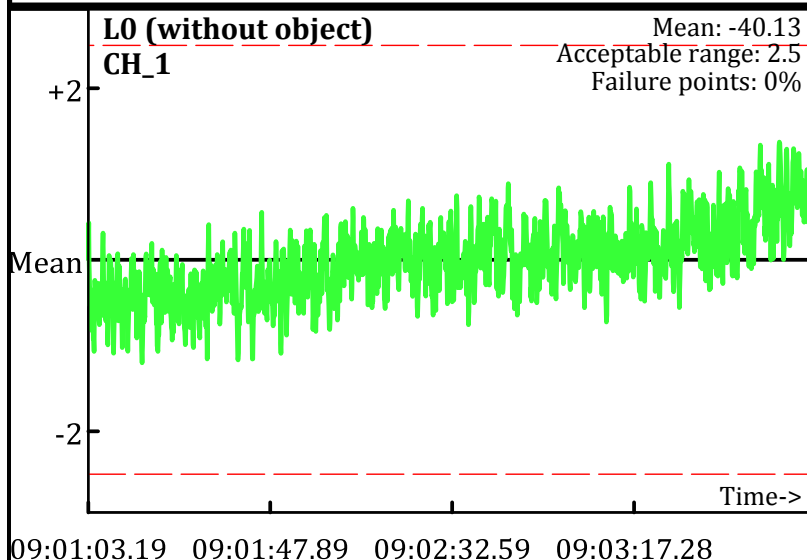Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
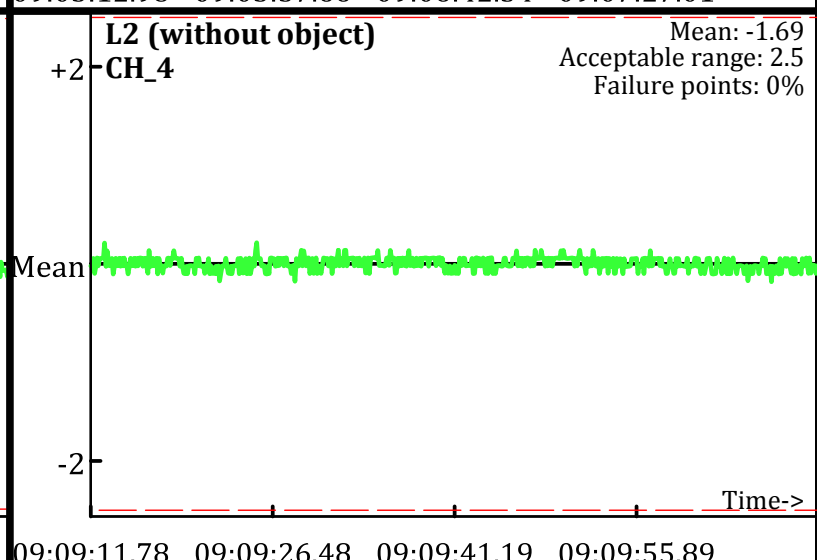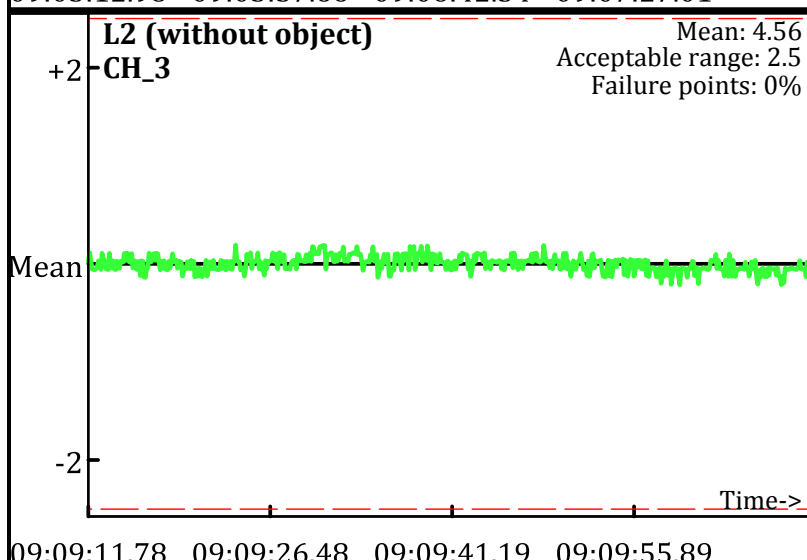Operator: BG & PAZ
Date: 7/16/2009

L0 (without object)
CH_1
Mean: -40.13
Acceptable range: 2.5
Failure points: 0%

Time->
09:01:03.19　09:01:47.89　09:02:32.59　09:03:17.28

L0 (without object)
CH_2
Mean: 3.96
Acceptable range: 2.5
Failure points: 0%

Time->
09:01:03.19　09:01:47.89　09:02:32.59　09:03:17.28

L1 (with object)
CH_1
Mean: 146.95
Acceptable range: 2.5
Failure points: 0%

Time->
09:05:12.98　09:05:57.66　09:06:42.34　09:07:27.01

L1 (with object)
CH_2
Mean: 136.55
Acceptable range: 2.5
Failure points: 0%

Time->
09:05:12.98　09:05:57.66　09:06:42.34　09:07:27.01

L2 (without object)
CH_1
Mean: -38.55
Acceptable range: 2.5
Failure points: 0%

Time->
09:09:11.78　09:09:26.48　09:09:41.19　09:09:55.89

L2 (without object)
CH_2
Mean: 4.11
Acceptable range: 2.5
Failure points: 0%

Time->
09:09:11.78　09:09:26.48　09:09:41.19　09:09:55.89

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
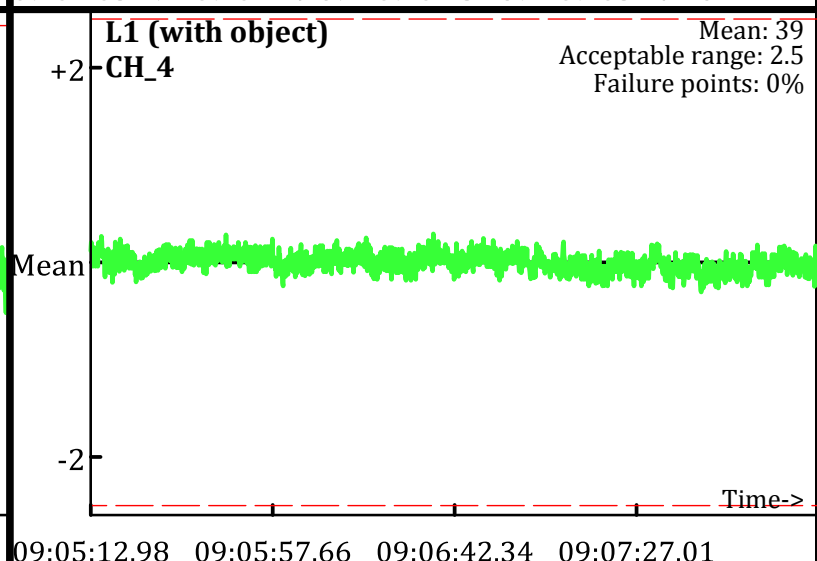Line Name: L0 L1 L2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
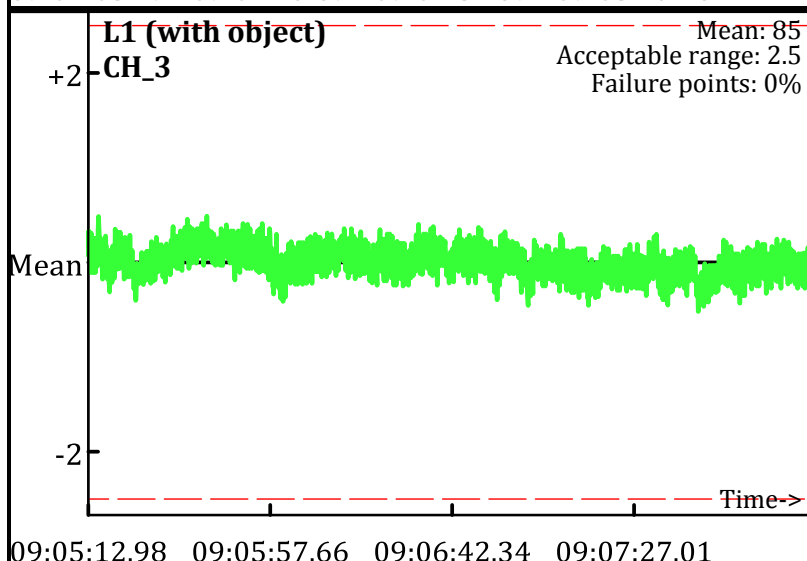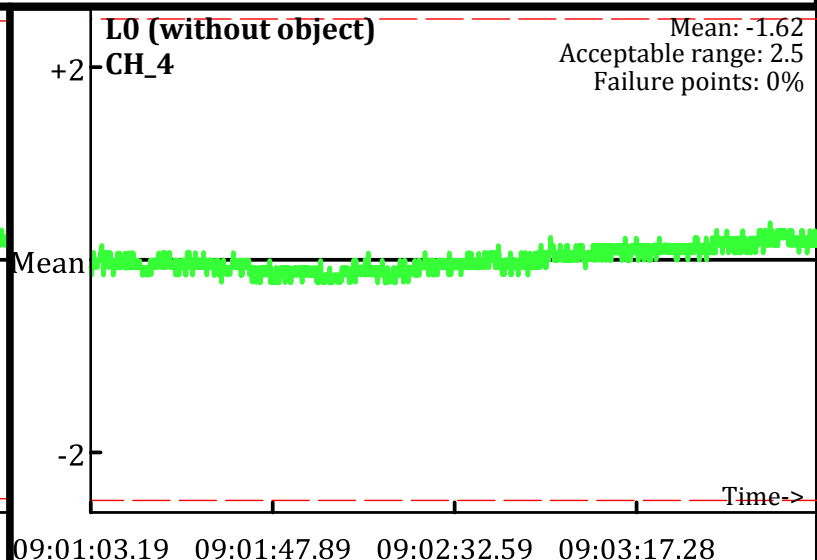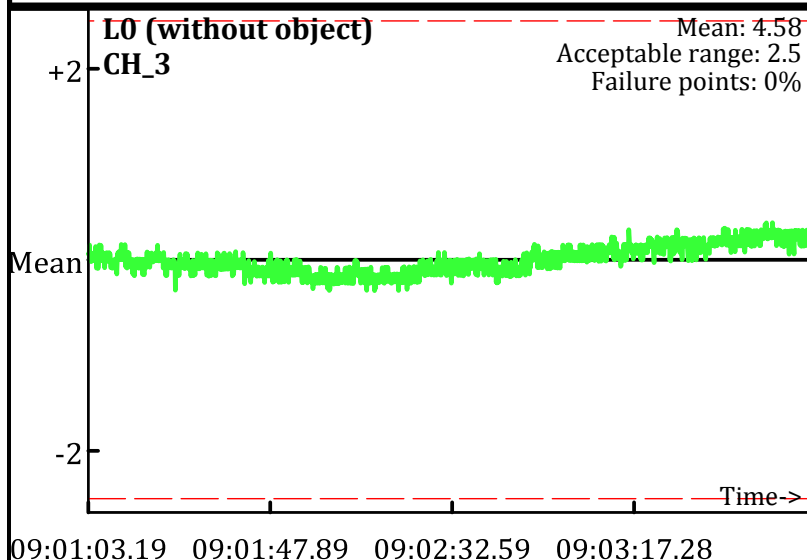– – – Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/16/2009
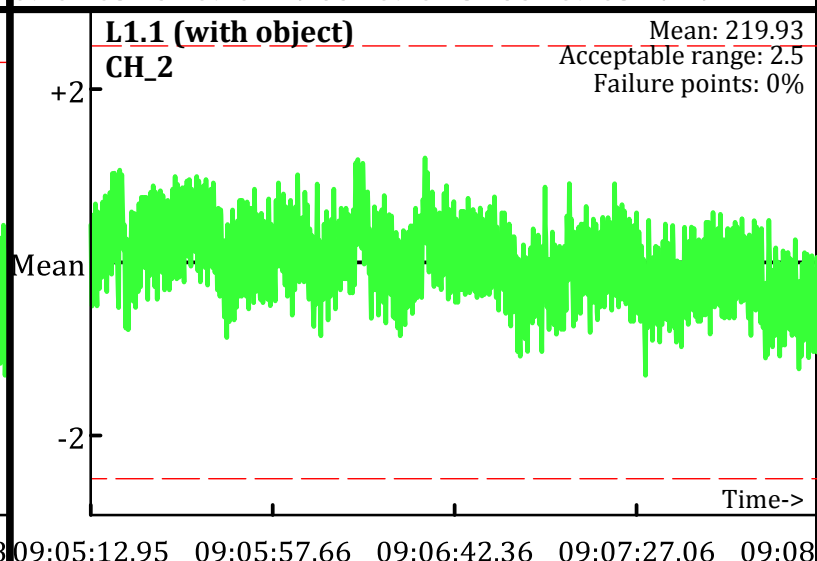

L0 (without object)
CH_3
Mean: 4.58
Acceptable range: 2.5
Failure points: 0%

09:01:03.19   09:01:47.89   09:02:32.59   09:03:17.28

L0 (without object)
CH_4
Mean: -1.62
Acceptable range: 2.5
Failure points: 0%

09:01:03.19   09:01:47.89   09:02:32.59   09:03:17.28

L1 (with object)
CH_3
Mean: 85
Acceptable range: 2.5
Failure points: 0%

09:05:12.98   09:05:57.66   09:06:42.34   09:07:27.01

L1 (with object)
CH_4
Mean: 39
Acceptable range: 2.5
Failure points: 0%

09:05:12.98   09:05:57.66   09:06:42.34   09:07:27.01

L2 (without object)
CH_3
Mean: 4.56
Acceptable range: 2.5
Failure points: 0%

09:09:11.78   09:09:26.48   09:09:41.19   09:09:55.89

L2 (without object)
CH_4
Mean: -1.69
Acceptable range: 2.5
Failure points: 0%

09:09:11.78   09:09:26.48   09:09:41.19   09:09:55.89

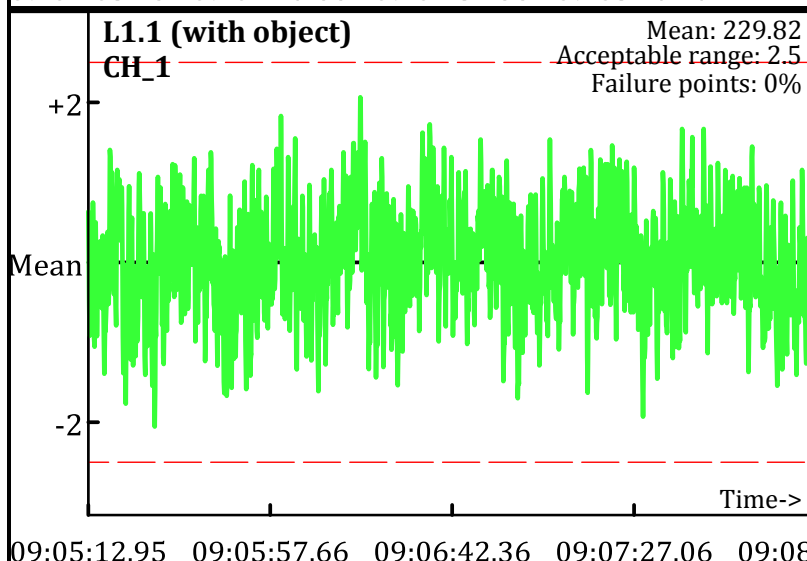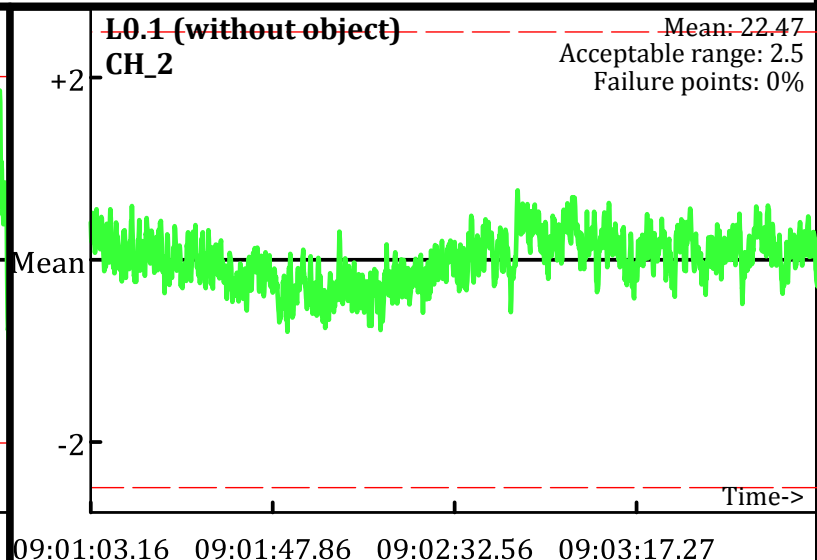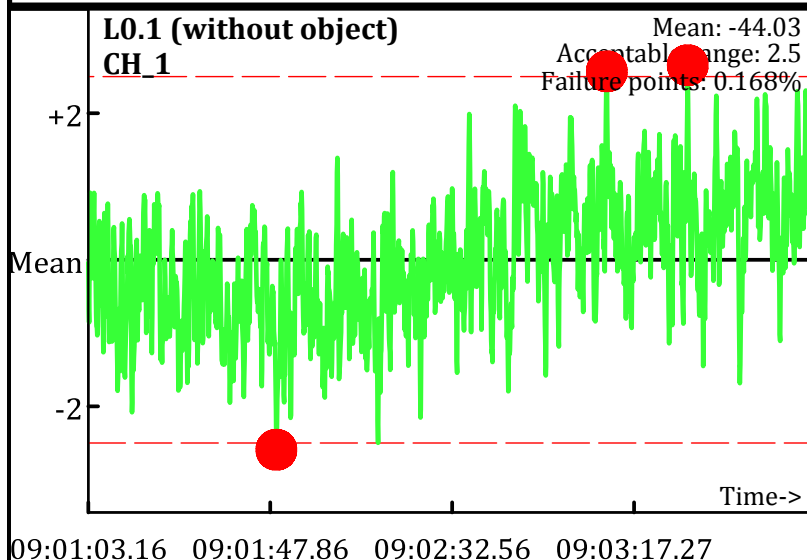Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
Line Name: L0 L1 L2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/16/2009
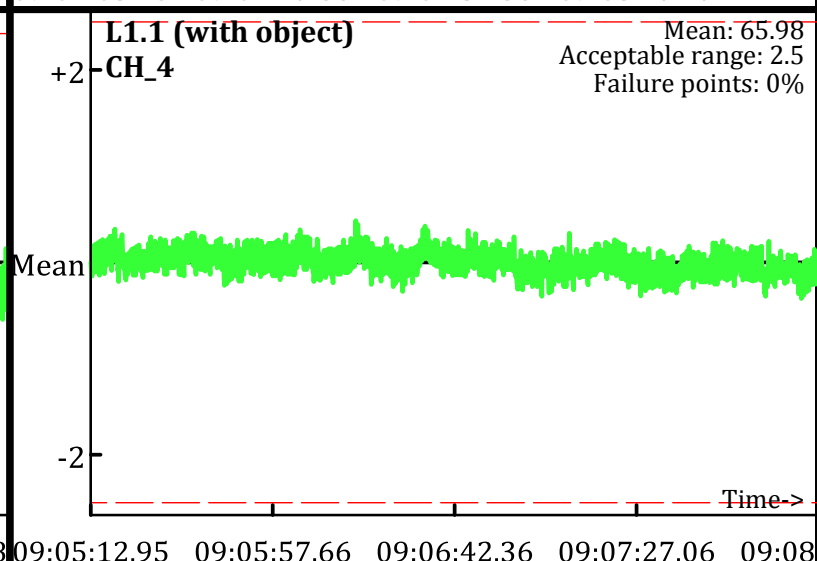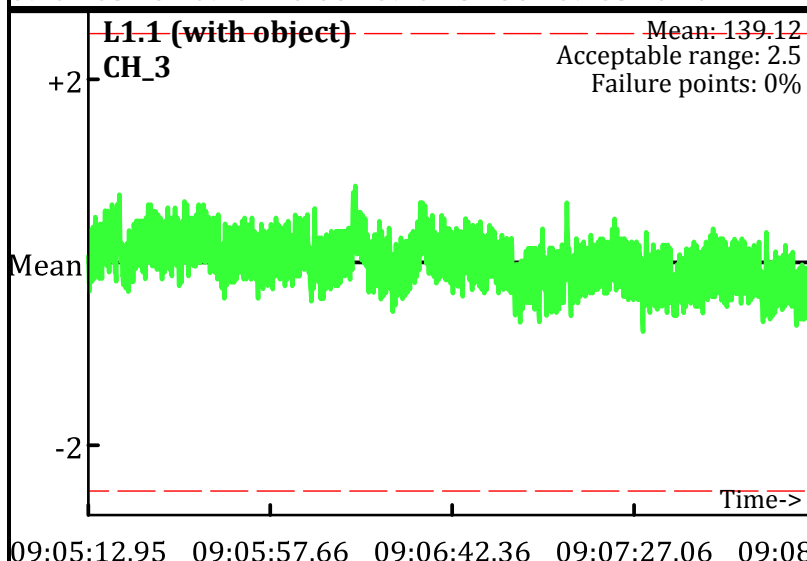
L0.1 (without object)
CH_1

Mean: -44.03
Acceptable range: 2.5
Failure points: 0.168%

Mean

09:01:03.16   09:01:47.86   09:02:32.56   09:03:17.27

L0.1 (without object)
CH_2

Mean: 22.47
Acceptable range: 2.5
Failure points: 0%

Mean

09:01:03.16   09:01:47.86   09:02:32.56   09:03:17.27

L1.1 (with object)
CH_1

Mean: 229.82
Acceptable range: 2.5
Failure points: 0%

Mean

09:05:12.95   09:05:57.66   09:06:42.36   09:07:27.06   09:08

L1.1 (with object)
CH_2

Mean: 219.93
Acceptable range: 2.5
Failure points: 0%

Mean

09:05:12.95   09:05:57.66   09:06:42.36   09:07:27.06   09:08

L2.1 (without object)
CH_1

Mean: -42.55
Acceptable range: 2.5
Failure points: 0%

Mean

09:09:11.75   09:09:26.48   09:09:41.20   09:09:55.93

L2.1 (without object)
CH_2

Mean: 22.08
Acceptable range: 2.5
Failure points: 0%

Mean

09:09:11.75   09:09:26.48   09:09:41.20   09:09:55.93

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
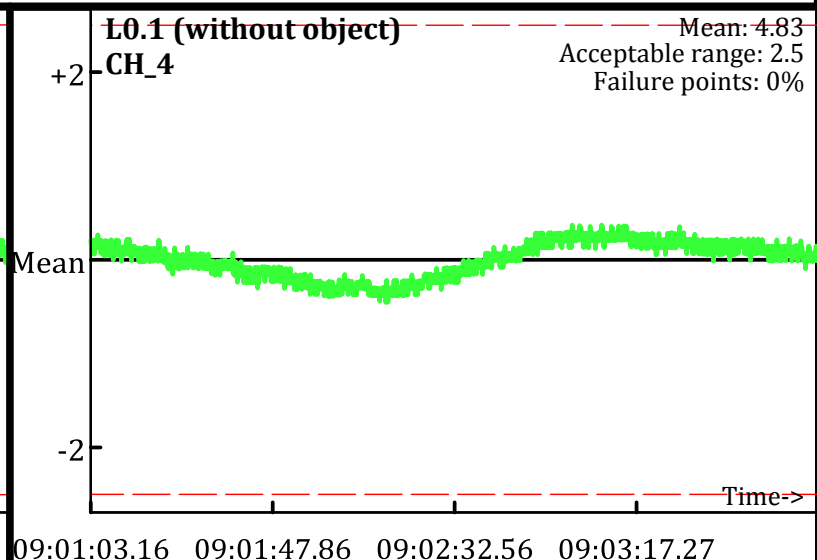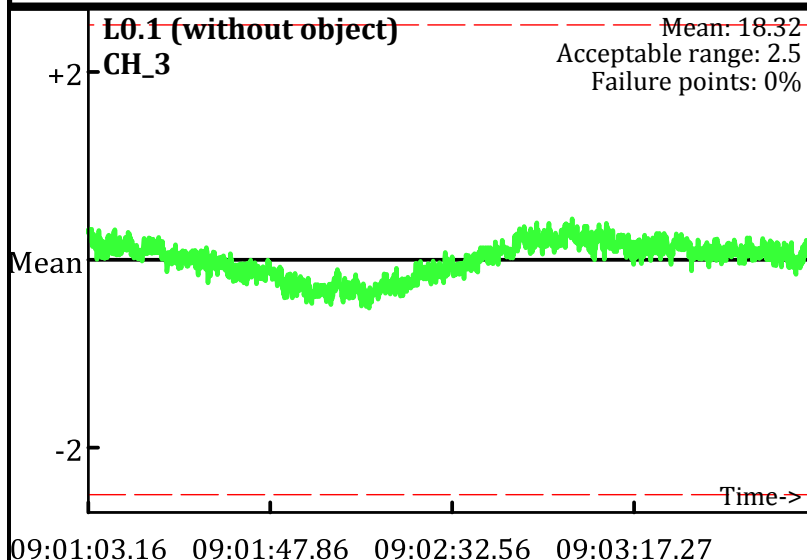Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
— — Acceptable limits

AM test
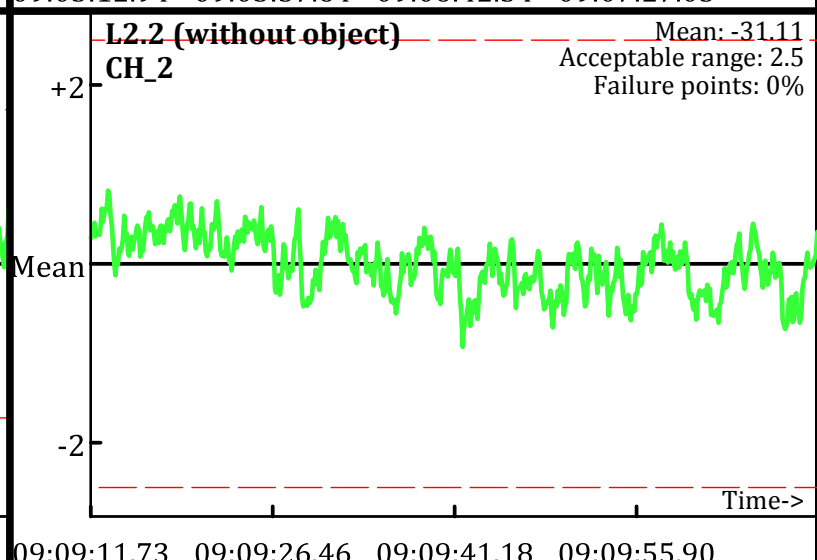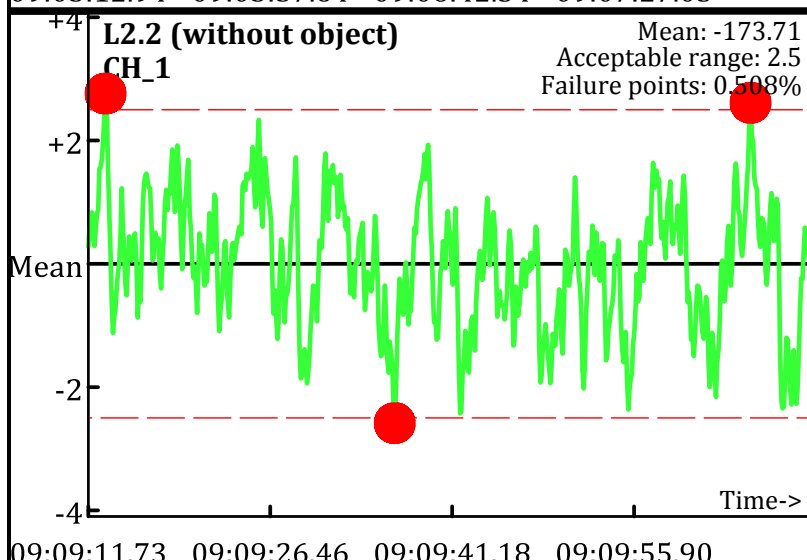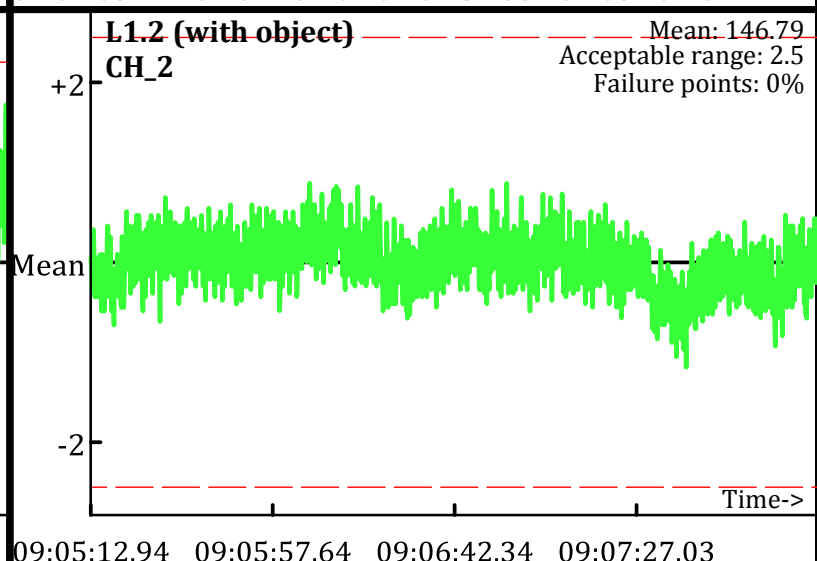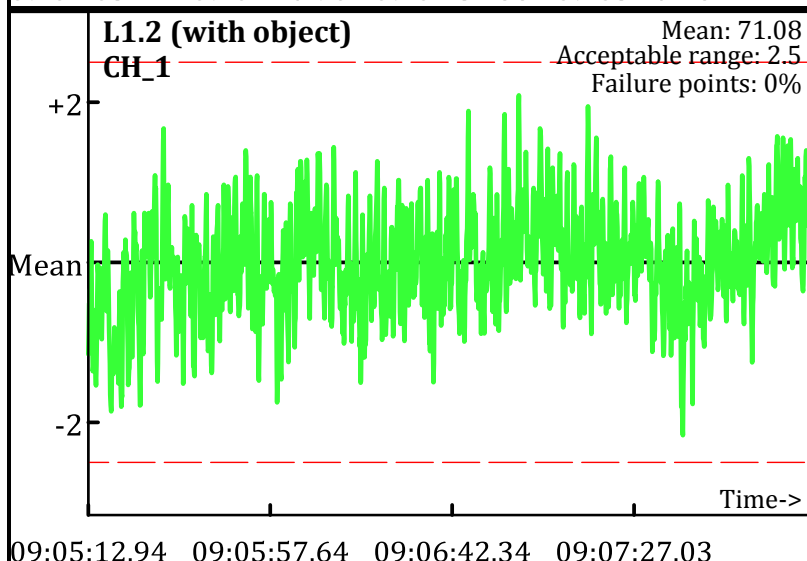Operator: BG & PAZ
Date: 7/16/2009

L0.1 (without object)
CH_3
Mean: 18.32
Acceptable range: 2.5
Failure points: 0%

L0.1 (without object)
CH_4
Mean: 4.83
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_3
Mean: 139.12
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_4
Mean: 65.98
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_3
Mean: 17.95
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_4
Mean: 4.71
Acceptable range: 2.5
Failure points: 0%

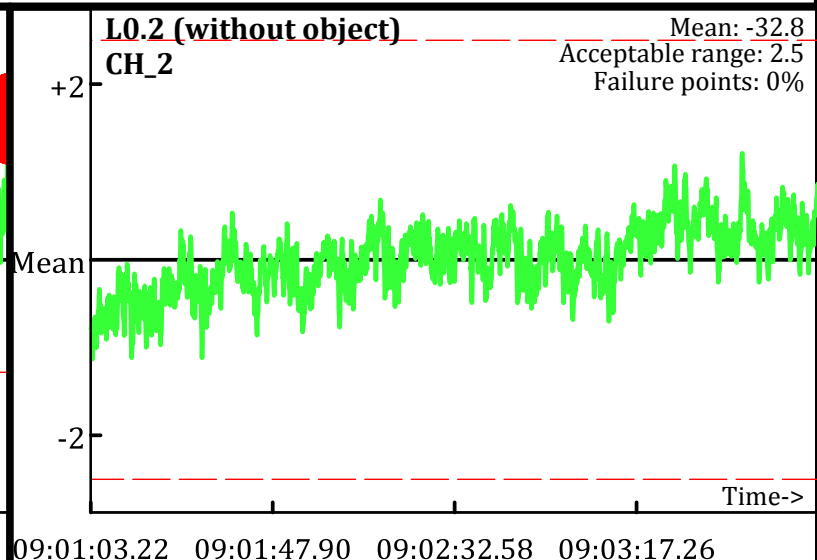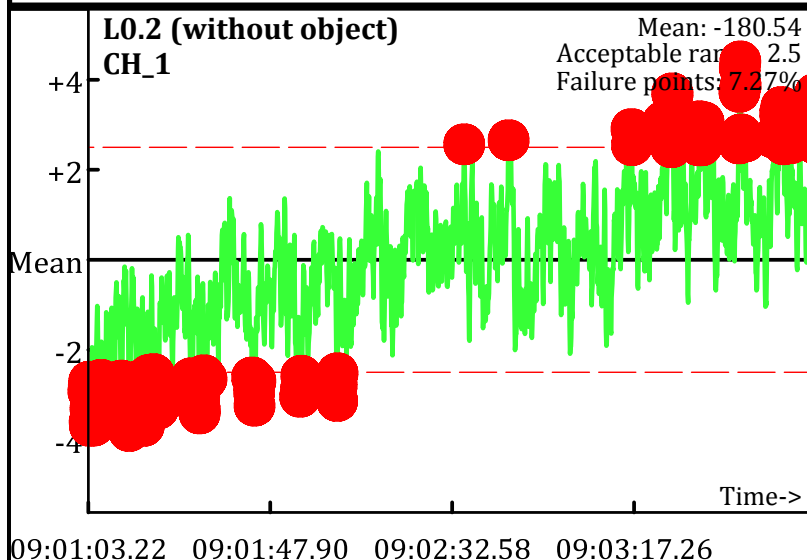Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

AM test
Operator: BG & PAZ
Date: 7/16/2009
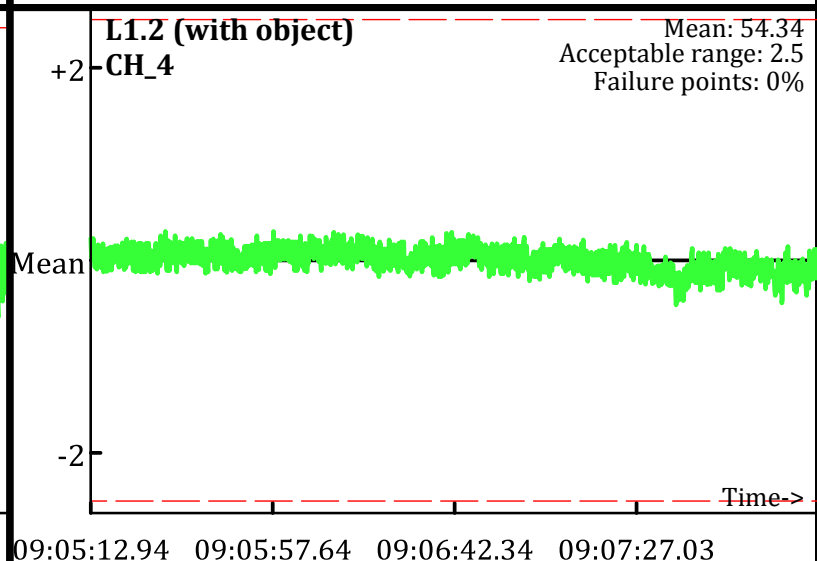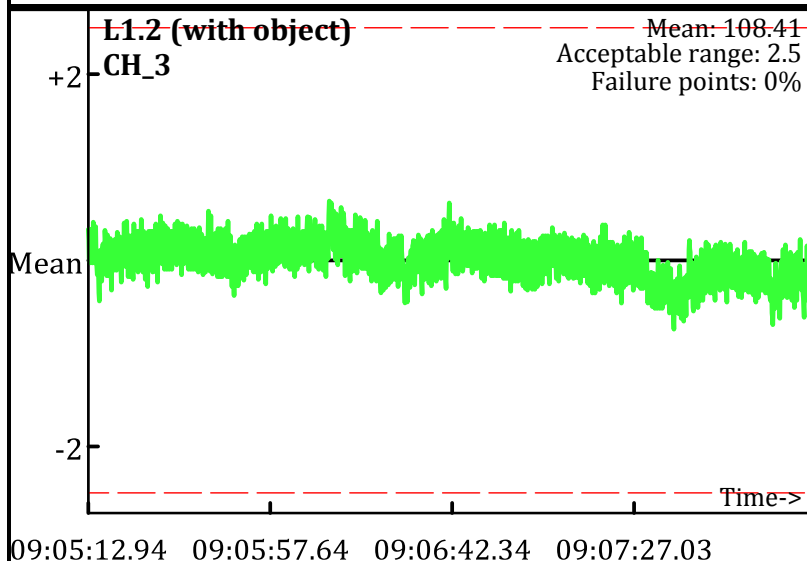
L0.2 (without object)
CH_1
Mean: -180.54
Acceptable range: 2.5
Failure points: 7.27%

+4
+2
Mean
-2
-4
Time->

09:01:03.22   09:01:47.90   09:02:32.58   09:03:17.26

L0.2 (without object)
CH_2
Mean: -32.8
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:01:03.22   09:01:47.90   09:02:32.58   09:03:17.26

L1.2 (with object)
CH_1
Mean: 71.08
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:05:12.94   09:05:57.64   09:06:42.34   09:07:27.03

L1.2 (with object)
CH_2
Mean: 146.79
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:05:12.94   09:05:57.64   09:06:42.34   09:07:27.03

L2.2 (without object)
CH_1
Mean: -173.71
Acceptable range: 2.5
Failure points: 0.508%

+4
+2
Mean
-2
-4
Time->

09:09:11.73   09:09:26.46   09:09:41.18   09:09:55.90

L2.2 (without object)
CH_2
Mean: -31.11
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:09:11.73   09:09:26.46   09:09:41.18   09:09:55.90

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
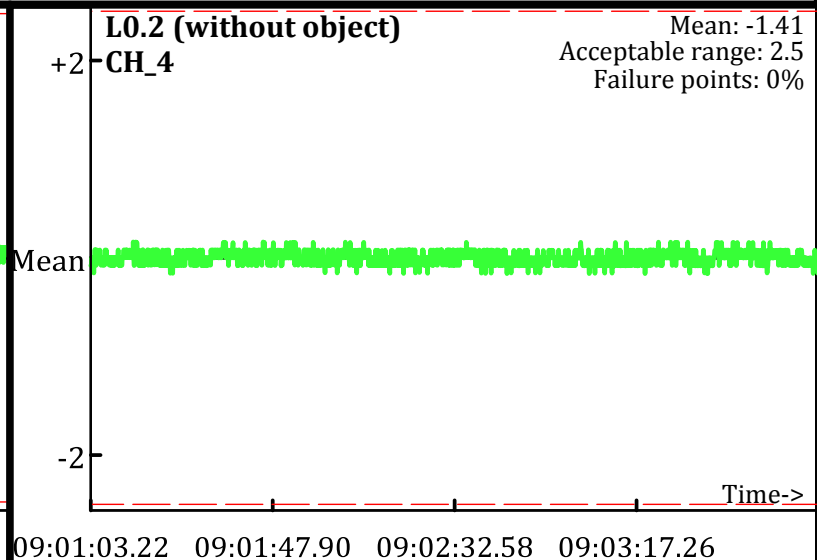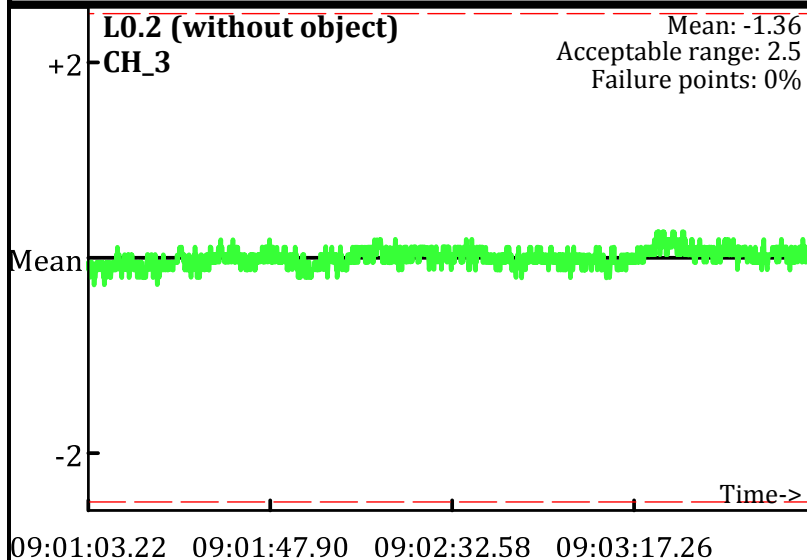Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
--- Acceptable limits
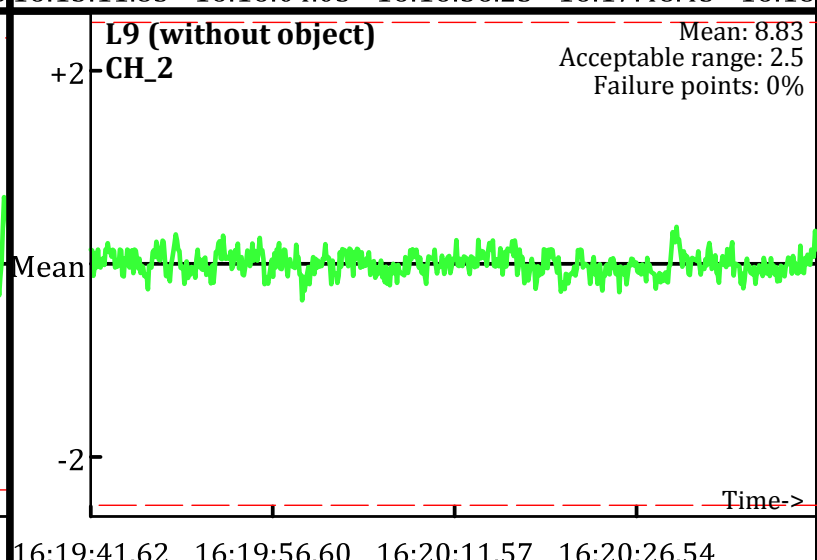
AM test
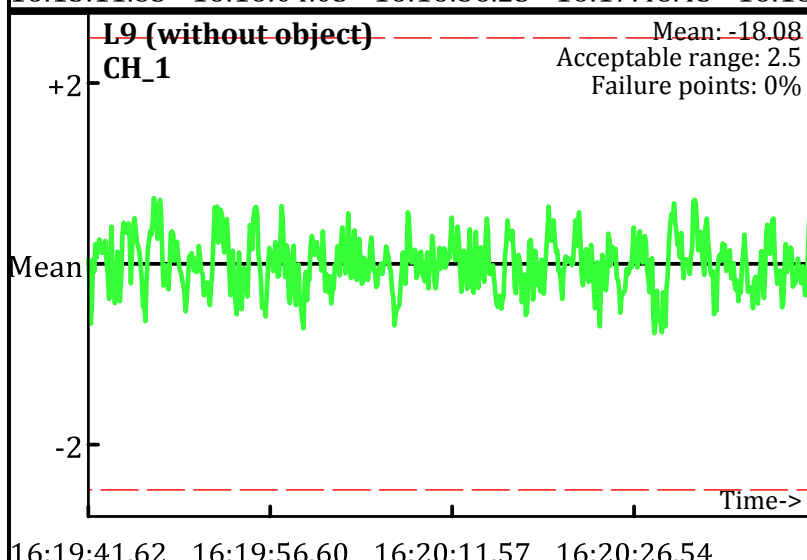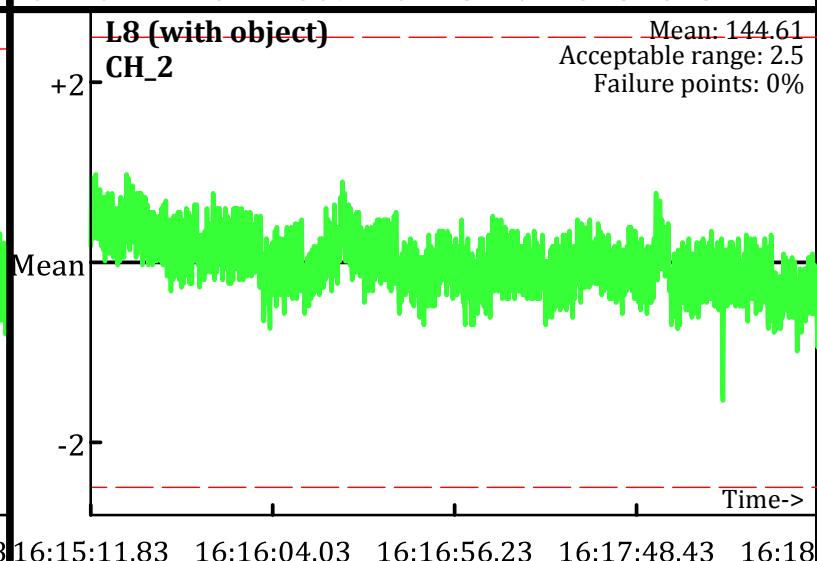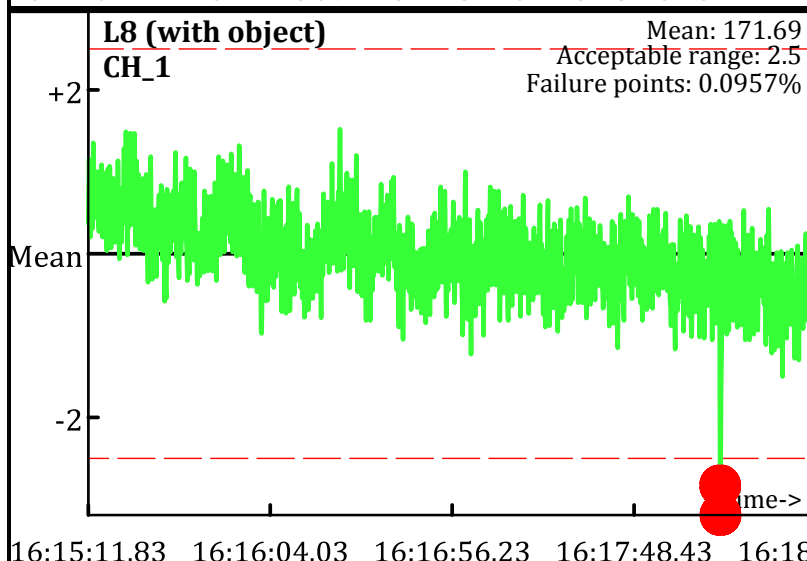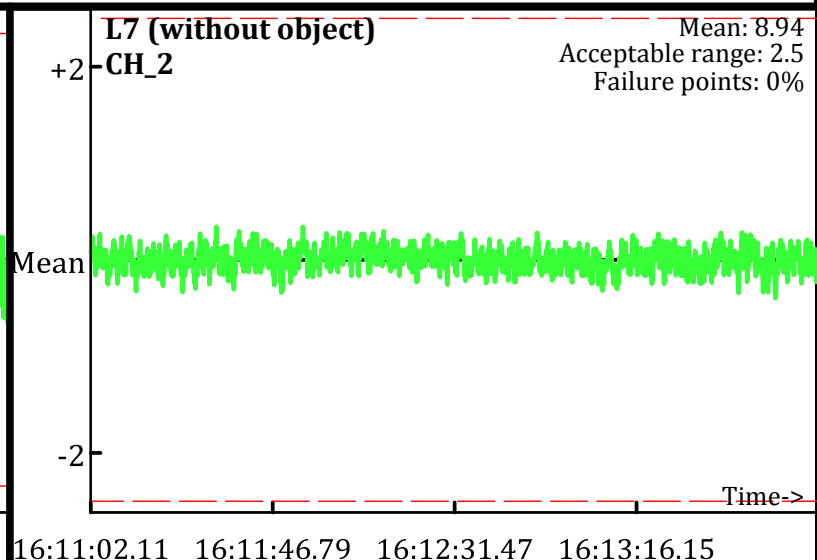Operator: BG & PAZ
Date: 7/16/2009

L0.2 (without object)
CH_3
Mean: -1.36
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_4
Mean: -1.41
Acceptable range: 2.5
Failure points: 0%

09:01:03.22 09:01:47.90 09:02:32.58 09:03:17.26

L1.2 (with object)
CH_3
Mean: 108.41
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_4
Mean: 54.34
Acceptable range: 2.5
Failure points: 0%

09:05:12.94 09:05:57.64 09:06:42.34 09:07:27.03

L2.2 (without object)
CH_3
Mean: -1.1
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_4
Mean: -1.37
Acceptable range: 2.5
Failure points: 0%

09:09:11.73 09:09:26.46 09:09:41.18 09:09:55.90

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
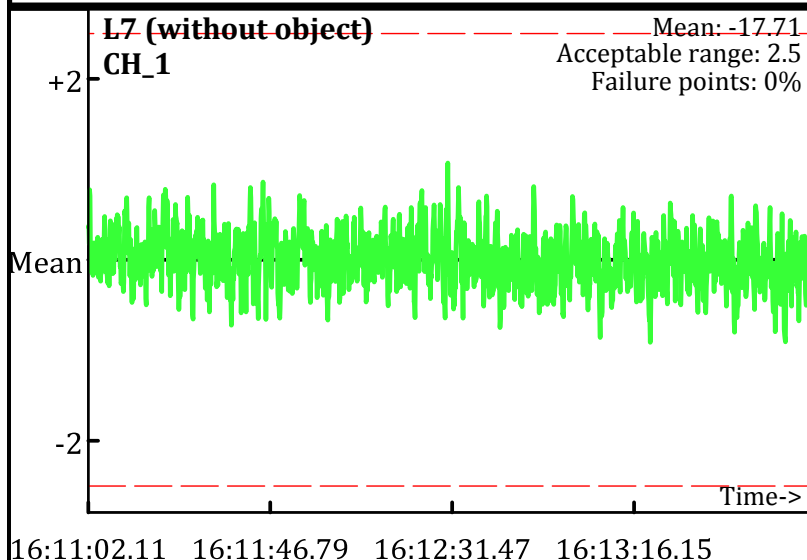Line Name: L0.2 L1.2 L2.2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits
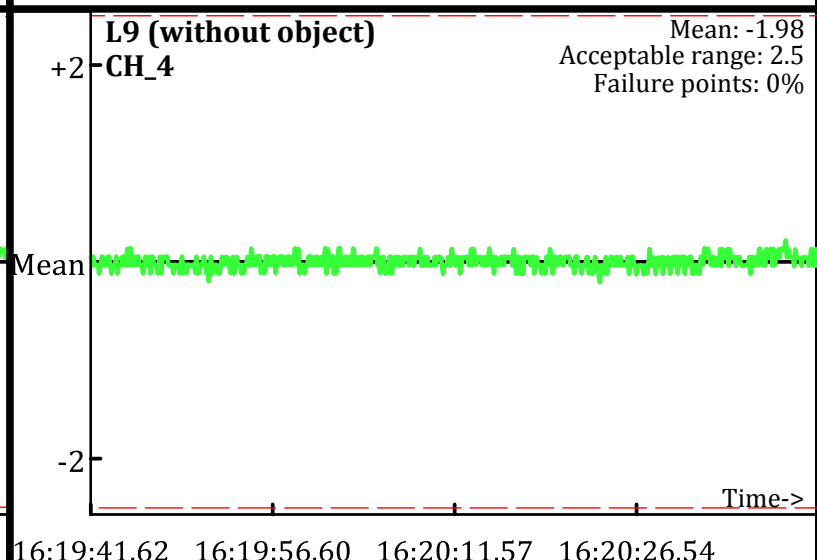
PM test
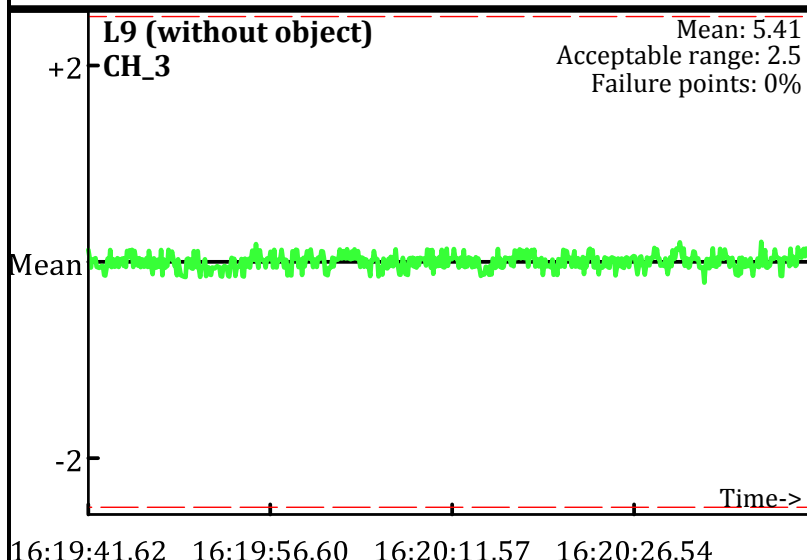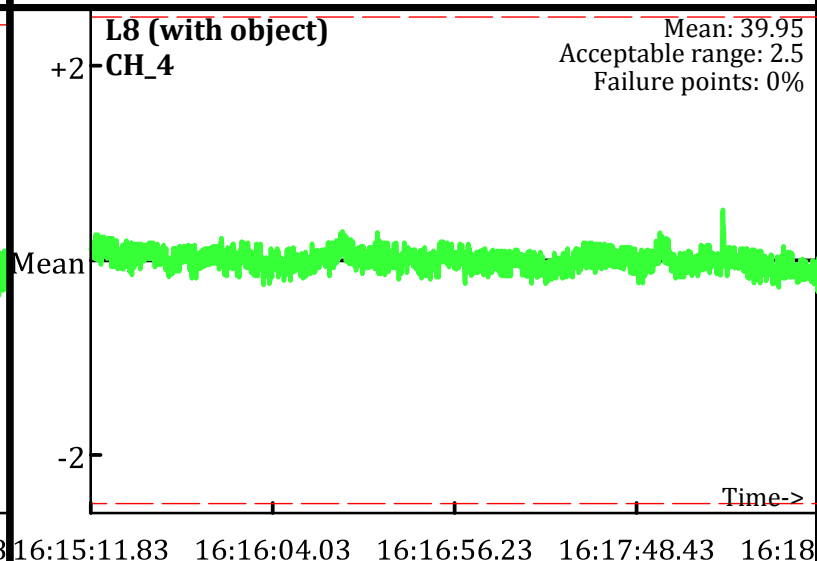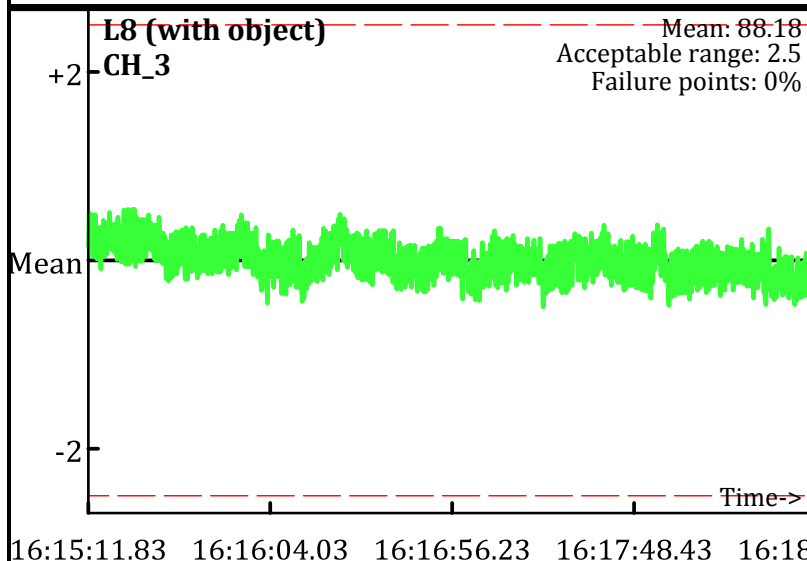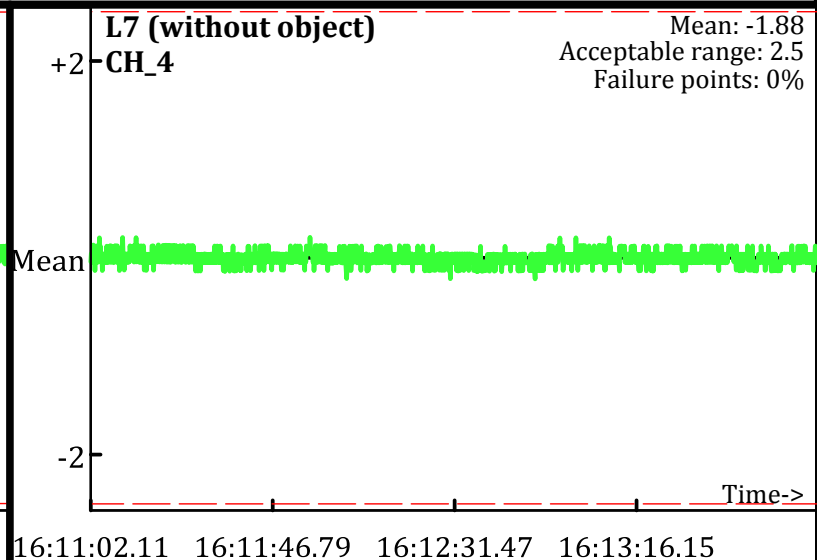Operator: BG & PAZ
Date: 7/16/2009

L7 (without object)
CH_1
Mean: -17.71
Acceptable range: 2.5
Failure points: 0%

16:11:02.11   16:11:46.79   16:12:31.47   16:13:16.15

L7 (without object)
CH_2
Mean: 8.94
Acceptable range: 2.5
Failure points: 0%

16:11:02.11   16:11:46.79   16:12:31.47   16:13:16.15

L8 (with object)
CH_1
Mean: 171.69
Acceptable range: 2.5
Failure points: 0.0957%

16:15:11.83   16:16:04.03   16:16:56.23   16:17:48.43   16:18

L8 (with object)
CH_2
Mean: 144.61
Acceptable range: 2.5
Failure points: 0%

16:15:11.83   16:16:04.03   16:16:56.23   16:17:48.43   16:18

L9 (without object)
CH_1
Mean: -18.08
Acceptable range: 2.5
Failure points: 0%

16:19:41.62   16:19:56.60   16:20:11.57   16:20:26.54

L9 (without object)
CH_2
Mean: 8.83
Acceptable range: 2.5
Failure points: 0%

16:19:41.62   16:19:56.60   16:20:11.57   16:20:26.54

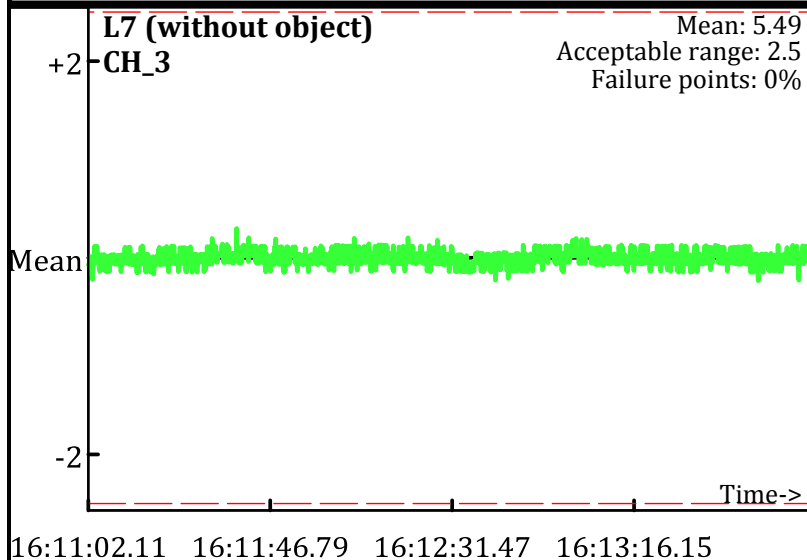Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
Line Name: L7 L8 L9

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/16/2009
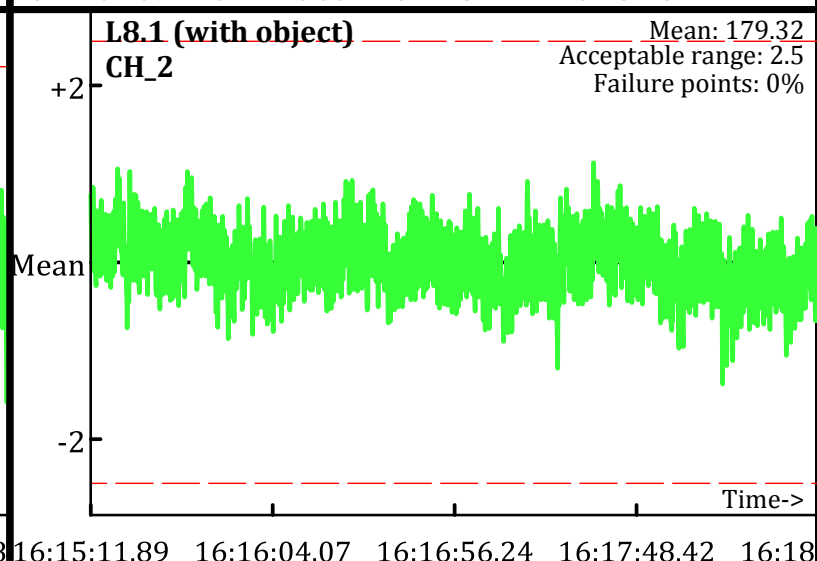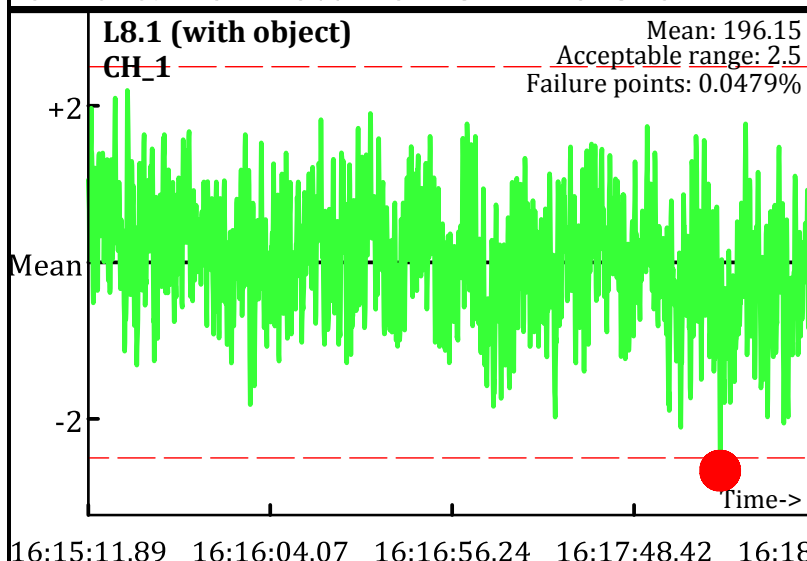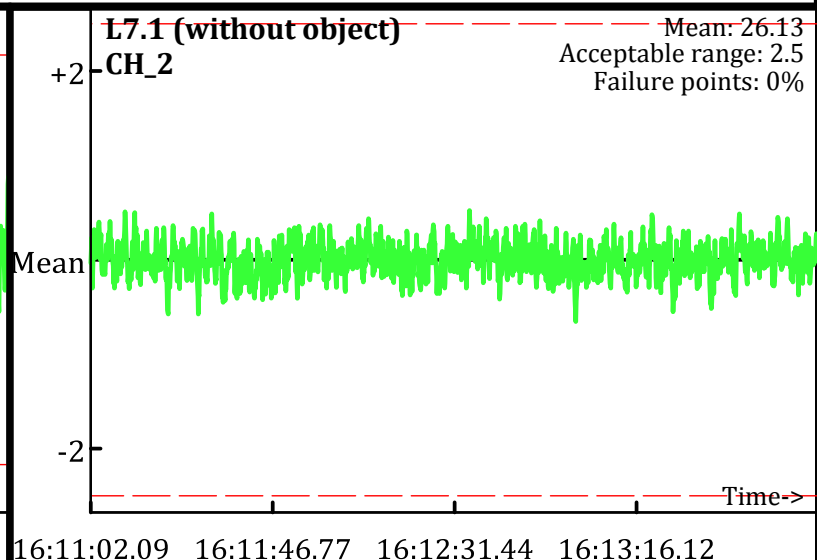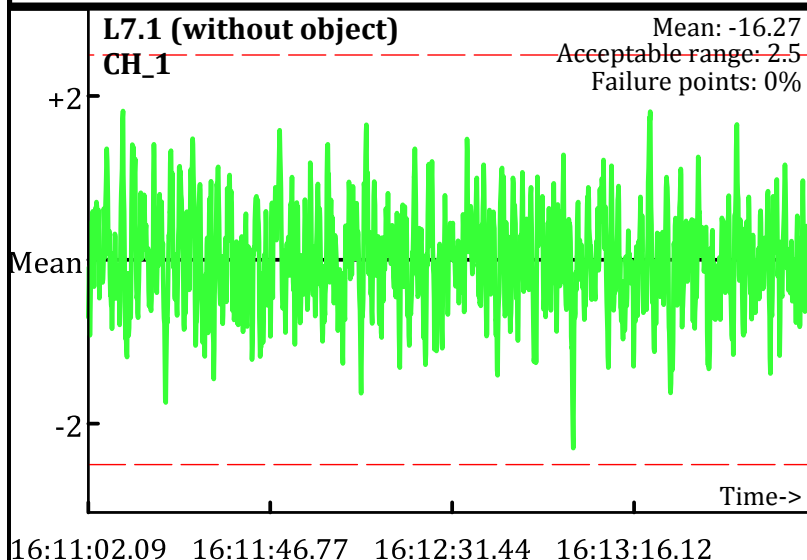
L7 (without object)
CH_3
Mean: 5.49
Acceptable range: 2.5
Failure points: 0%

16:11:02.11   16:11:46.79   16:12:31.47   16:13:16.15

L7 (without object)
CH_4
Mean: -1.88
Acceptable range: 2.5
Failure points: 0%

16:11:02.11   16:11:46.79   16:12:31.47   16:13:16.15

L8 (with object)
CH_3
Mean: 88.18
Acceptable range: 2.5
Failure points: 0%

16:15:11.83   16:16:04.03   16:16:56.23   16:17:48.43   16:18

L8 (with object)
CH_4
Mean: 39.95
Acceptable range: 2.5
Failure points: 0%

16:15:11.83   16:16:04.03   16:16:56.23   16:17:48.43   16:18

L9 (without object)
CH_3
Mean: 5.41
Acceptable range: 2.5
Failure points: 0%

16:19:41.62   16:19:56.60   16:20:11.57   16:20:26.54

L9 (without object)
CH_4
Mean: -1.98
Acceptable range: 2.5
Failure points: 0%

16:19:41.62   16:19:56.60   16:20:11.57   16:20:26.54

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
Line Name: L7 L8 L9

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/16/2009
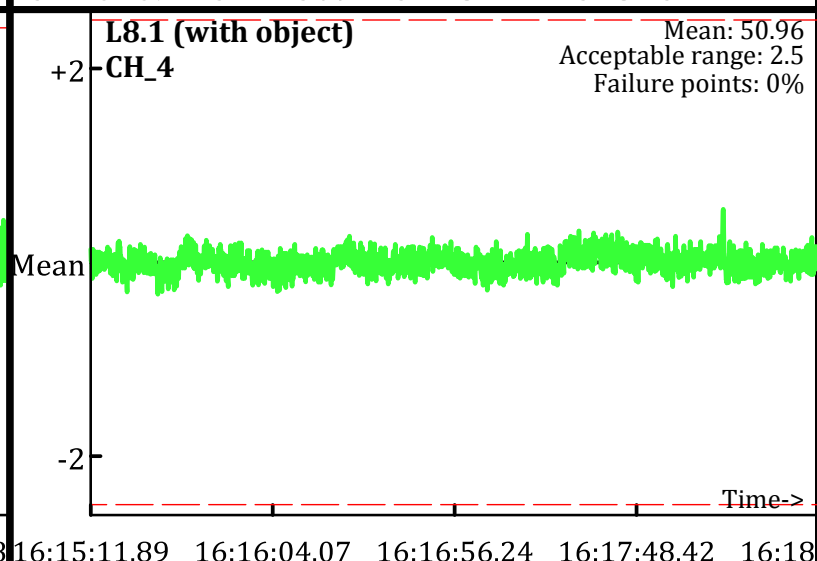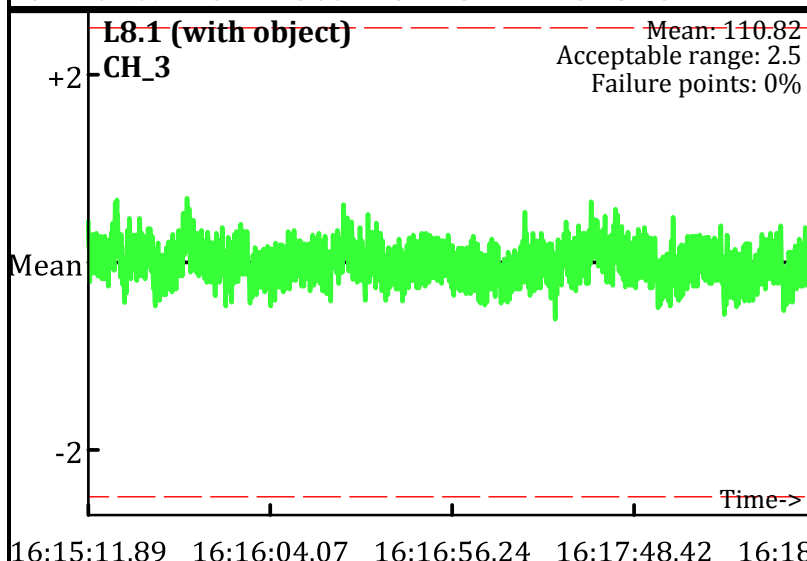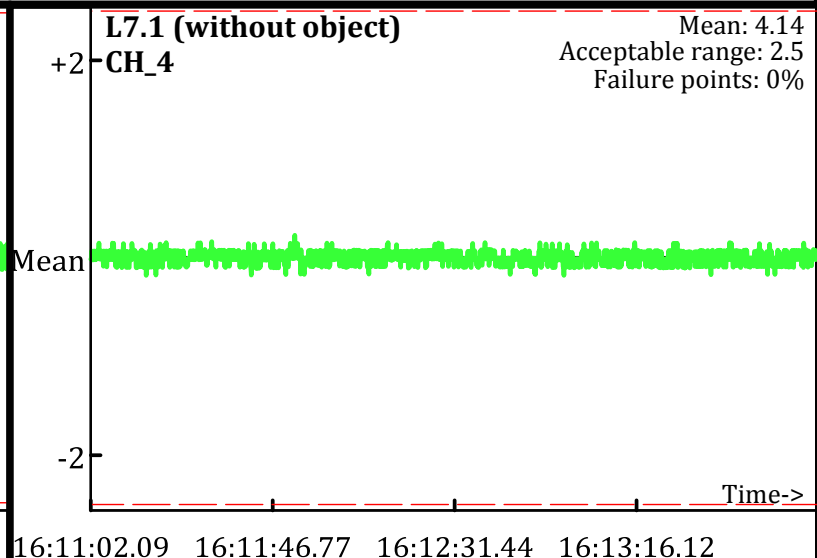

L7.1 (without object)
CH_1
Mean: -16.27
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_2
Mean: 26.13
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object)
CH_1
Mean: 196.15
Acceptable range: 2.5
Failure points: 0.0479%

L8.1 (with object)
CH_2
Mean: 179.32
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_1
Mean: -16.62
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_2
Mean: 26.1
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
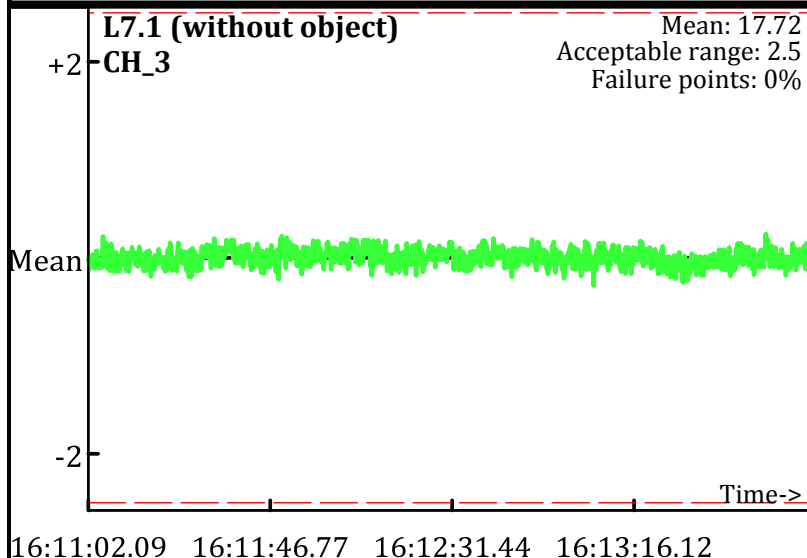Line Name: L7.1 L8.1 L9.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
--- Acceptable limits

PM test
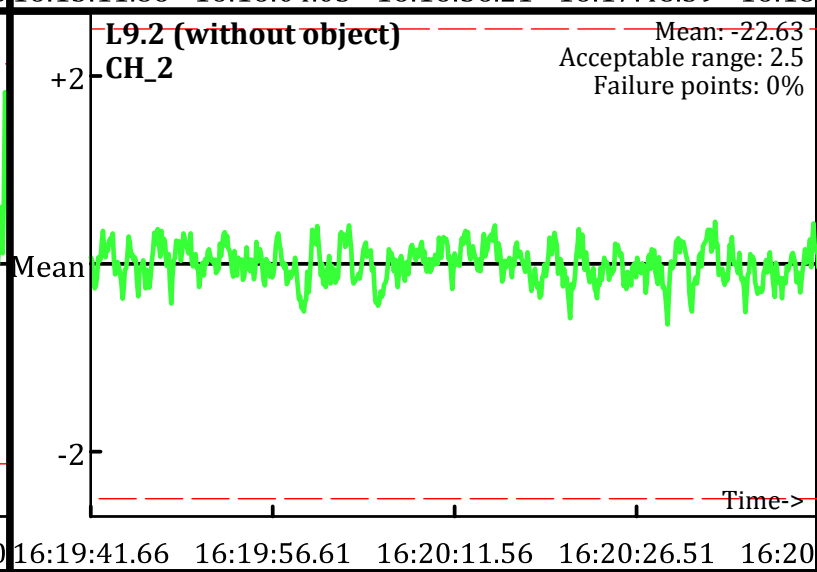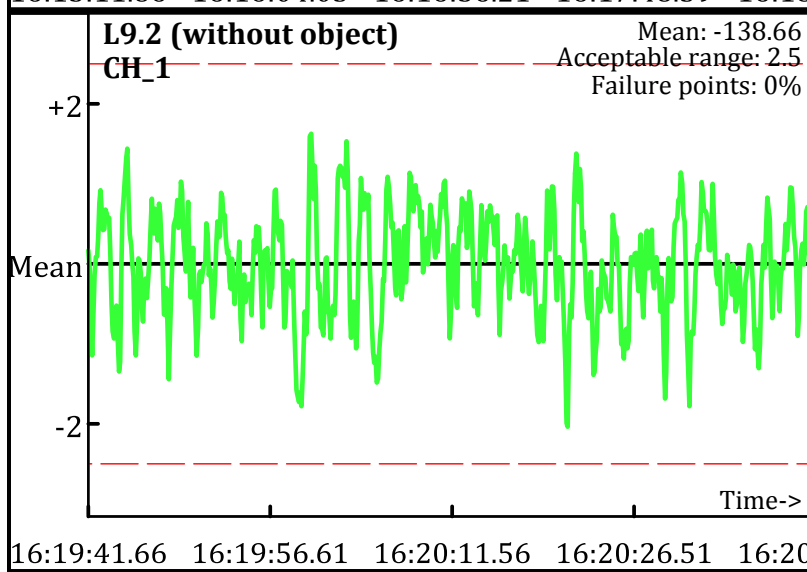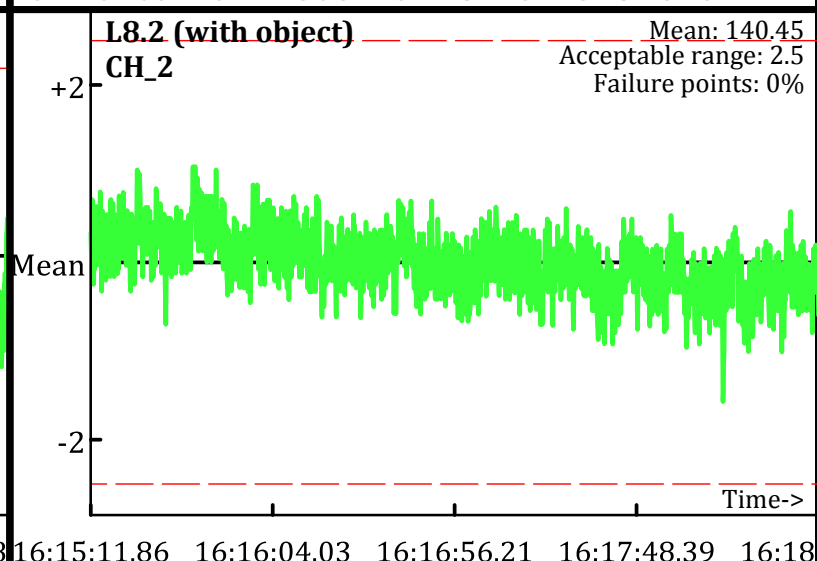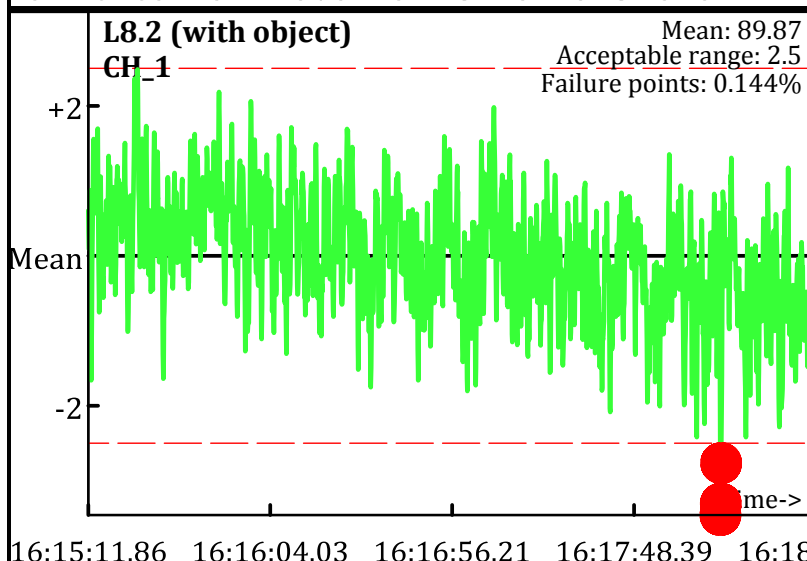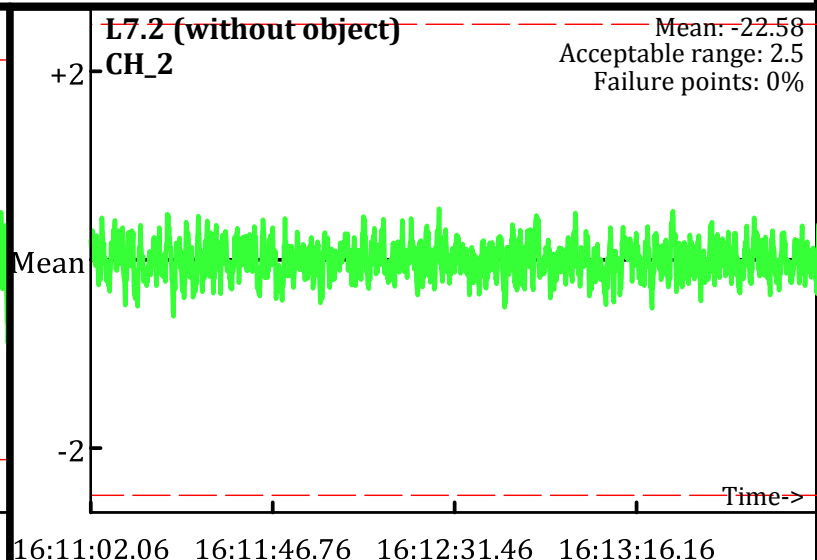Operator: BG & PAZ
Date: 7/16/2009

L7.1 (without object)
CH_3
Mean: 17.72
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:11:02.09   16:11:46.77   16:12:31.44   16:13:16.12

L7.1 (without object)
CH_4
Mean: 4.14
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:11:02.09   16:11:46.77   16:12:31.44   16:13:16.12

L8.1 (with object)
CH_3
Mean: 110.82
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:11.89   16:16:04.07   16:16:56.24   16:17:48.42   16:18

L8.1 (with object)
CH_4
Mean: 50.96
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:11.89   16:16:04.07   16:16:56.24   16:17:48.42   16:18

L9.1 (without object)
CH_3
Mean: 17.76
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:19:41.59   16:19:56.57   16:20:11.55   16:20:26.52   16:20

L9.1 (without object)
CH_4
Mean: 4.12
Acceptable range: 2.5
Failure points: 0%

+2
Mean
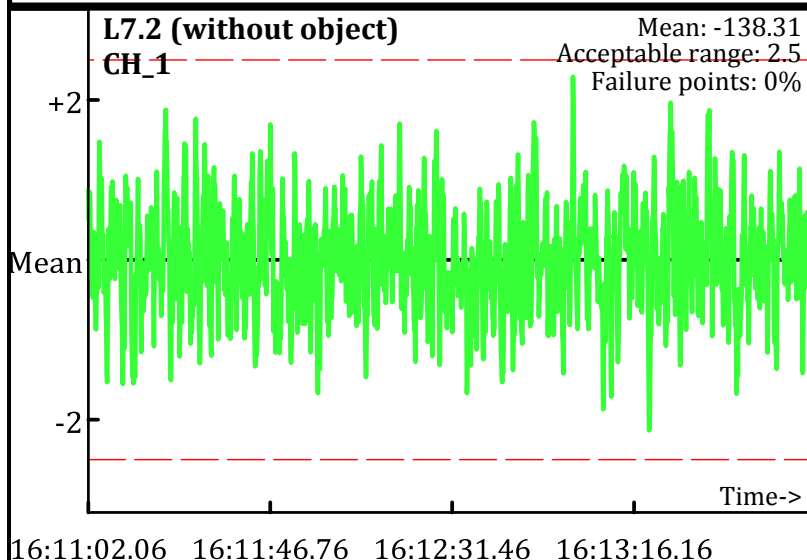-2
Time->

16:19:41.59   16:19:56.57   16:20:11.55   16:20:26.52   16:20

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
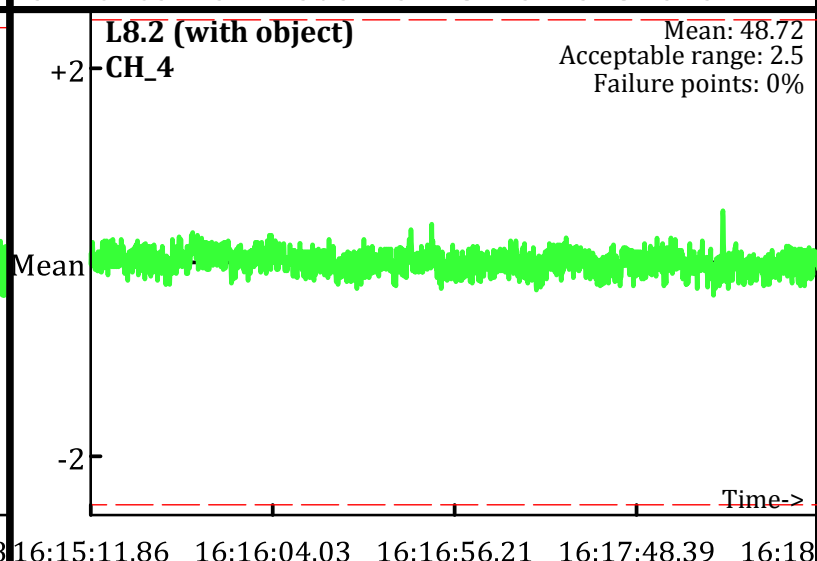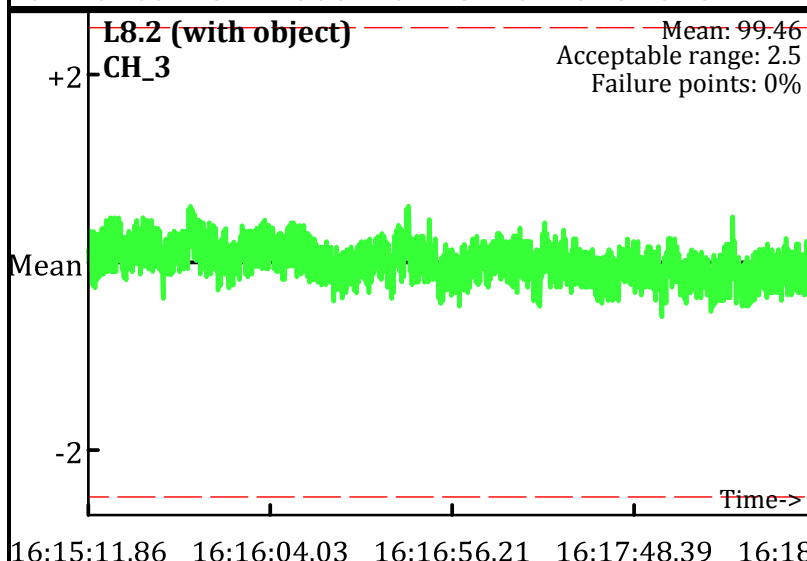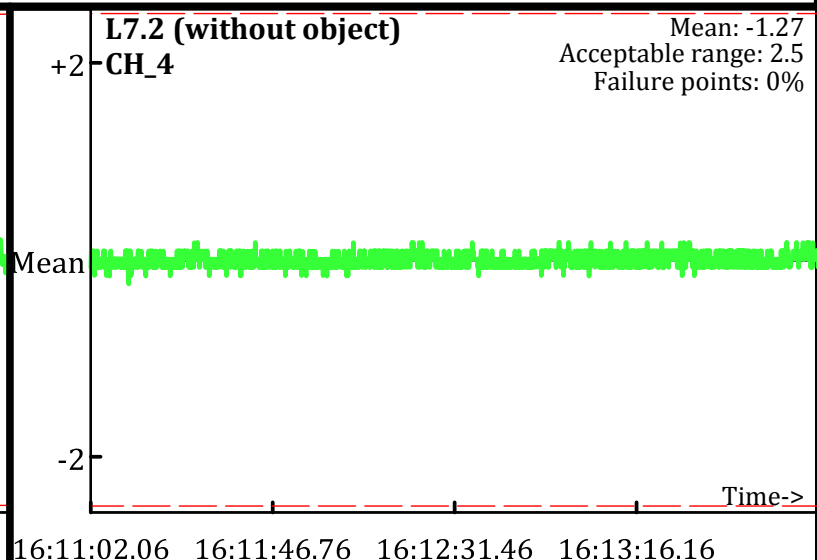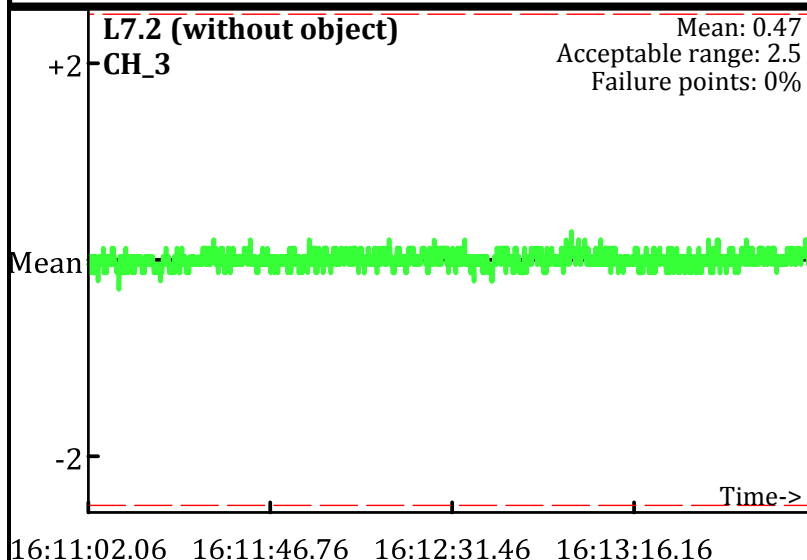Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & PAZ
Date: 7/16/2009

L7.2 (without object)
CH_1
Mean: -138.31
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:11:02.06   16:11:46.76   16:12:31.46   16:13:16.16

L7.2 (without object)
CH_2
Mean: -22.58
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:11:02.06   16:11:46.76   16:12:31.46   16:13:16.16

L8.2 (with object)
CH_1
Mean: 89.87
Acceptable range: 2.5
Failure points: 0.144%

+2
Mean
-2
Time->

16:15:11.86   16:16:04.03   16:16:56.21   16:17:48.39   16:18

L8.2 (with object)
CH_2
Mean: 140.45
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:11.86   16:16:04.03   16:16:56.21   16:17:48.39   16:18

L9.2 (without object)
CH_1
Mean: -138.66
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:19:41.66   16:19:56.61   16:20:11.56   16:20:26.51   16:20

L9.2 (without object)
CH_2
Mean: -22.63
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:19:41.66   16:19:56.61   16:20:11.56   16:20:26.51   16:20

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
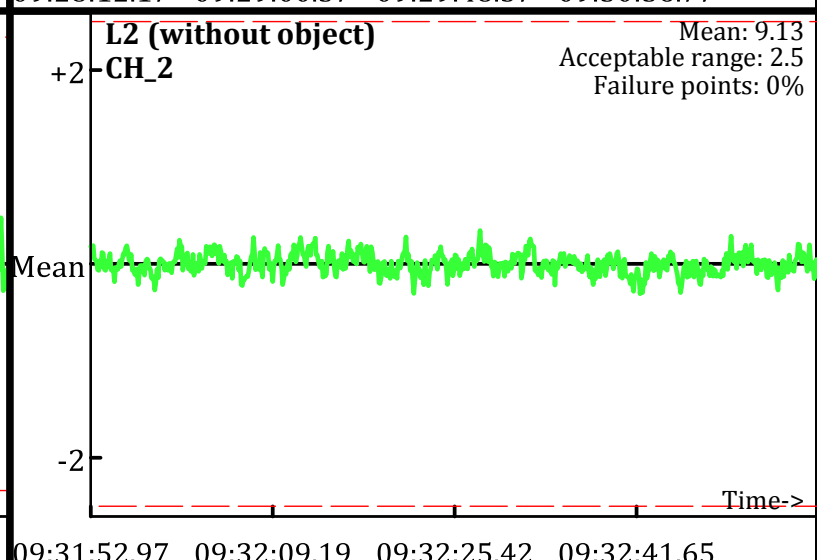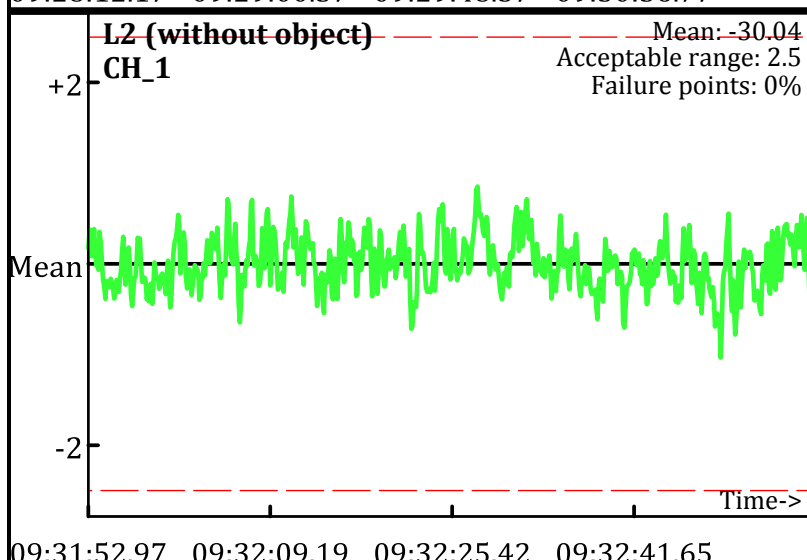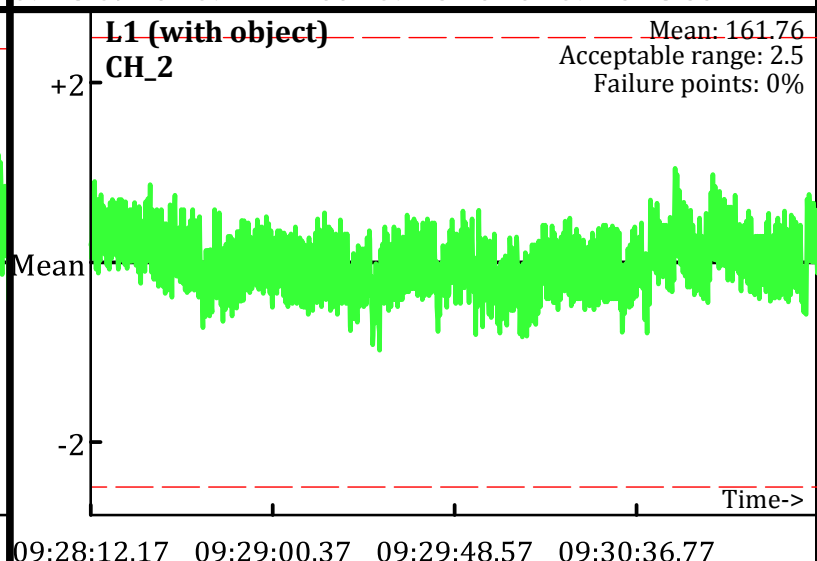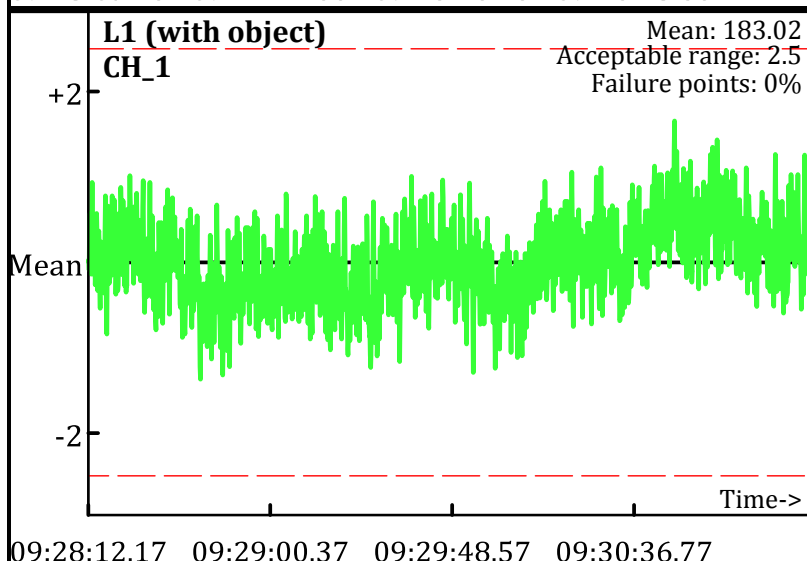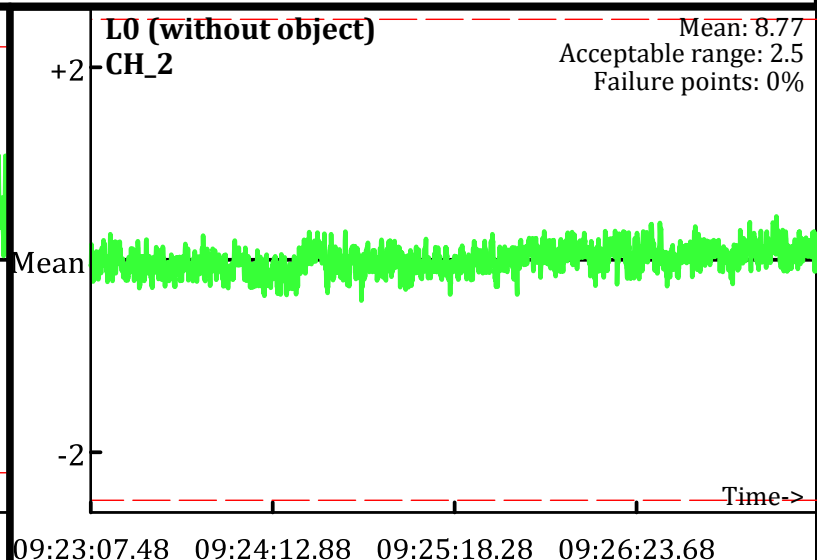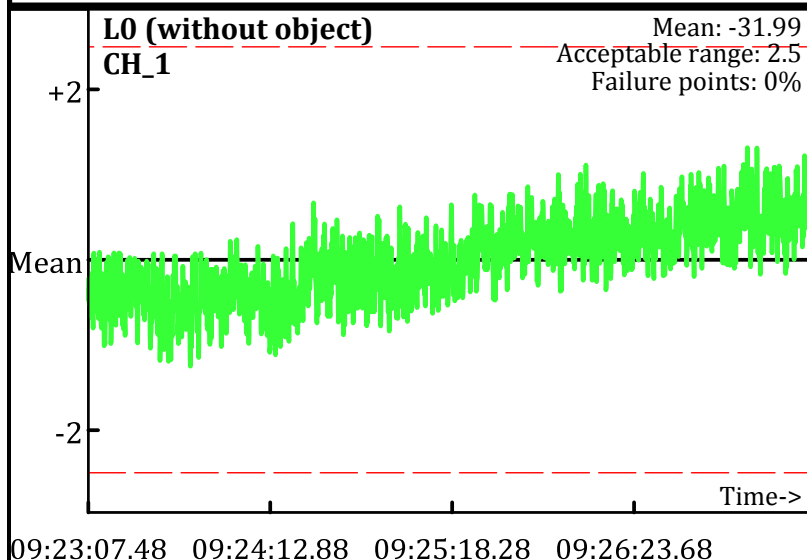Operator: BG & PAZ
Date: 7/16/2009

L7.2 (without object)
CH_3
Mean: 0.47
Acceptable range: 2.5
Failure points: 0%

16:11:02.06   16:11:46.76   16:12:31.46   16:13:16.16

L7.2 (without object)
CH_4
Mean: -1.27
Acceptable range: 2.5
Failure points: 0%

16:11:02.06   16:11:46.76   16:12:31.46   16:13:16.16

L8.2 (with object)
CH_3
Mean: 99.46
Acceptable range: 2.5
Failure points: 0%

16:15:11.86   16:16:04.03   16:16:56.21   16:17:48.39   16:18

L8.2 (with object)
CH_4
Mean: 48.72
Acceptable range: 2.5
Failure points: 0%

16:15:11.86   16:16:04.03   16:16:56.21   16:17:48.39   16:18

L9.2 (without object)
CH_3
Mean: 0.45
Acceptable range: 2.5
Failure points: 0%

16:19:41.66   16:19:56.61   16:20:11.56   16:20:26.51   16:20

L9.2 (without object)
CH_4
Mean: -1.35
Acceptable range: 2.5
Failure points: 0%

16:19:41.66   16:19:56.61   16:20:11.56   16:20:26.51   16:20

Database: C:_QCReports_Ord_Data\071609\QC\071609_TA_QC.gdb
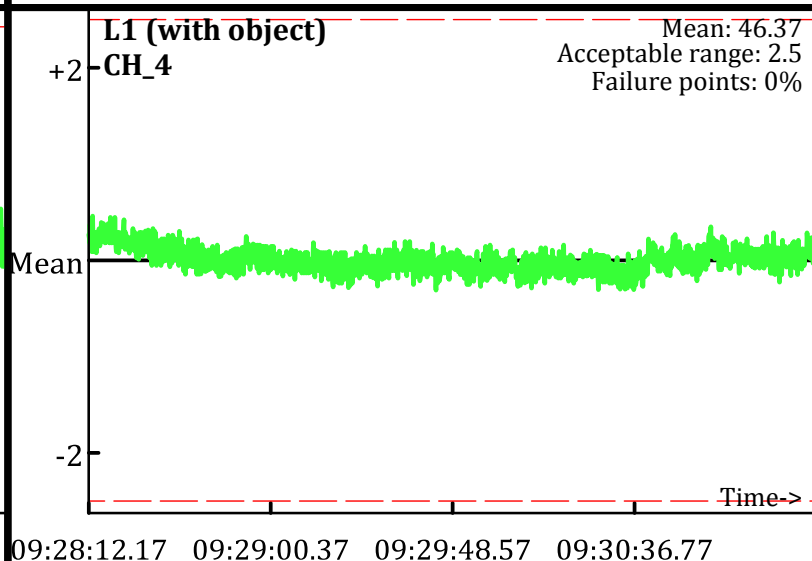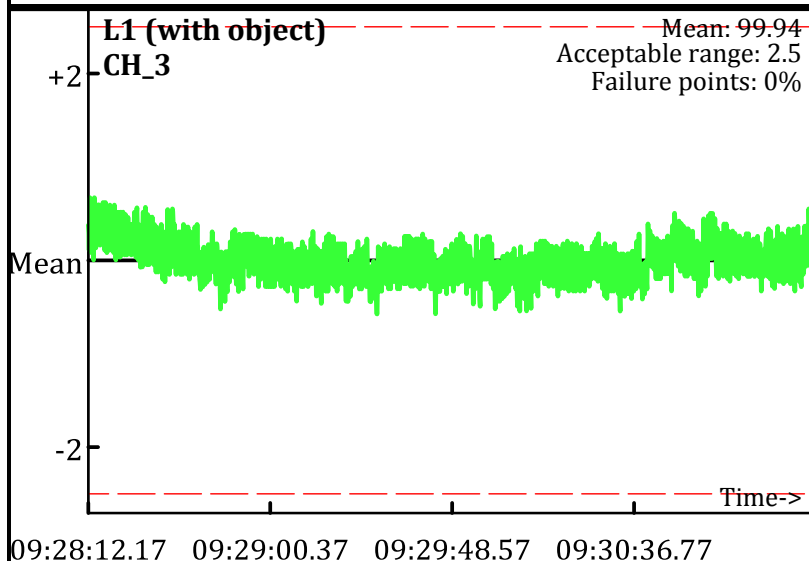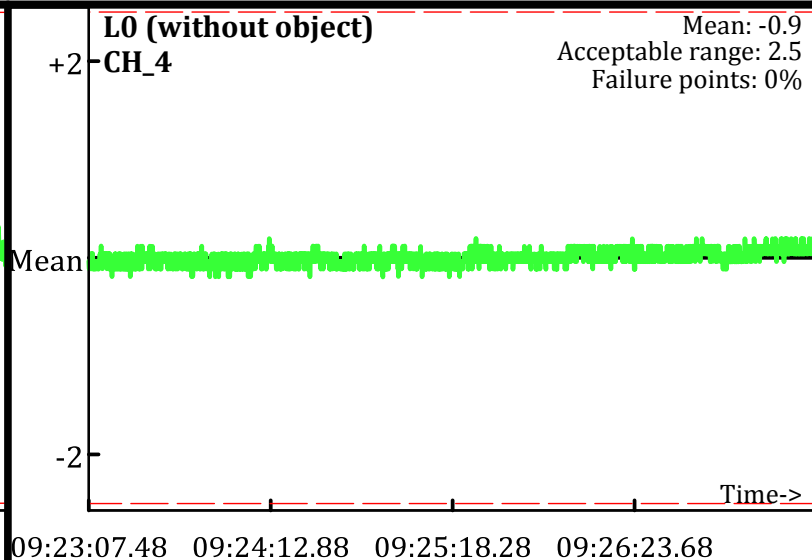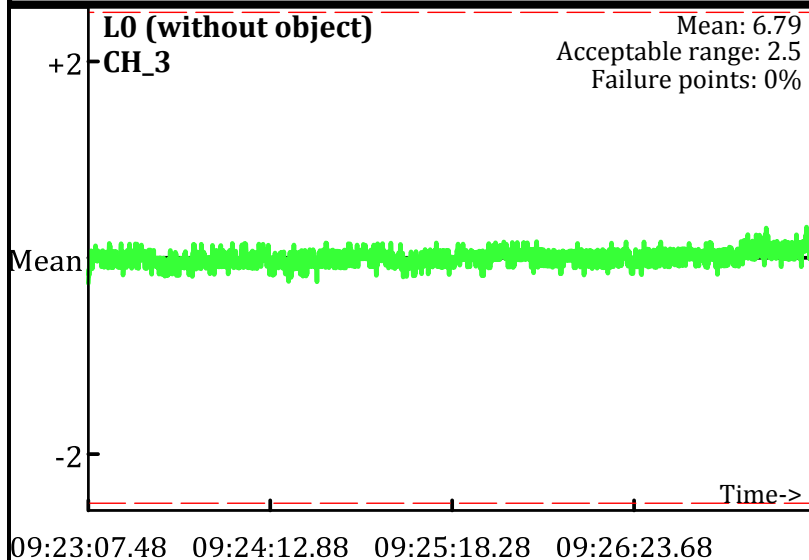Line Name: L7.2 L8.2 L9.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/21/2009

L0 (without object)
CH_1
Mean: -31.99
Acceptable range: 2.5
Failure points: 0%
Time->
09:23:07.48 09:24:12.88 09:25:18.28 09:26:23.68

L0 (without object)
CH_2
Mean: 8.77
Acceptable range: 2.5
Failure points: 0%
Time->
09:23:07.48 09:24:12.88 09:25:18.28 09:26:23.68

L1 (with object)
CH_1
Mean: 183.02
Acceptable range: 2.5
Failure points: 0%
Time->
09:28:12.17 09:29:00.37 09:29:48.57 09:30:36.77

L1 (with object)
CH_2
Mean: 161.76
Acceptable range: 2.5
Failure points: 0%
Time->
09:28:12.17 09:29:00.37 09:29:48.57 09:30:36.77

L2 (without object)
CH_1
Mean: -30.04
Acceptable range: 2.5
Failure points: 0%
Time->
09:31:52.97 09:32:09.19 09:32:25.42 09:32:41.65

L2 (without object)
CH_2
Mean: 9.13
Acceptable range: 2.5
Failure points: 0%
Time->
09:31:52.97 09:32:09.19 09:32:25.42 09:32:41.65

Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
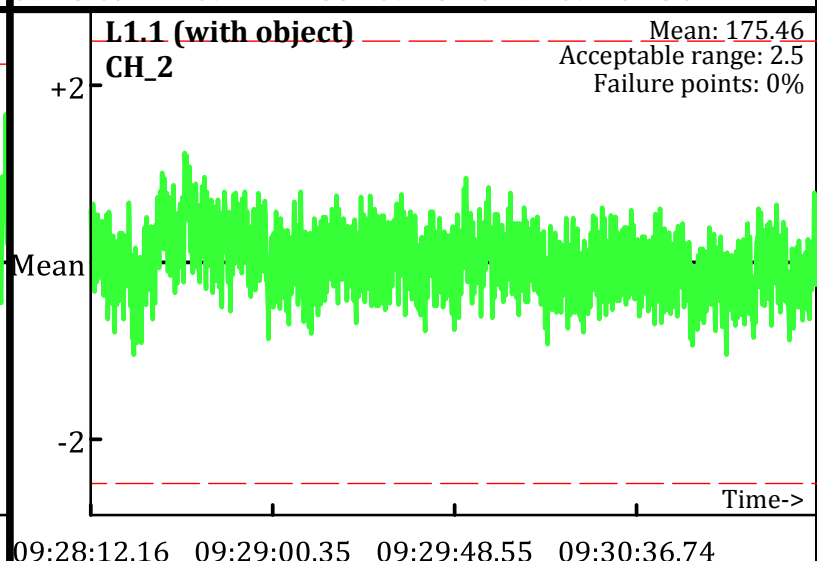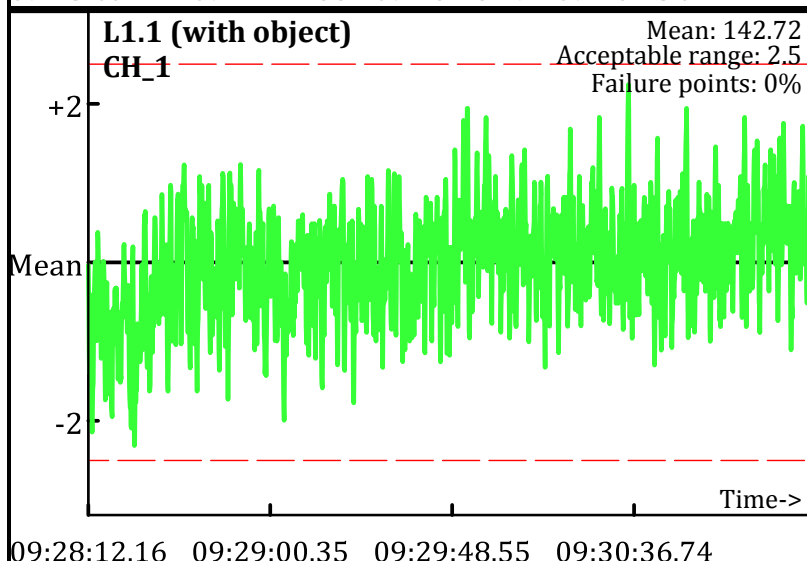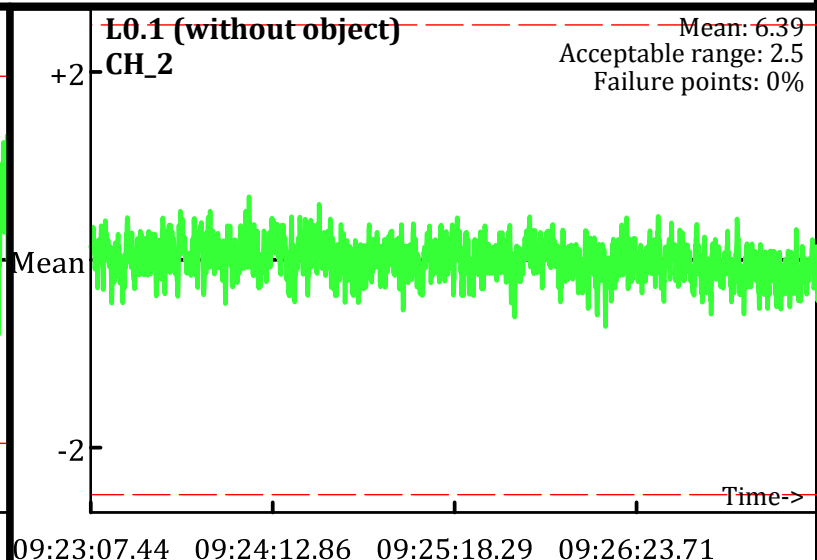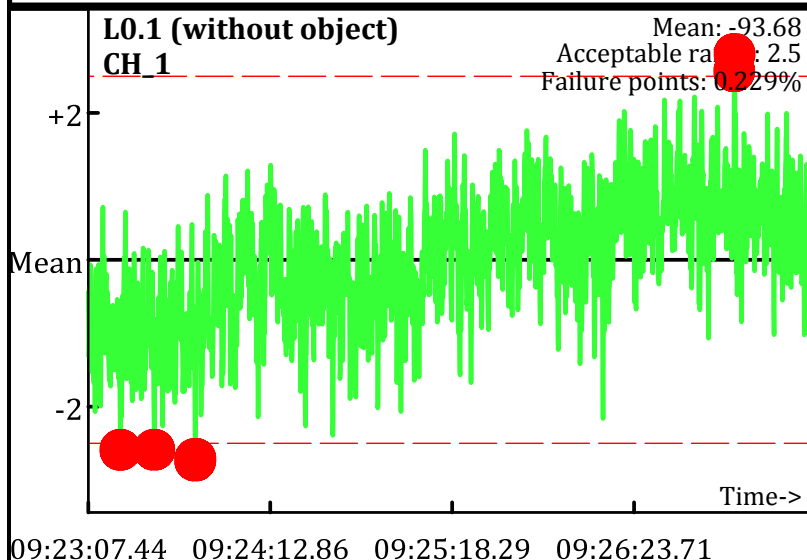Line Name: L0 L1 L2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

L0 (without object)
CH_3
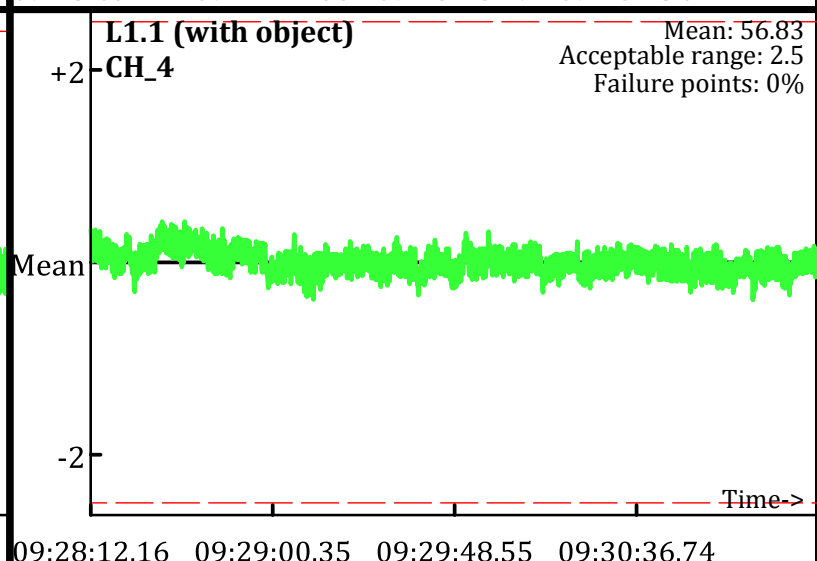Mean: 6.79
Acceptable range: 2.5
Failure points: 0%

09:23:07.48   09:24:12.88   09:25:18.28   09:26:23.68

L0 (without object)
CH_4
Mean: -0.9
Acceptable range: 2.5
Failure points: 0%

09:23:07.48   09:24:12.88   09:25:18.28   09:26:23.68

L1 (with object)
CH_3
Mean: 99.94
Acceptable range: 2.5
Failure points: 0%

09:28:12.17   09:29:00.37   09:29:48.57   09:30:36.77

L1 (with object)
CH_4
Mean: 46.37
Acceptable range: 2.5
Failure points: 0%

09:28:12.17   09:29:00.37   09:29:48.57   09:30:36.77

L2 (without object)
CH_3
Mean: 6.81
Acceptable range: 2.5
Failure points: 0%

09:31:52.97   09:32:09.19   09:32:25.42   09:32:41.65

L2 (without object)
CH_4
Mean: -0.99
Acceptable range: 2.5
Failure points: 0%

09:31:52.97   09:32:09.19   09:32:25.42   09:32:41.65

Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
Line Name: L0 L1 L2

Page: 2

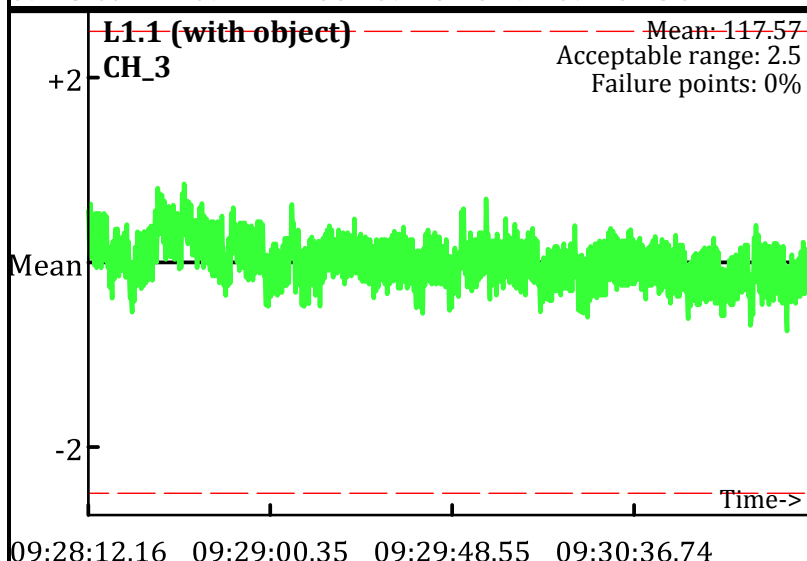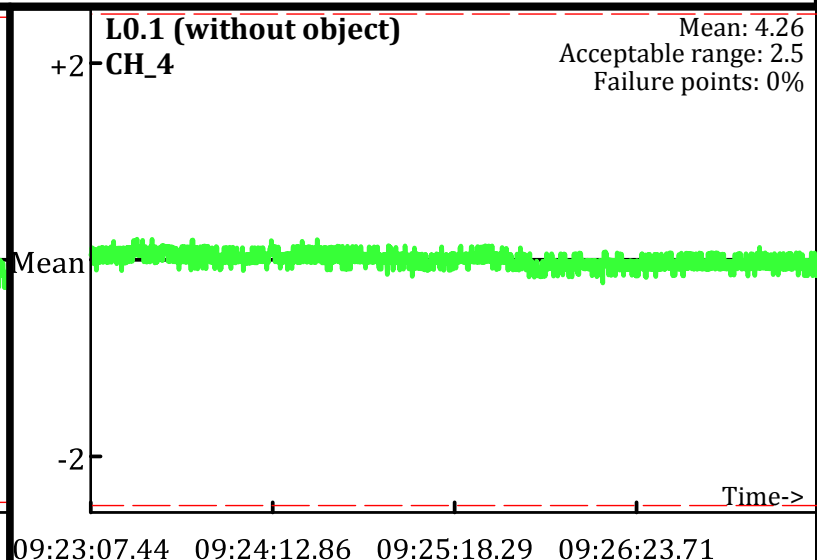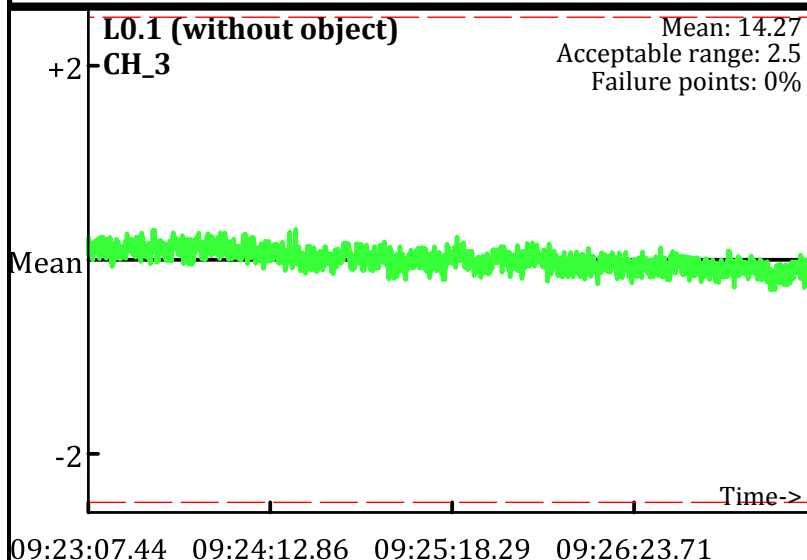# Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
--- Acceptable limits

AM test
Operator: BG & JH
Date: 7/21/2009
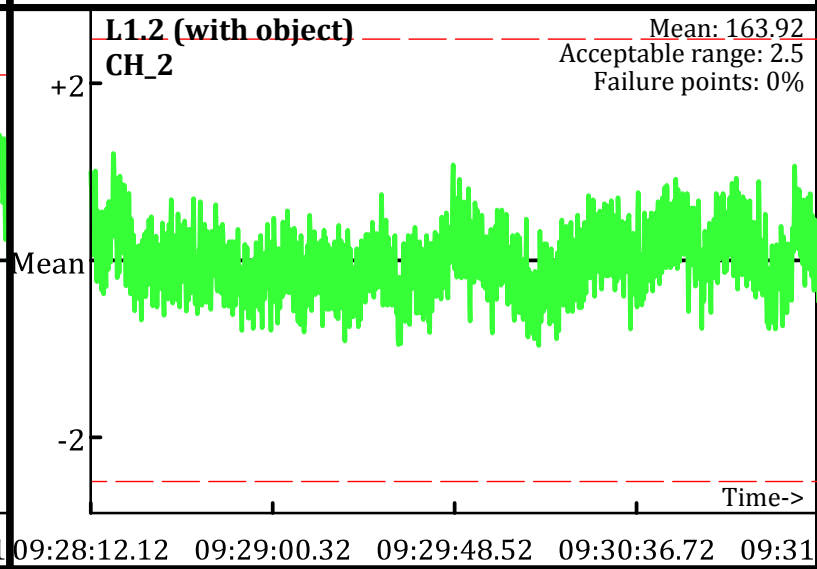
L0.1 (without object)
CH_1
Mean: -93.68
Acceptable range: 2.5
Failure points: 0.229%

L0.1 (without object)
CH_2
Mean: 6.39
Acceptable range: 2.5
Failure points: 0%

09:23:07.44   09:24:12.86   09:25:18.29   09:26:23.71

09:23:07.44   09:24:12.86   09:25:18.29   09:26:23.71

L1.1 (with object)
CH_1
Mean: 142.72
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_2
Mean: 175.46
Acceptable range: 2.5
Failure points: 0%

09:28:12.16   09:29:00.35   09:29:48.55   09:30:36.74

09:28:12.16   09:29:00.35   09:29:48.55   09:30:36.74

L2.1 (without object)
CH_1
Mean: -90
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_2
Mean: 6.61
Acceptable range: 2.5
Failure points: 0%

09:31:52.95   09:32:09.18   09:32:25.40   09:32:41.62

09:31:52.95   09:32:09.18   09:32:25.40   09:32:41.62

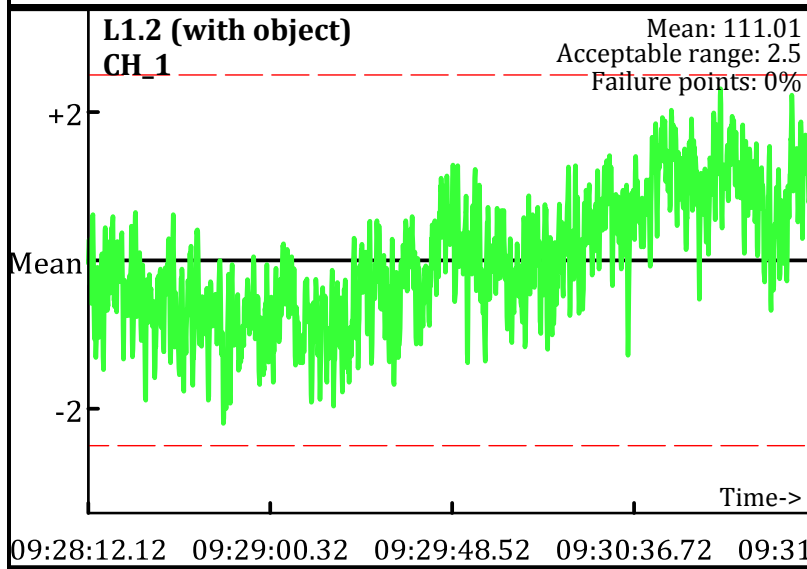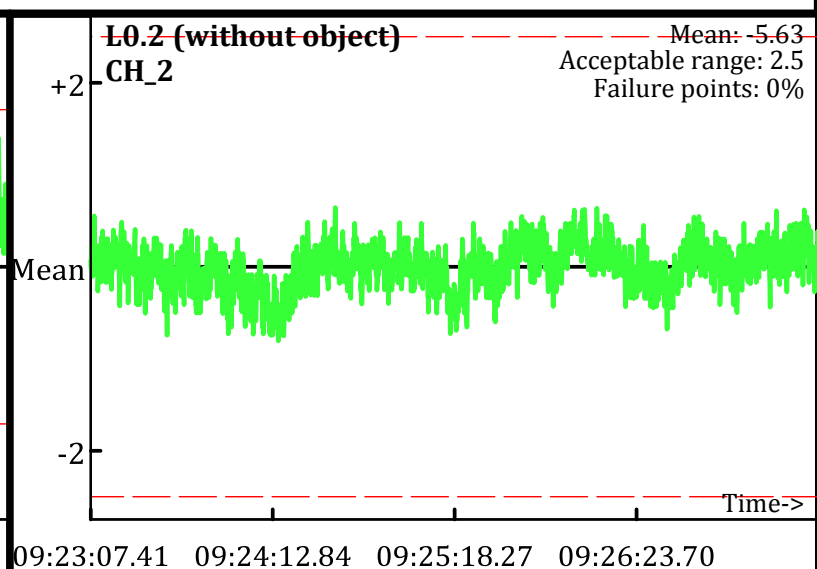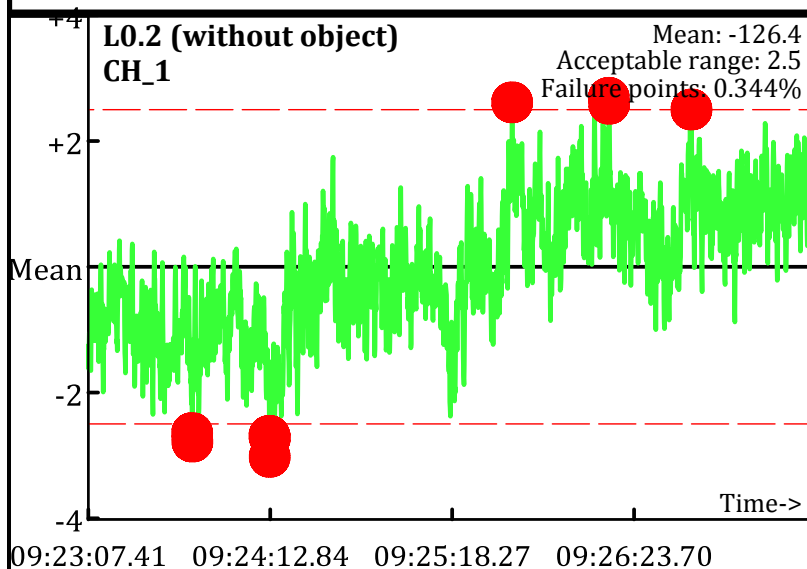Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/21/2009
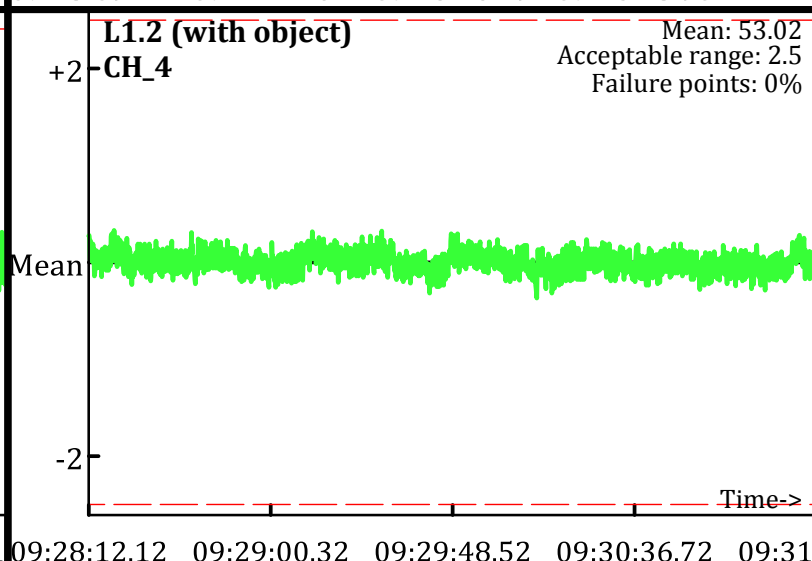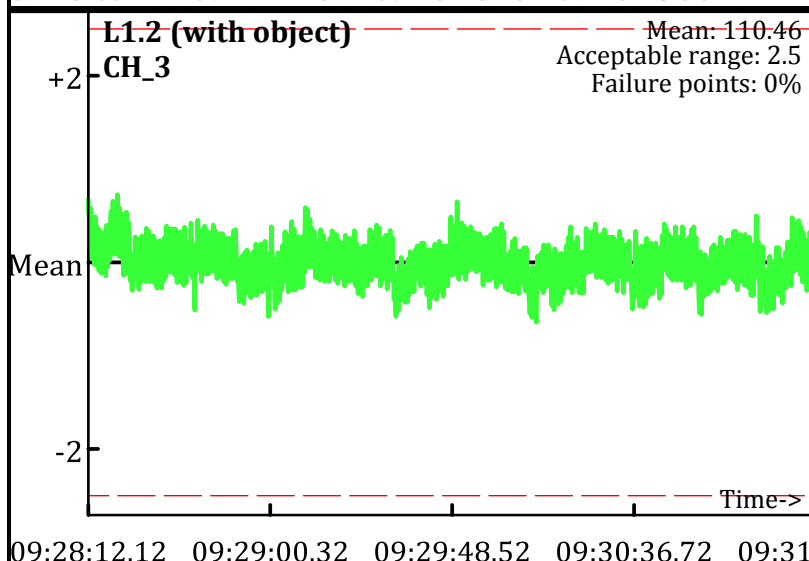
L0.1 (without object)
CH_3
Mean: 14.27
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:23:07.44   09:24:12.86   09:25:18.29   09:26:23.71

L0.1 (without object)
CH_4
Mean: 4.26
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:23:07.44   09:24:12.86   09:25:18.29   09:26:23.71

L1.1 (with object)
CH_3
Mean: 117.57
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:28:12.16   09:29:00.35   09:29:48.55   09:30:36.74

L1.1 (with object)
CH_4
Mean: 56.83
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:28:12.16   09:29:00.35   09:29:48.55   09:30:36.74

L2.1 (without object)
CH_3
Mean: 14.07
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:31:52.95   09:32:09.18   09:32:25.40   09:32:41.62

L2.1 (without object)
CH_4
Mean: 4.16
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:31:52.95   09:32:09.18   09:32:25.40   09:32:41.62

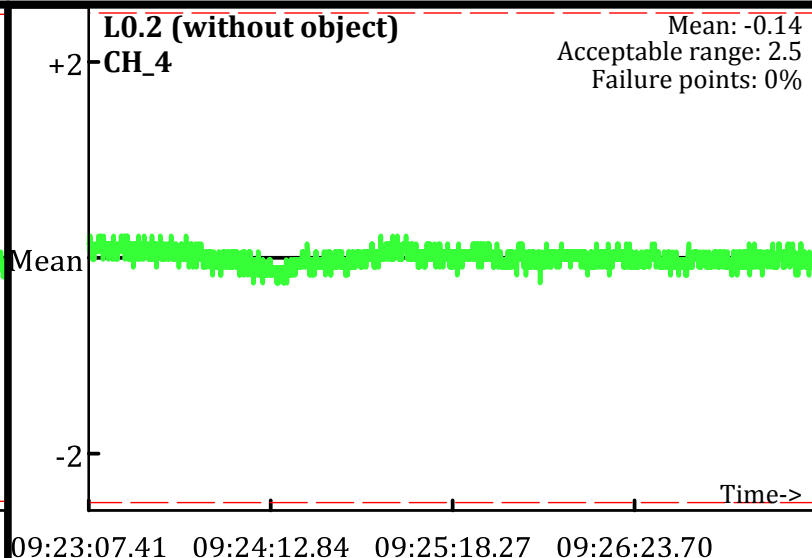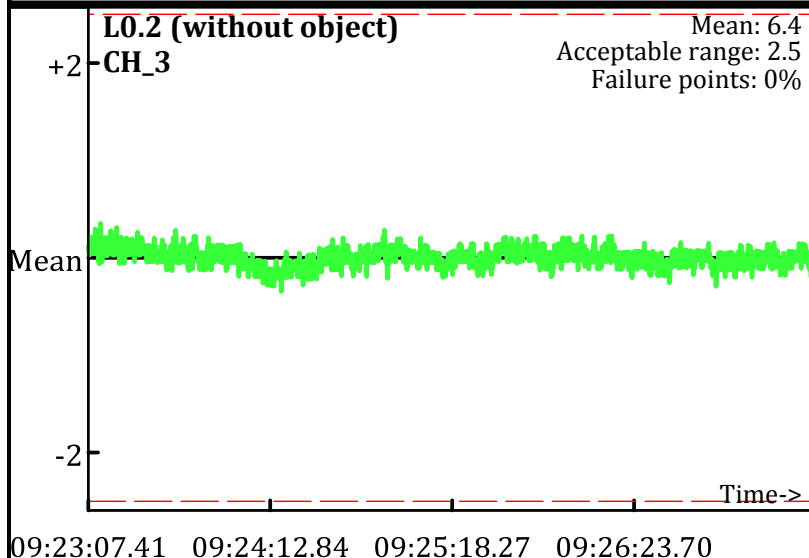Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
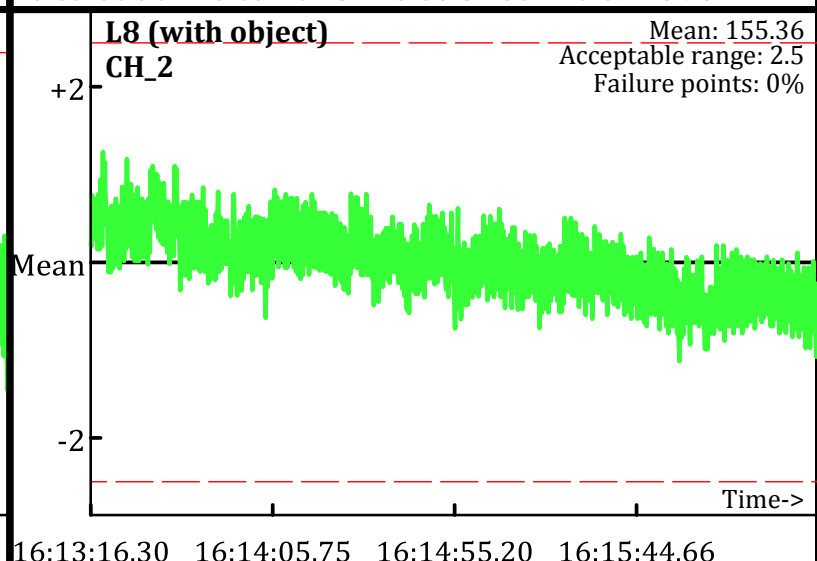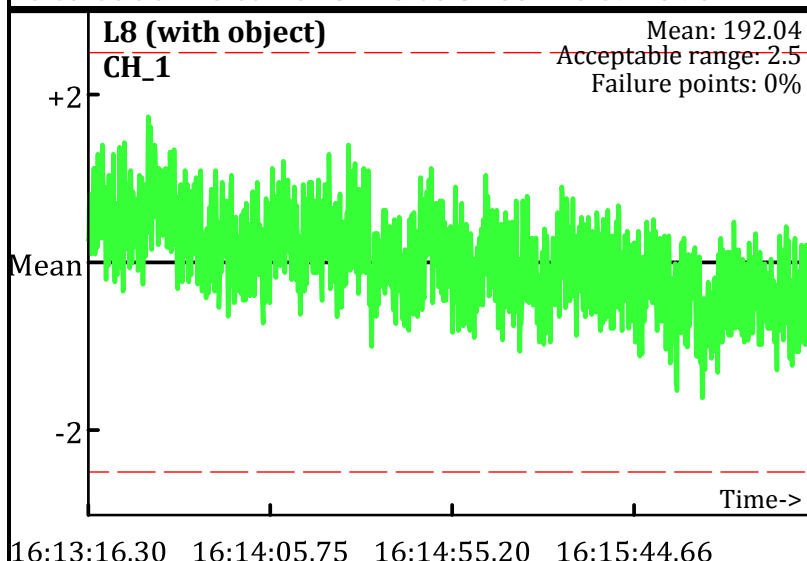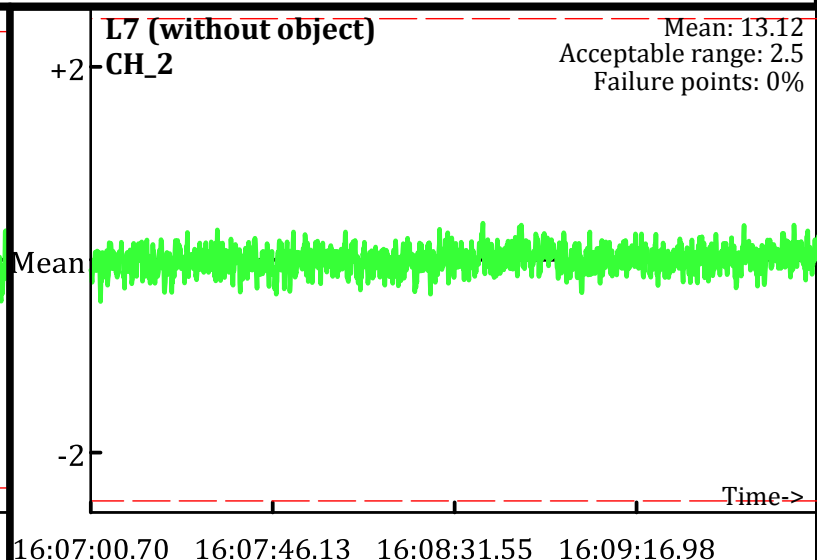Grid/Location: QC Area

● Outside range
- - - Acceptable limits

AM test
Operator: BG & JH
Date: 7/21/2009

L0.2 (without object) CH_1 — Mean: -126.4, Acceptable range: 2.5, Failure points: 0.344%

L0.2 (without object) CH_2 — Mean: -5.63, Acceptable range: 2.5, Failure points: 0%

L1.2 (with object) CH_1 — Mean: 111.01, Acceptable range: 2.5, Failure points: 0%

L1.2 (with object) CH_2 — Mean: 163.92, Acceptable range: 2.5, Failure points: 0%

L2.2 (without object) CH_1 — Mean: -120.9, Acceptable range: 2.5, Failure points: 0%

L2.2 (without object) CH_2 — Mean: -4.61, Acceptable range: 2.5, Failure points: 0%

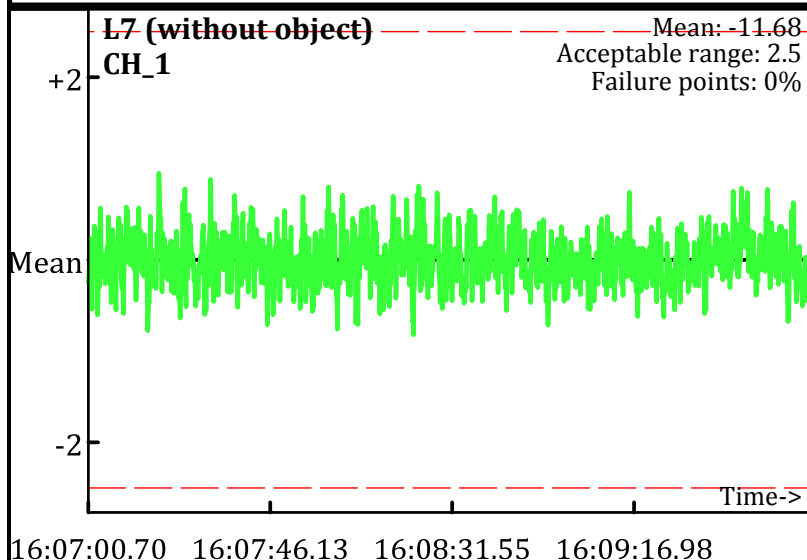Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/21/2009
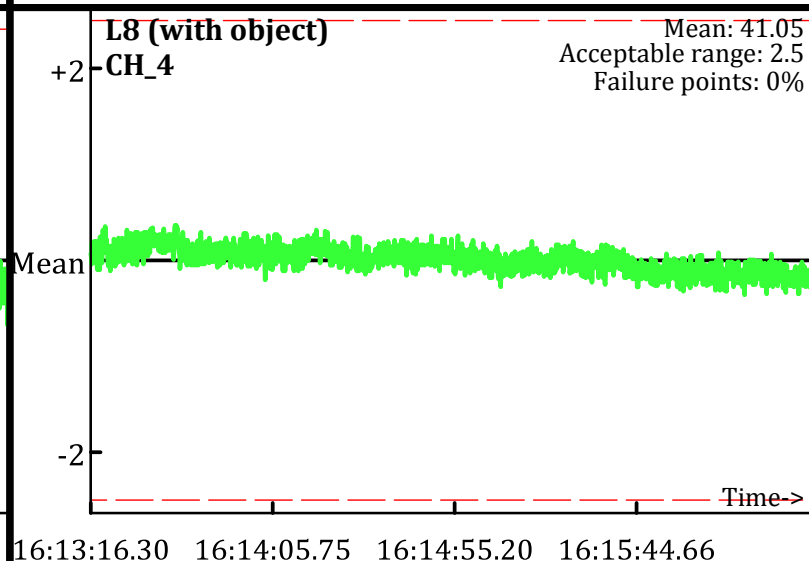

L0.2 (without object)
CH_3
Mean: 6.4
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_4
Mean: -0.14
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_3
Mean: 110.46
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_4
Mean: 53.02
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_3
Mean: 6.49
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_4
Mean: -0.19
Acceptable range: 2.5
Failure points: 0%

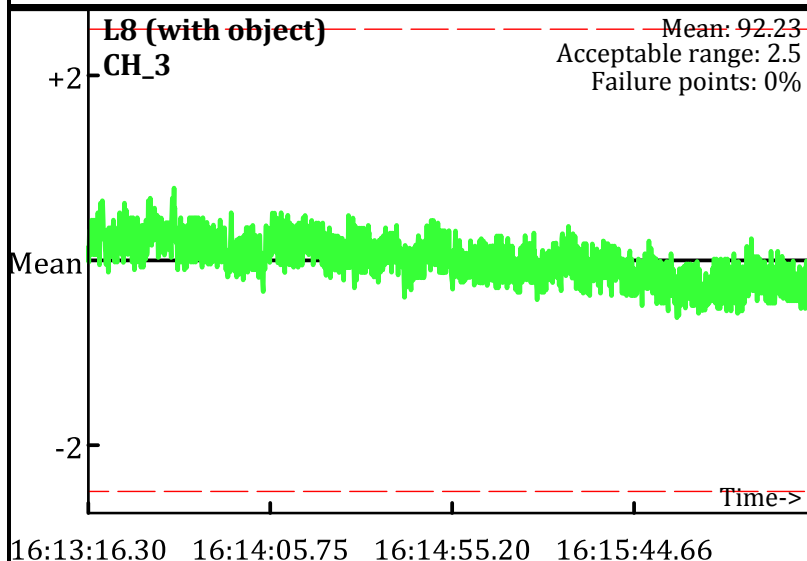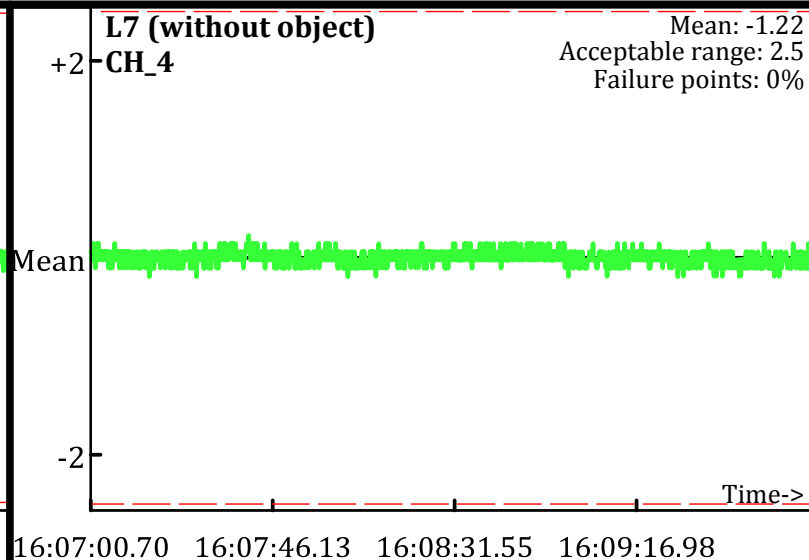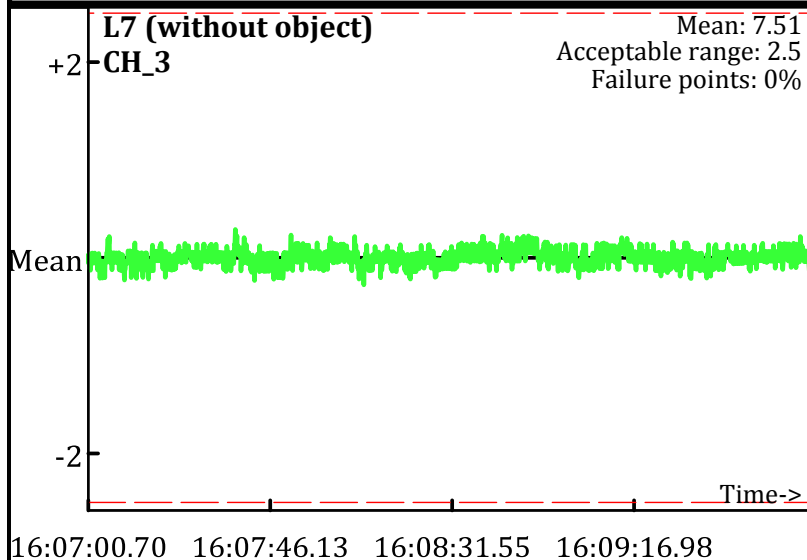Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
— — — Acceptable limits

PM test
Operator: BG & JH
Date: 7/21/2009
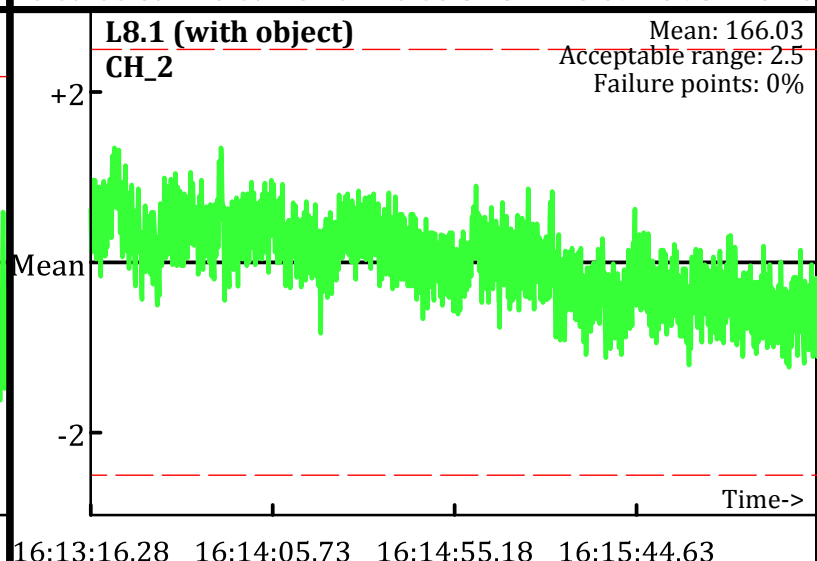

L7 (without object)
CH_1
Mean: -11.68
Acceptable range: 2.5
Failure points: 0%

16:07:00.70   16:07:46.13   16:08:31.55   16:09:16.98

L7 (without object)
CH_2
Mean: 13.12
Acceptable range: 2.5
Failure points: 0%

16:07:00.70   16:07:46.13   16:08:31.55   16:09:16.98

L8 (with object)
CH_1
Mean: 192.04
Acceptable range: 2.5
Failure points: 0%

16:13:16.30   16:14:05.75   16:14:55.20   16:15:44.66

L8 (with object)
CH_2
Mean: 155.36
Acceptable range: 2.5
Failure points: 0%

16:13:16.30   16:14:05.75   16:14:55.20   16:15:44.66

L9 (without object)
CH_1
Mean: -11.84
Acceptable range: 2.5
Failure points: 0%

16:17:15.11   16:17:31.84   16:17:48.56   16:18:05.29

L9 (without object)
CH_2
Mean: 13.09
Acceptable range: 2.5
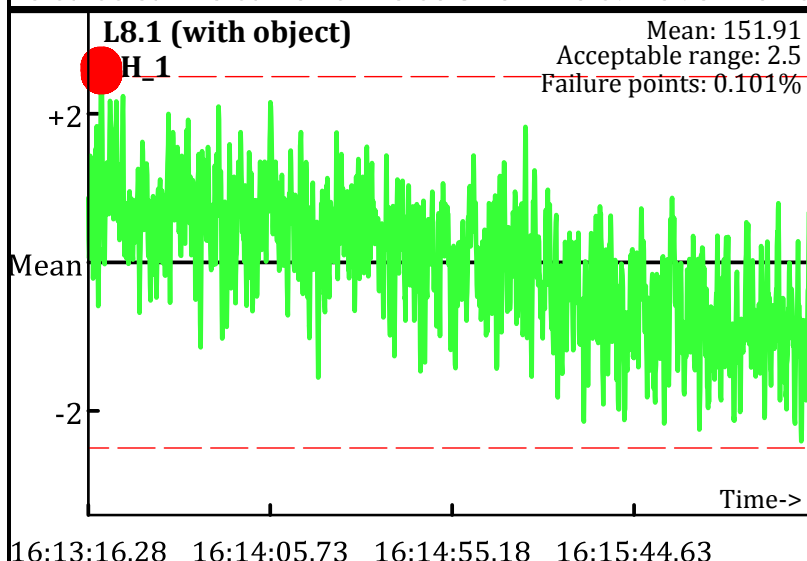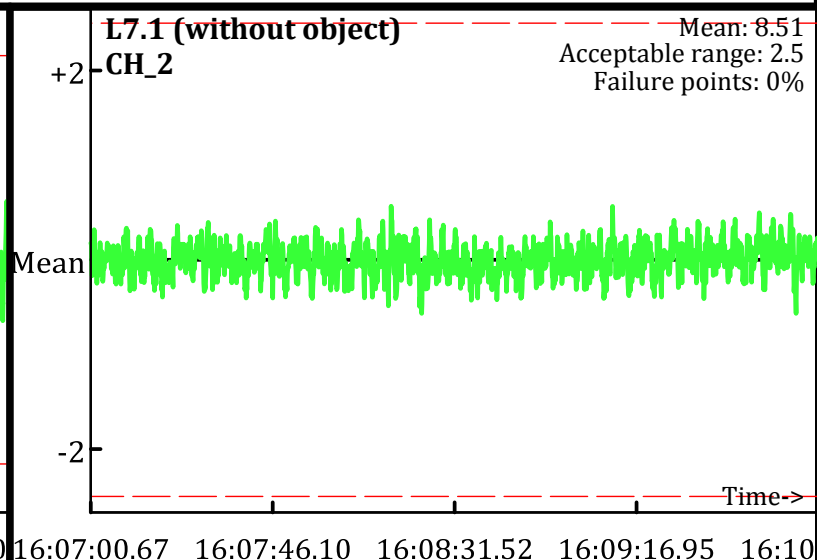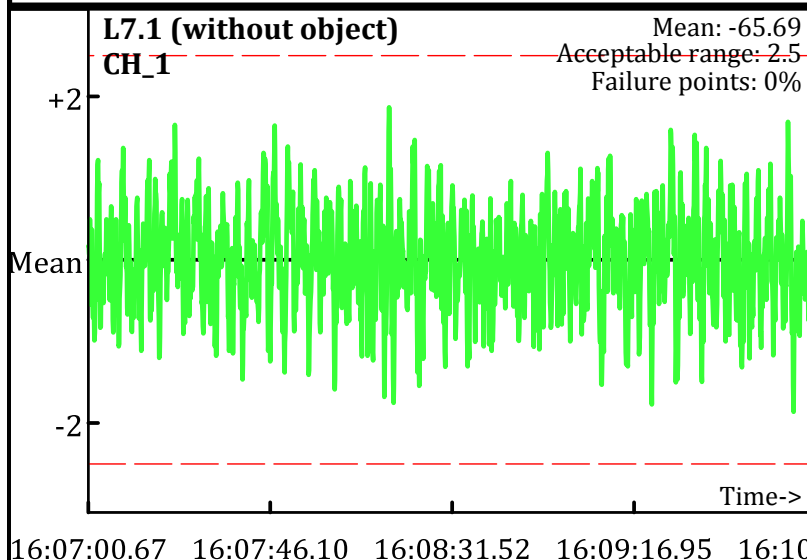Failure points: 0%

16:17:15.11   16:17:31.84   16:17:48.56   16:18:05.29

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
‐ ‐ ‐ Acceptable limits

PM test
Operator: BG & JH
Date: 7/21/2009

L7 (without object) CH_3
Mean: 7.51
Acceptable range: 2.5
Failure points: 0%

L7 (without object) CH_4
Mean: -1.22
Acceptable range: 2.5
Failure points: 0%

L8 (with object) CH_3
Mean: 92.23
Acceptable range: 2.5
Failure points: 0%

L8 (with object) CH_4
Mean: 41.05
Acceptable range: 2.5
Failure points: 0%

L9 (without object) CH_3
Mean: 7.52
Acceptable range: 2.5
Failure points: 0%

L9 (without object) CH_4
Mean: -1.23
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
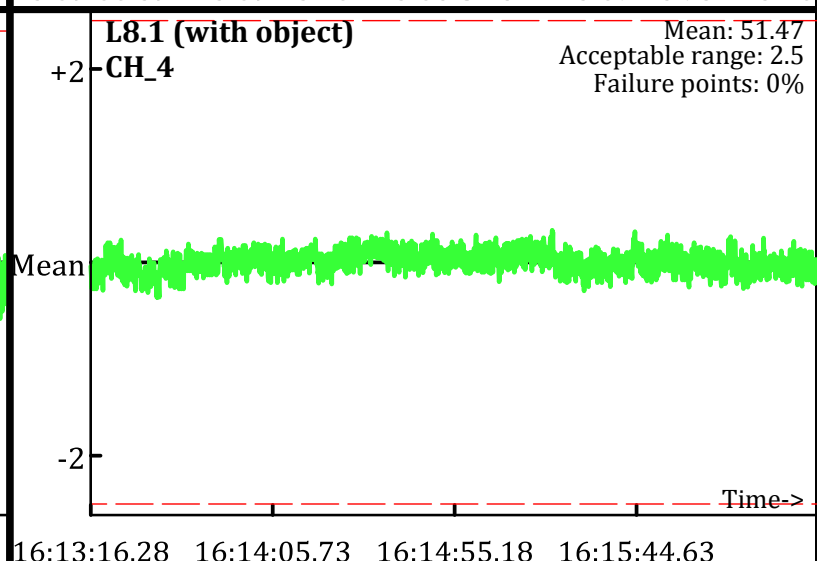Line Name: L7 L8 L9

Page: 2

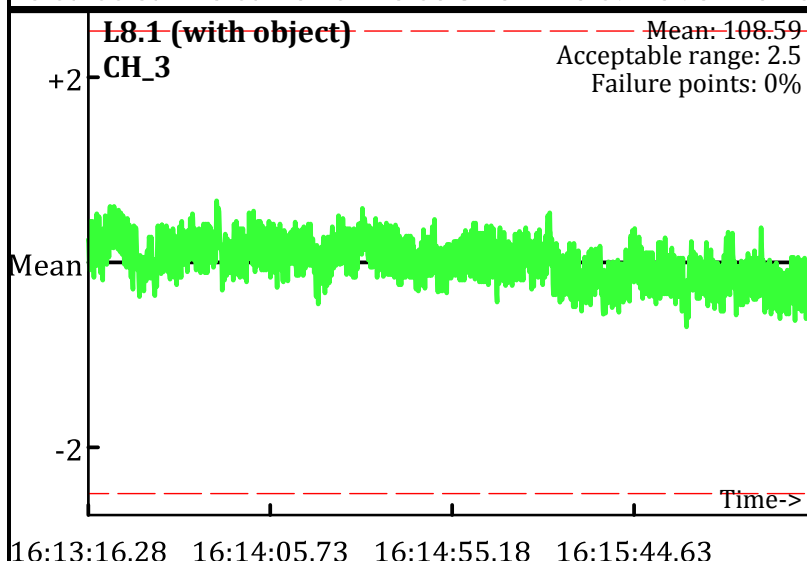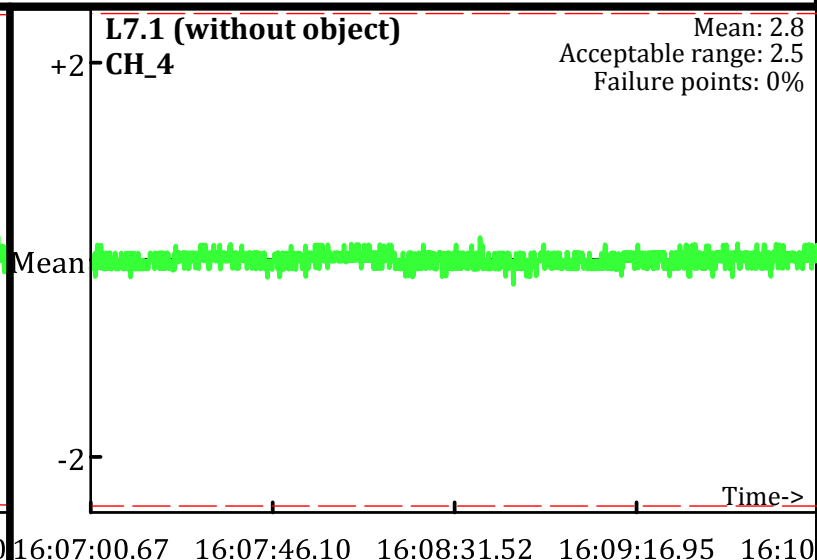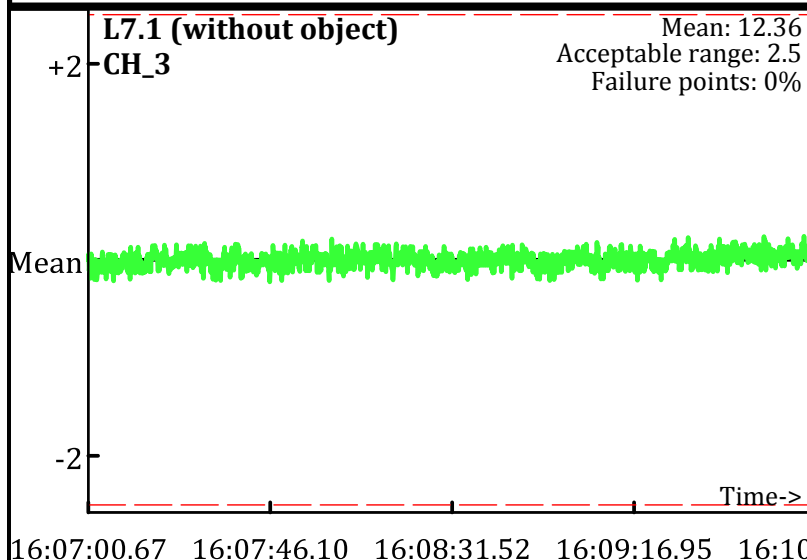# Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/21/2009

L7.1 (without object)
CH_1
Mean: -65.69
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_2
Mean: 8.51
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object)
CH_1
Mean: 151.91
Acceptable range: 2.5
Failure points: 0.101%

L8.1 (with object)
CH_2
Mean: 166.03
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_1
Mean: -65.92
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_2
Mean: 8.58
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
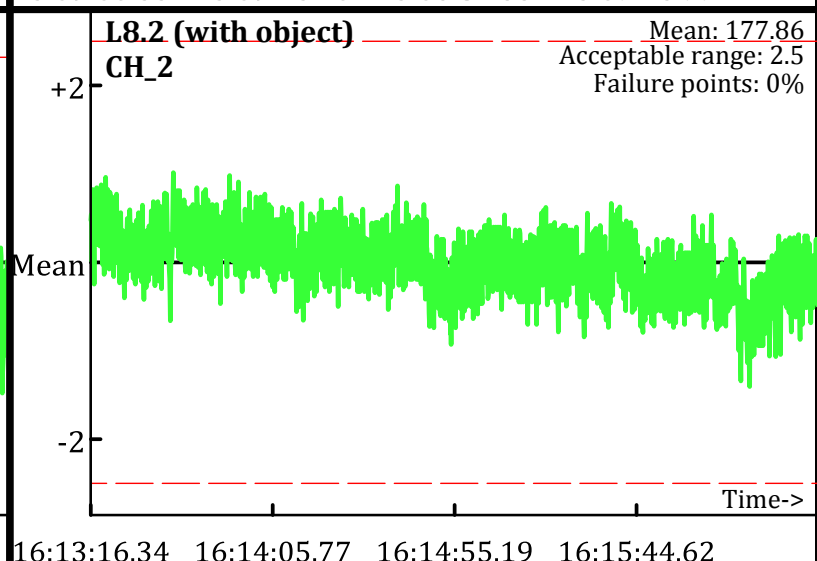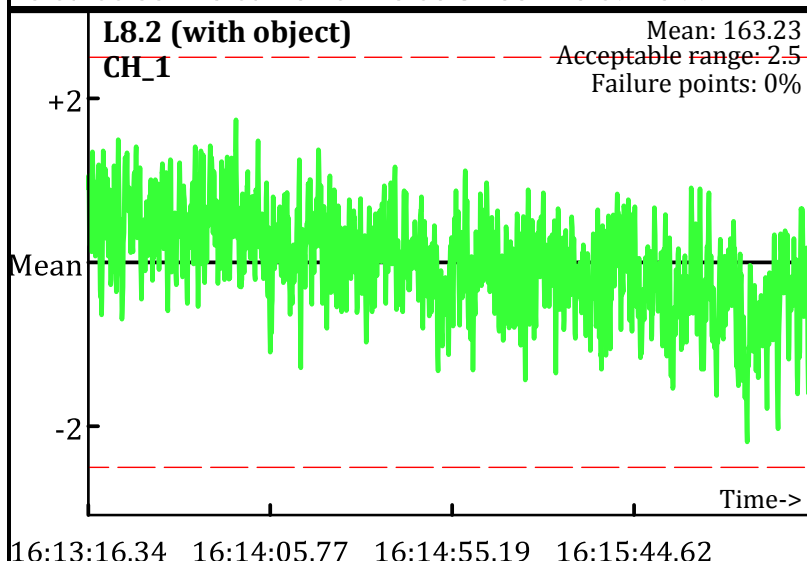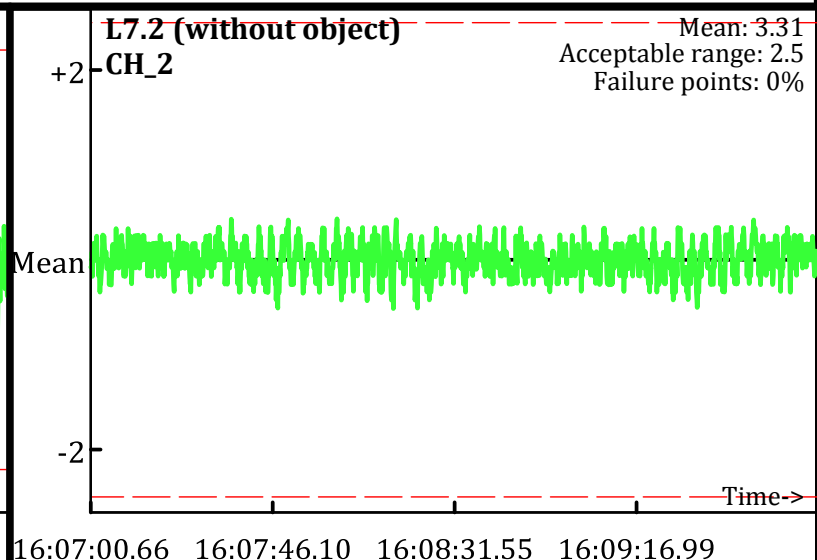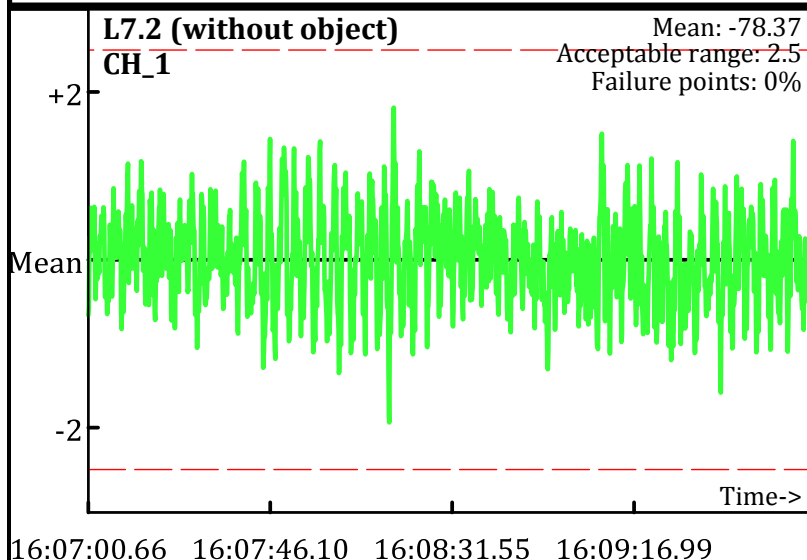Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/21/2009

L7.1 (without object)
CH_3

Mean: 12.36
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:07:00.67   16:07:46.10   16:08:31.52   16:09:16.95   16:10

L7.1 (without object)
CH_4

Mean: 2.8
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:07:00.67   16:07:46.10   16:08:31.52   16:09:16.95   16:10

L8.1 (with object)
CH_3

Mean: 108.59
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:13:16.28   16:14:05.73   16:14:55.18   16:15:44.63

L8.1 (with object)
CH_4

Mean: 51.47
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:13:16.28   16:14:05.73   16:14:55.18   16:15:44.63

L9.1 (without object)
CH_3

Mean: 12.47
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:17:15.08   16:17:31.80   16:17:48.52   16:18:05.25

L9.1 (without object)
CH_4

Mean: 2.86
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:17:15.08   16:17:31.80   16:17:48.52   16:18:05.25

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
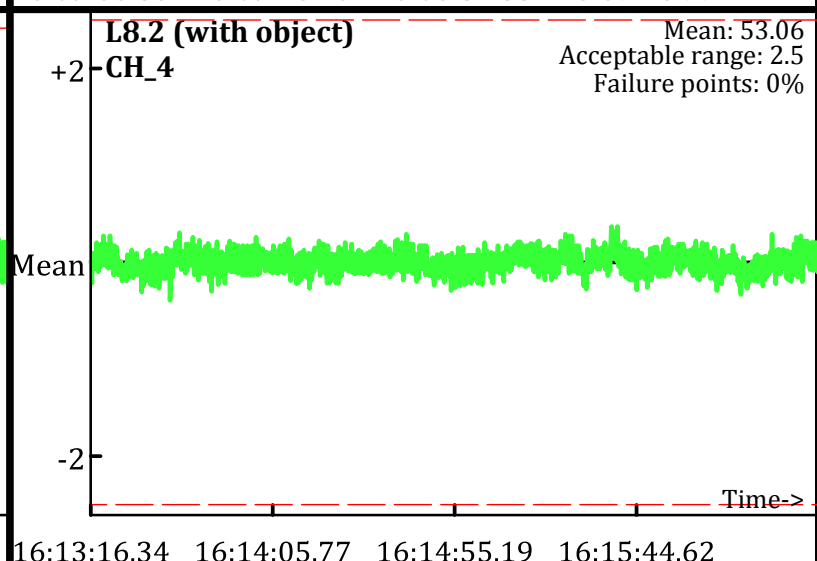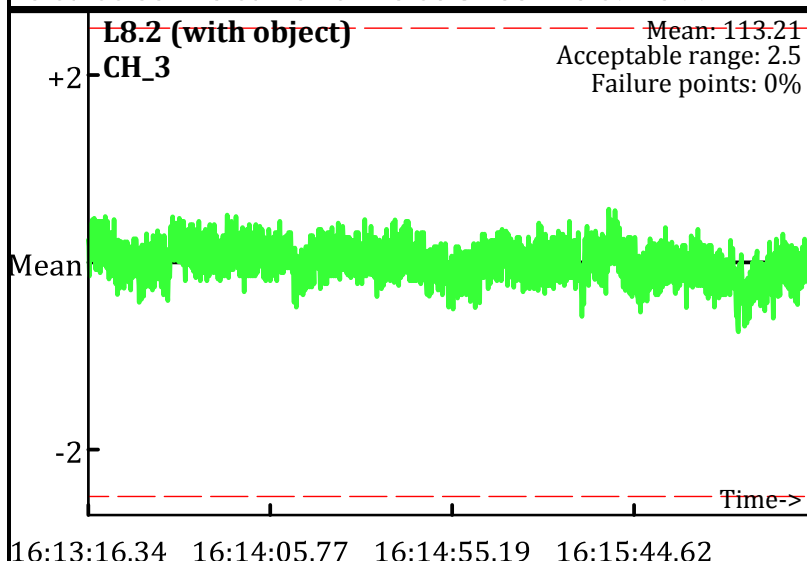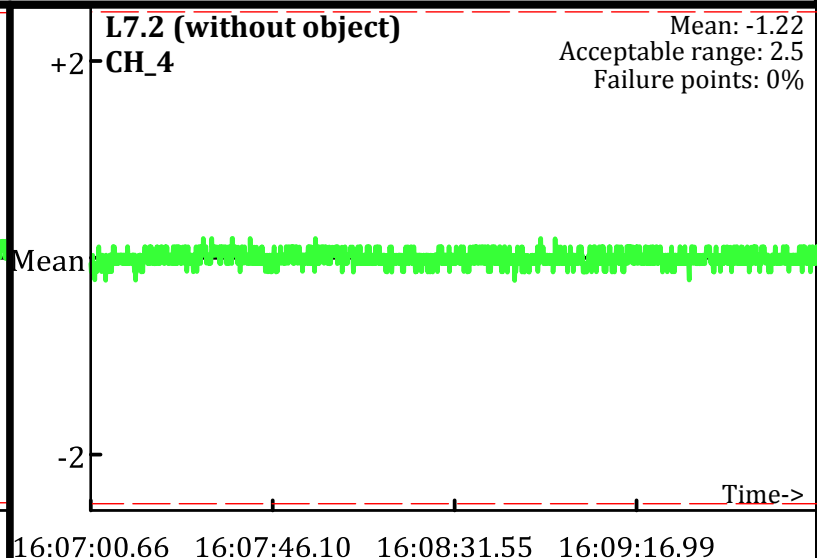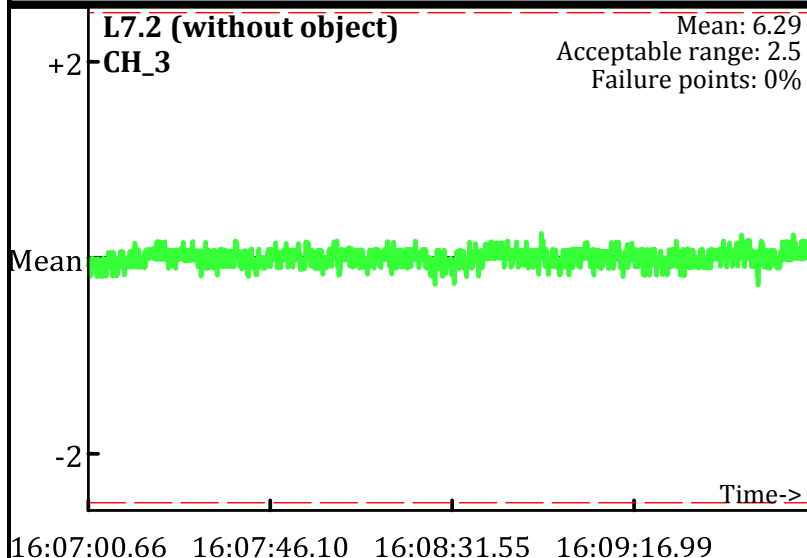Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/21/2009

L7.2 (without object)
CH_1
Mean: -78.37
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_2
Mean: 3.31
Acceptable range: 2.5
Failure points: 0%

16:07:00.66   16:07:46.10   16:08:31.55   16:09:16.99

L8.2 (with object)
CH_1
Mean: 163.23
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_2
Mean: 177.86
Acceptable range: 2.5
Failure points: 0%

16:13:16.34   16:14:05.77   16:14:55.19   16:15:44.62

L9.2 (without object)
CH_1
Mean: -78.57
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object)
CH_2
Mean: 3.36
Acceptable range: 2.5
Failure points: 0%

16:17:15.14   16:17:31.84   16:17:48.54   16:18:05.24   16:18

Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
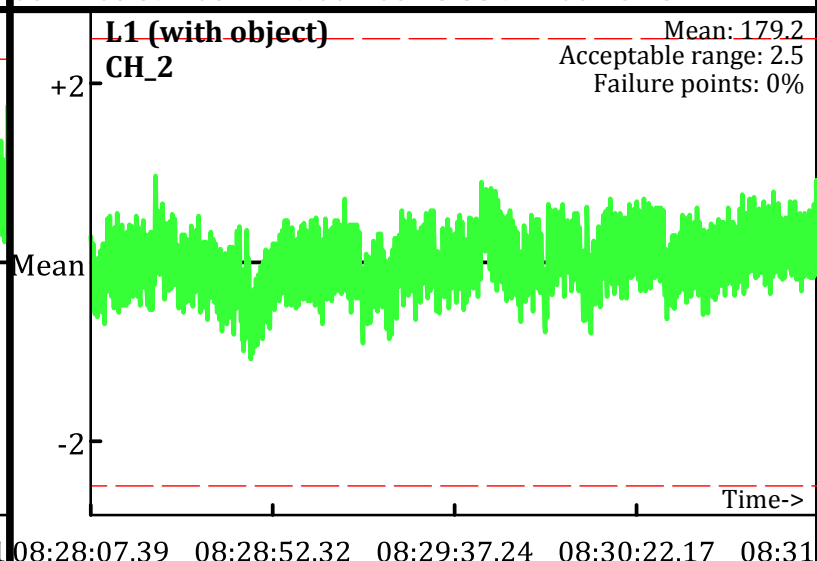Line Name: L7.2 L8.2 L9.2

Page: 1

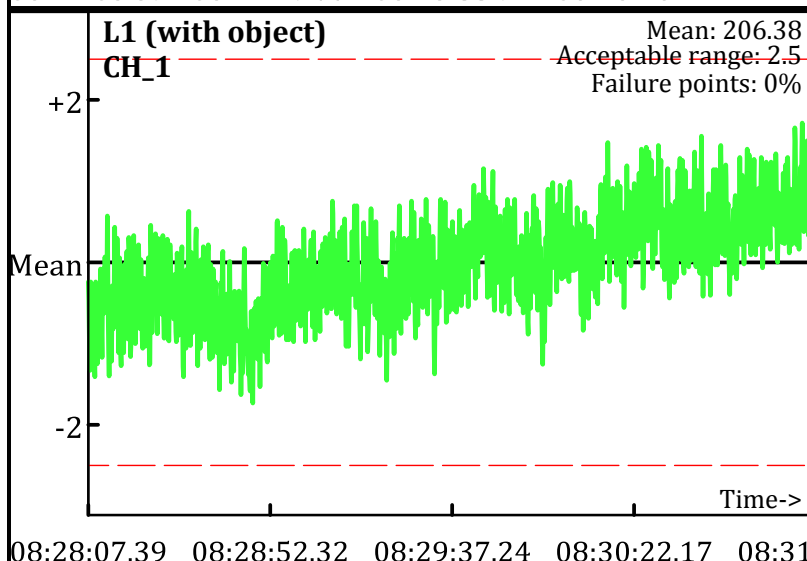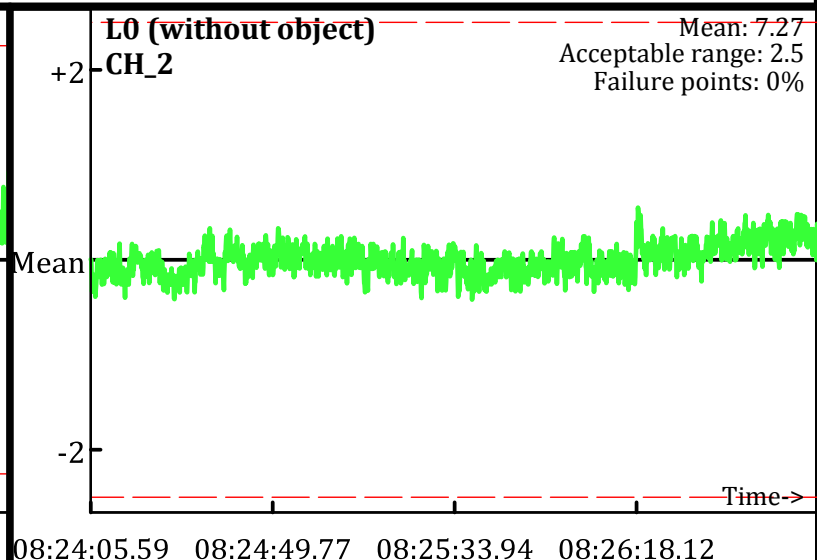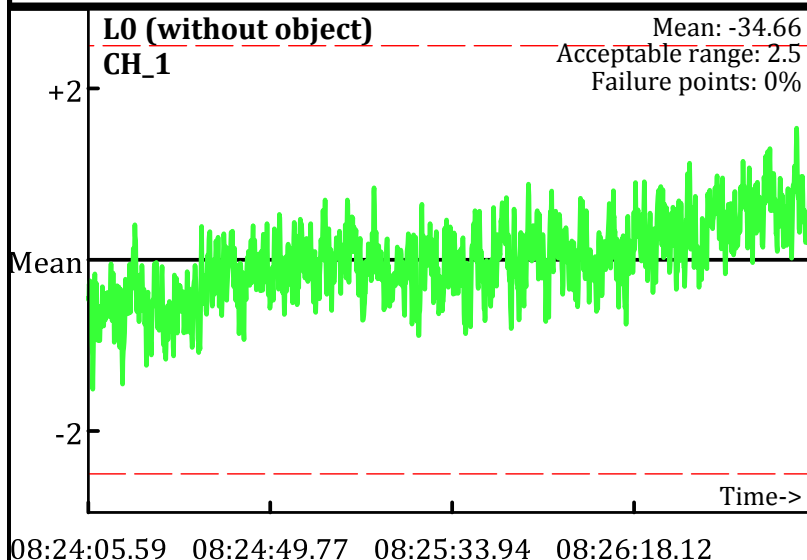# Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
- - - Acceptable limits

PM test
Operator: BG & JH
Date: 7/21/2009

L7.2 (without object)
CH_3

Mean: 6.29
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:07:00.66   16:07:46.10   16:08:31.55   16:09:16.99

L7.2 (without object)
CH_4

Mean: -1.22
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:07:00.66   16:07:46.10   16:08:31.55   16:09:16.99

L8.2 (with object)
CH_3

Mean: 113.21
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:13:16.34   16:14:05.77   16:14:55.19   16:15:44.62

L8.2 (with object)
CH_4

Mean: 53.06
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:13:16.34   16:14:05.77   16:14:55.19   16:15:44.62

L9.2 (without object)
CH_3

Mean: 6.38
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:17:15.14   16:17:31.84   16:17:48.54   16:18:05.24   16:18

L9.2 (without object)
CH_4

Mean: -1.17
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:17:15.14   16:17:31.84   16:17:48.54   16:18:05.24   16:18

Database: C:_QCReports_Ord_Data\072109\QC\072109_TA_QC.gdb
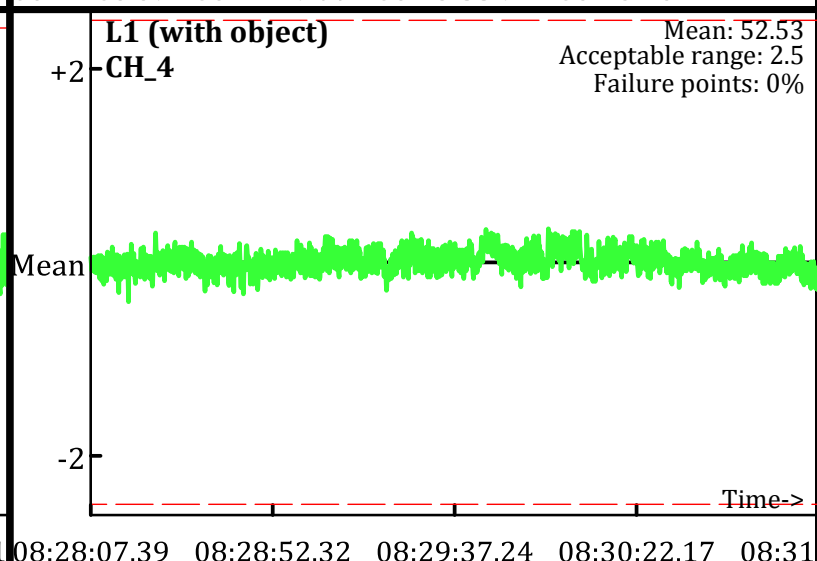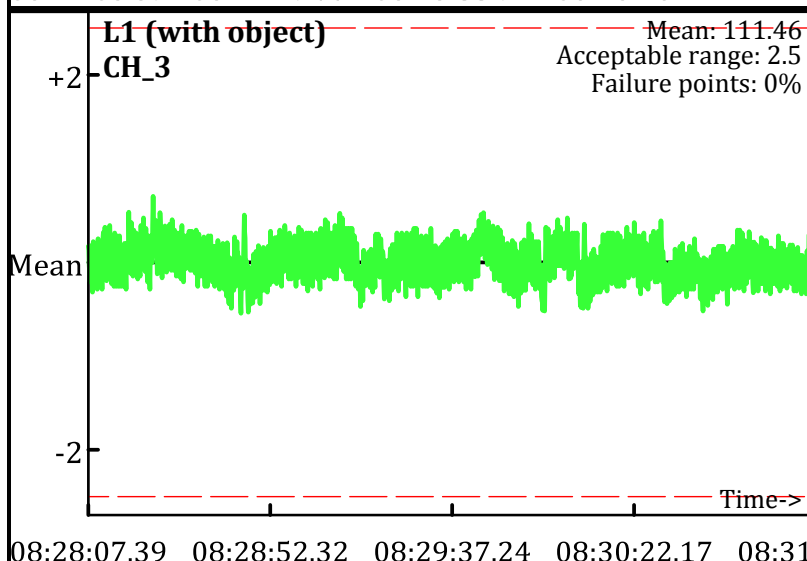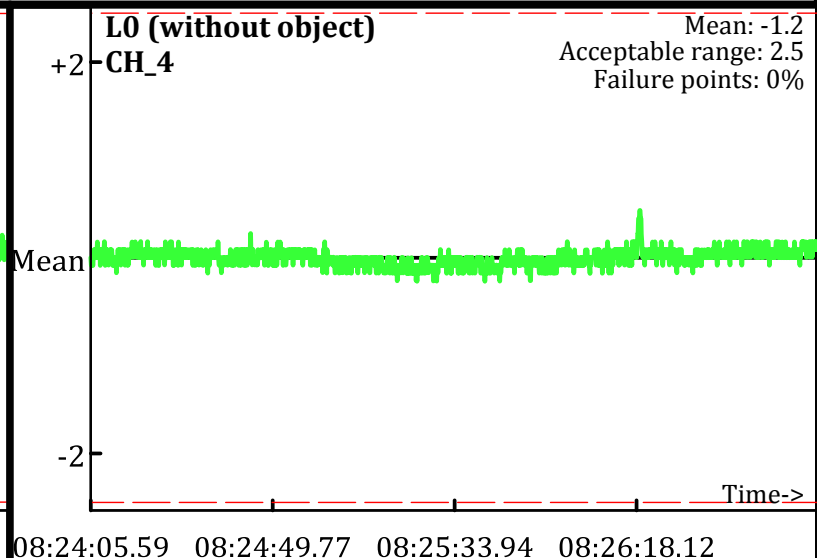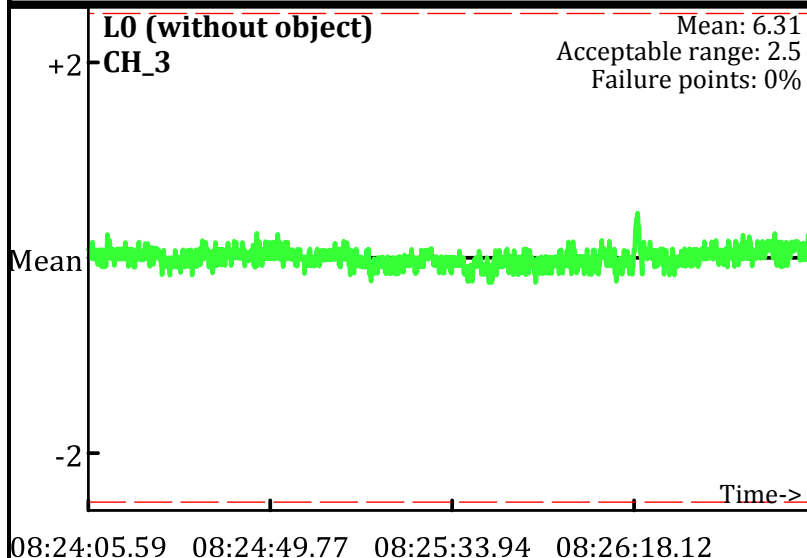Line Name: L7.2 L8.2 L9.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

AM test
Operator: BG & JH
Date: 7/22/2009
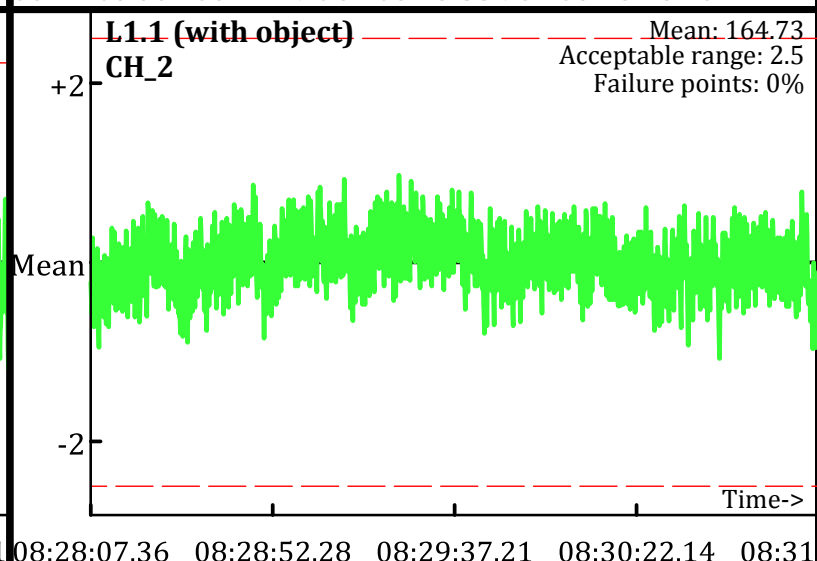
L0 (without object)
CH_1
Mean: -34.66
Acceptable range: 2.5
Failure points: 0%

08:24:05.59   08:24:49.77   08:25:33.94   08:26:18.12

L0 (without object)
CH_2
Mean: 7.27
Acceptable range: 2.5
Failure points: 0%

08:24:05.59   08:24:49.77   08:25:33.94   08:26:18.12

L1 (with object)
CH_1
Mean: 206.38
Acceptable range: 2.5
Failure points: 0%

08:28:07.39   08:28:52.32   08:29:37.24   08:30:22.17   08:31

L1 (with object)
CH_2
Mean: 179.2
Acceptable range: 2.5
Failure points: 0%

08:28:07.39   08:28:52.32   08:29:37.24   08:30:22.17   08:31

L2 (without object)
CH_1
Mean: -31.68
Acceptable range: 2.5
Failure points: 0%

08:31:32.19   08:31:47.14   08:32:02.09   08:32:17.03

L2 (without object)
CH_2
Mean: 8.16
Acceptable range: 2.5
Failure points: 0%

08:31:32.19   08:31:47.14   08:32:02.09   08:32:17.03

Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L0 L1 L2

Page: 1

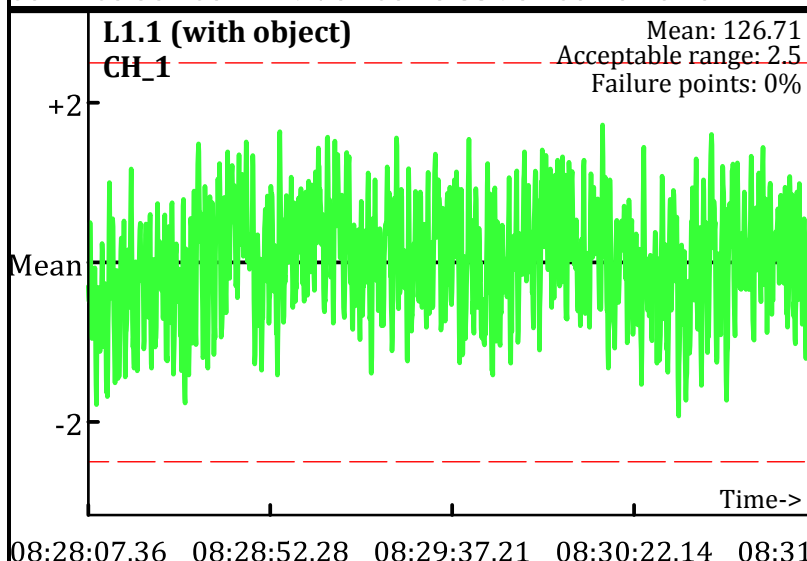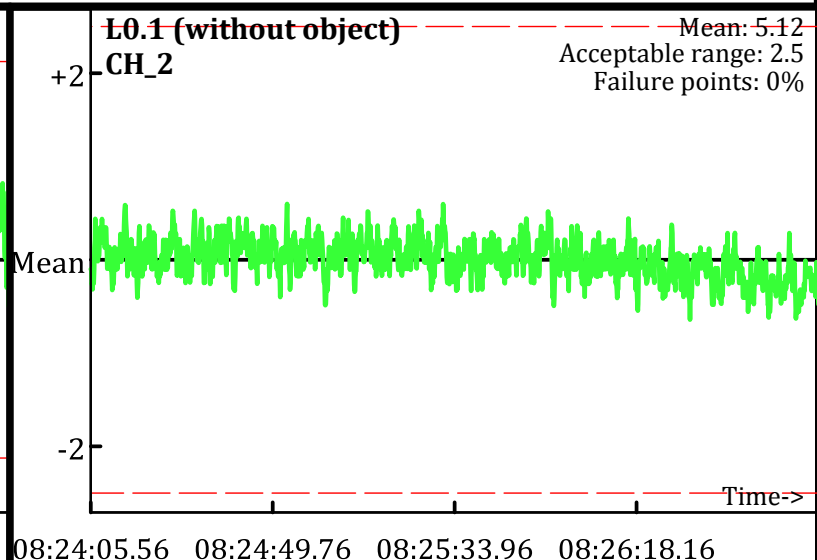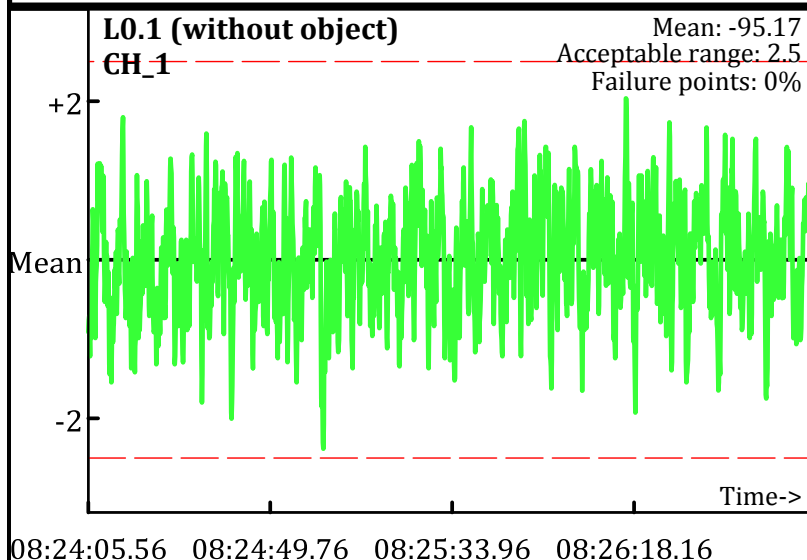# Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits

AM test
Operator: BG & JH
Date: 7/22/2009
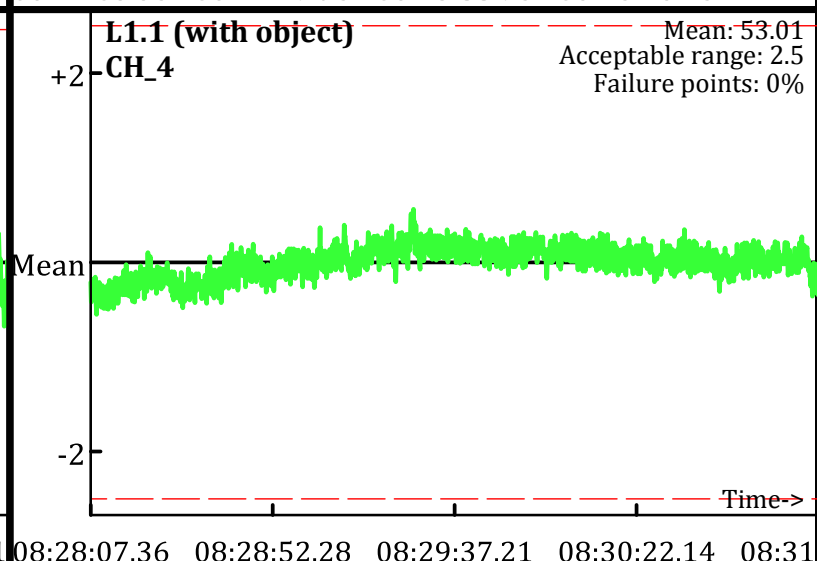

L0 (without object)
CH_3
Mean: 6.31
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_4
Mean: -1.2
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_3
Mean: 111.46
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_4
Mean: 52.53
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_3
Mean: 6.55
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_4
Mean: -1.1
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
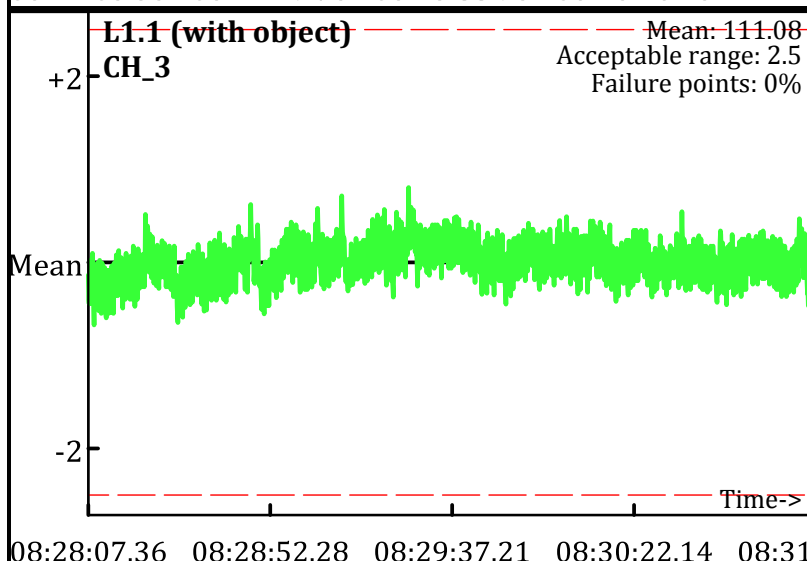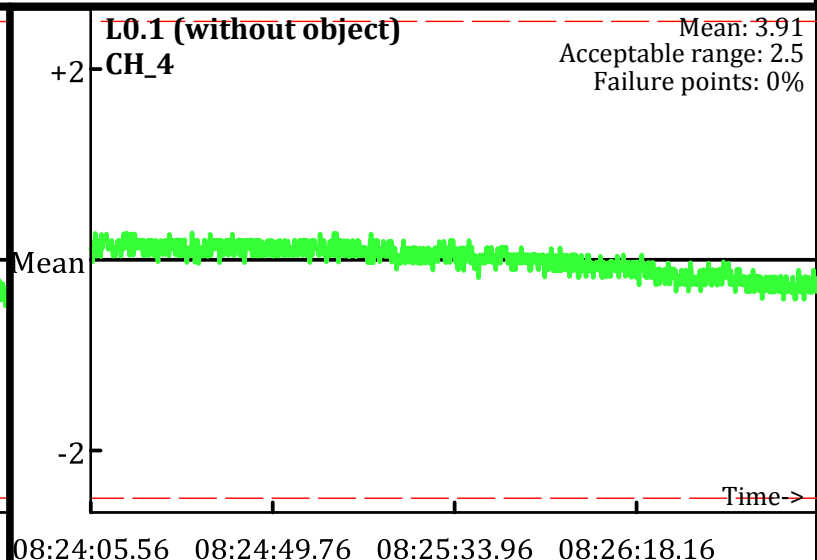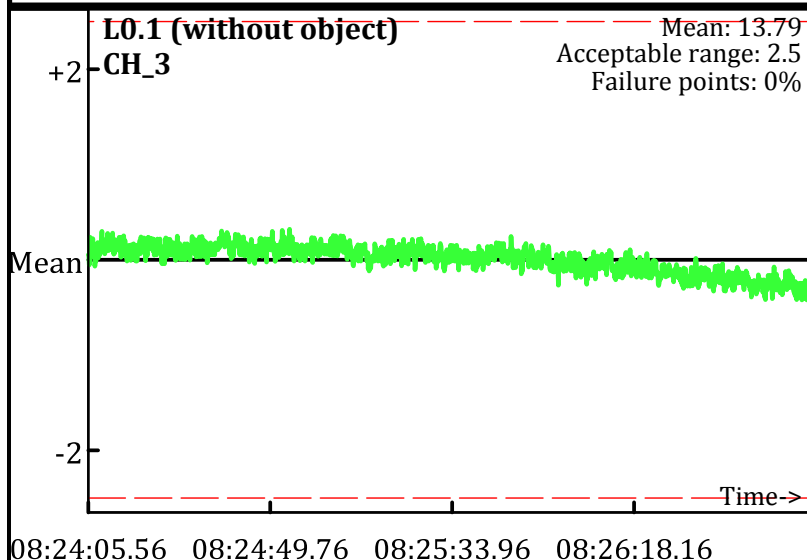Line Name: L0 L1 L2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
— — — Acceptable limits

AM test
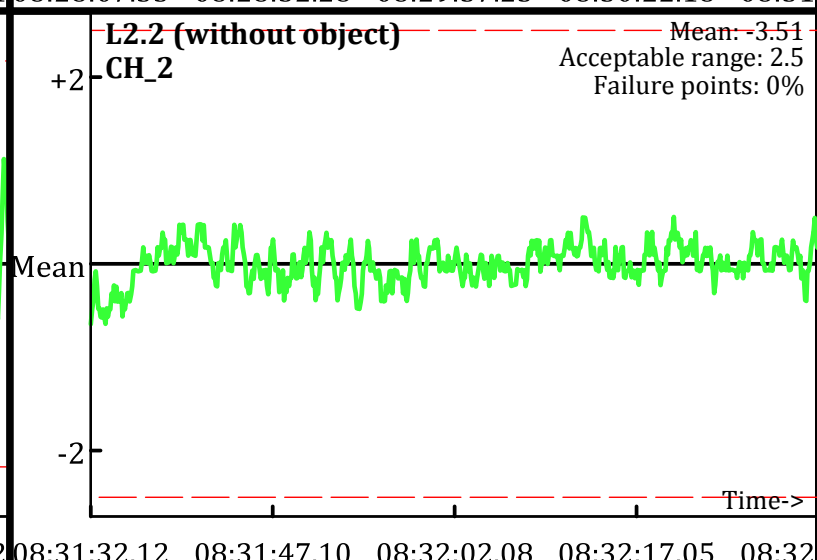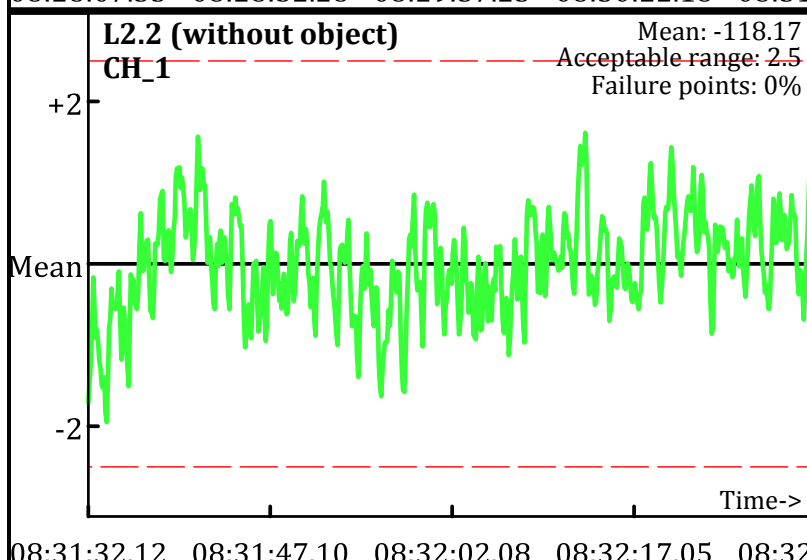Operator: BG & JH
Date: 7/22/2009

L0.1 (without object)
CH_1
Mean: -95.17
Acceptable range: 2.5
Failure points: 0%

Time->

08:24:05.56 08:24:49.76 08:25:33.96 08:26:18.16

L0.1 (without object)
CH_2
Mean: 5.12
Acceptable range: 2.5
Failure points: 0%

Time->

08:24:05.56 08:24:49.76 08:25:33.96 08:26:18.16

L1.1 (with object)
CH_1
Mean: 126.71
Acceptable range: 2.5
Failure points: 0%

Time->

08:28:07.36 08:28:52.28 08:29:37.21 08:30:22.14 08:31

L1.1 (with object)
CH_2
Mean: 164.73
Acceptable range: 2.5
Failure points: 0%

Time->

08:28:07.36 08:28:52.28 08:29:37.21 08:30:22.14 08:31

L2.1 (without object)
CH_1
Mean: -94.15
Acceptable range: 2.5
Failure points: 0%

Time->

08:31:32.16 08:31:47.13 08:32:02.11 08:32:17.09 08:32

L2.1 (without object)
CH_2
Mean: 5.28
Acceptable range: 2.5
Failure points: 0%

Time->

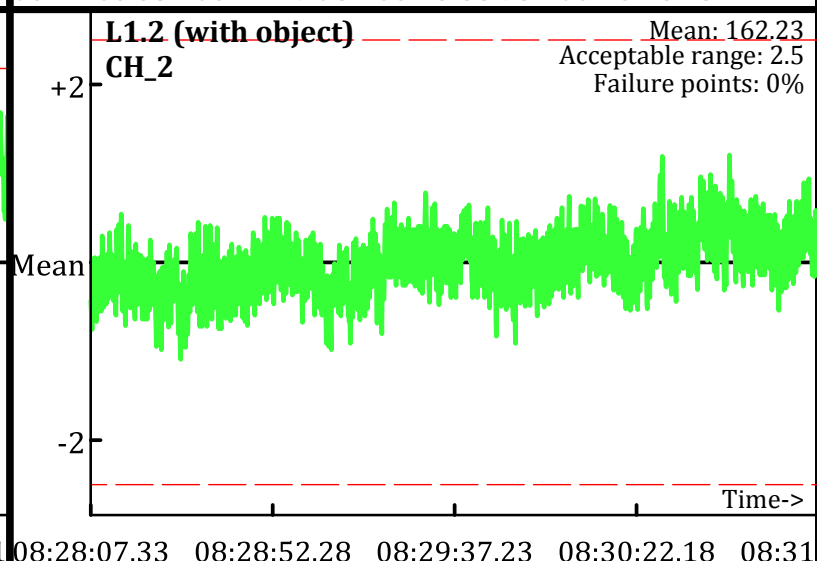08:31:32.16 08:31:47.13 08:32:02.11 08:32:17.09 08:32

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
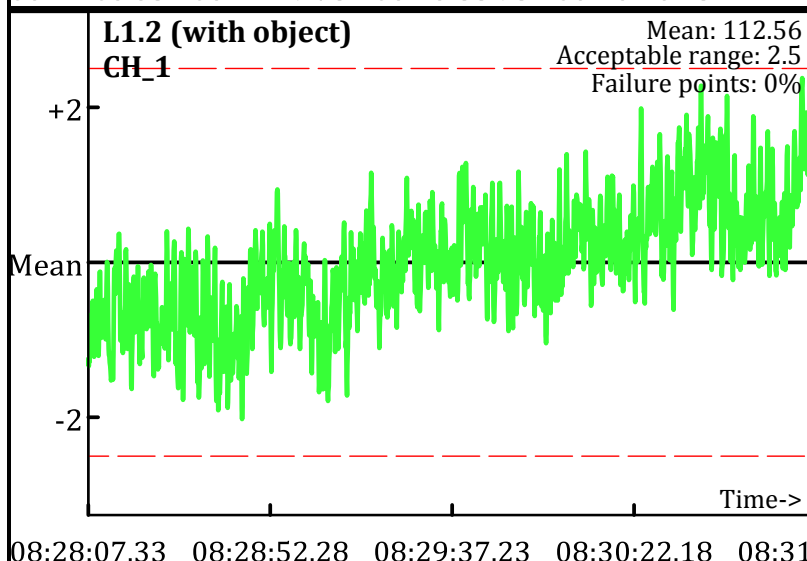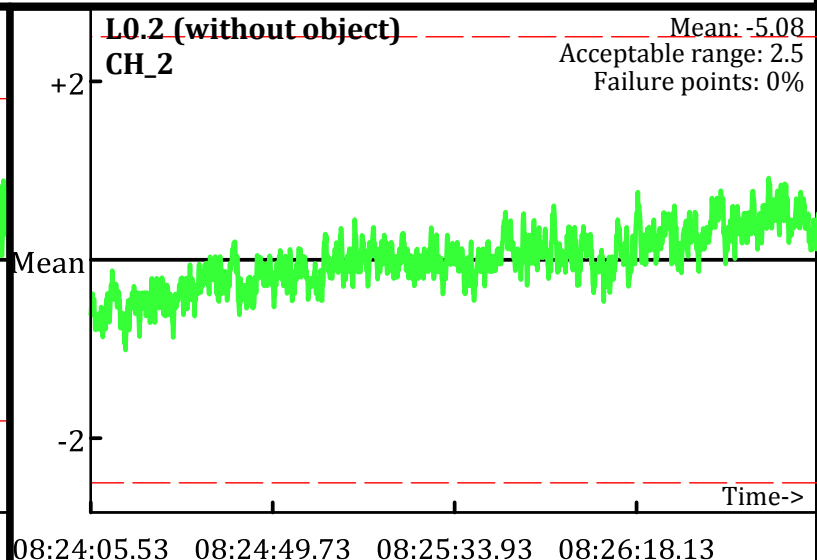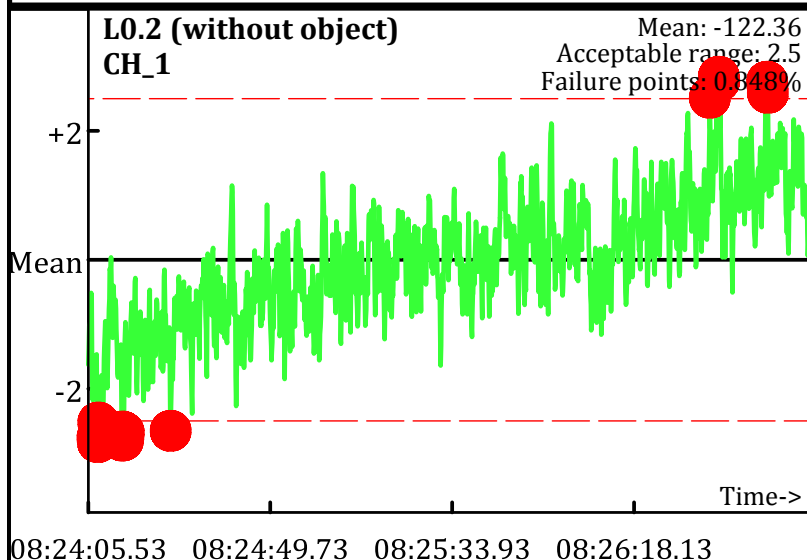- - - Acceptable limits

AM test
Operator: BG & JH
Date: 7/22/2009
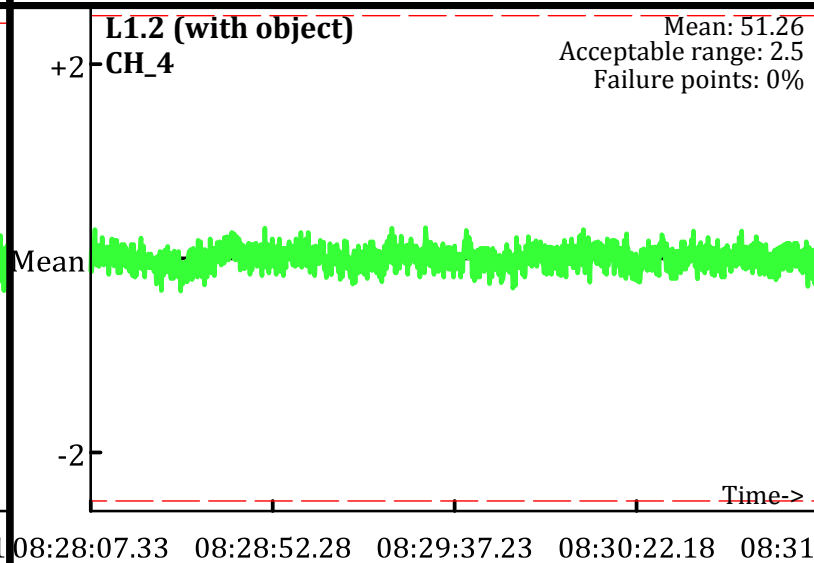

L0.1 (without object)
CH_3
Mean: 13.79
Acceptable range: 2.5
Failure points: 0%
Time->
08:24:05.56 08:24:49.76 08:25:33.96 08:26:18.16

L0.1 (without object)
CH_4
Mean: 3.91
Acceptable range: 2.5
Failure points: 0%
Time->
08:24:05.56 08:24:49.76 08:25:33.96 08:26:18.16

L1.1 (with object)
CH_3
Mean: 111.08
Acceptable range: 2.5
Failure points: 0%
Time->
08:28:07.36 08:28:52.28 08:29:37.21 08:30:22.14 08:31

L1.1 (with object)
CH_4
Mean: 53.01
Acceptable range: 2.5
Failure points: 0%
Time->
08:28:07.36 08:28:52.28 08:29:37.21 08:30:22.14 08:31

L2.1 (without object)
CH_3
Mean: 13.86
Acceptable range: 2.5
Failure points: 0%
Time->
08:31:32.16 08:31:47.13 08:32:02.11 08:32:17.09 08:32

L2.1 (without object)
CH_4
Mean: 3.98
Acceptable range: 2.5
Failure points: 0%
Time->
08:31:32.16 08:31:47.13 08:32:02.11 08:32:17.09 08:32

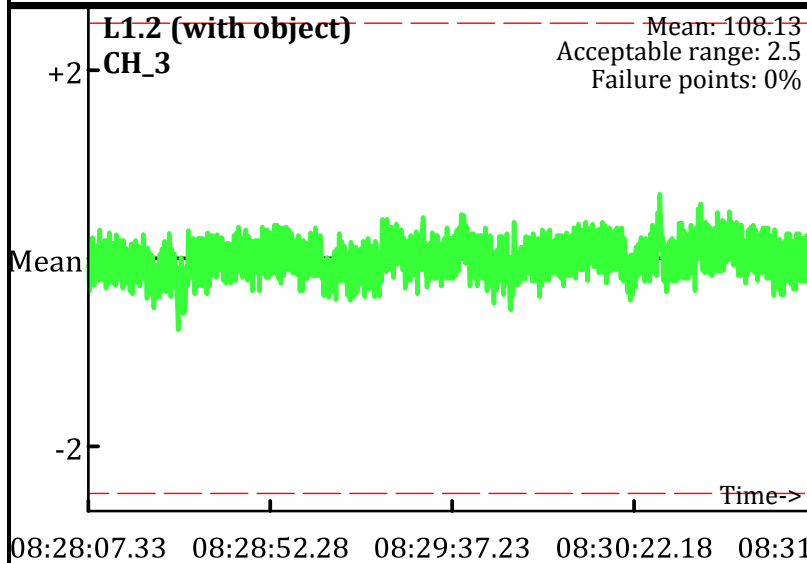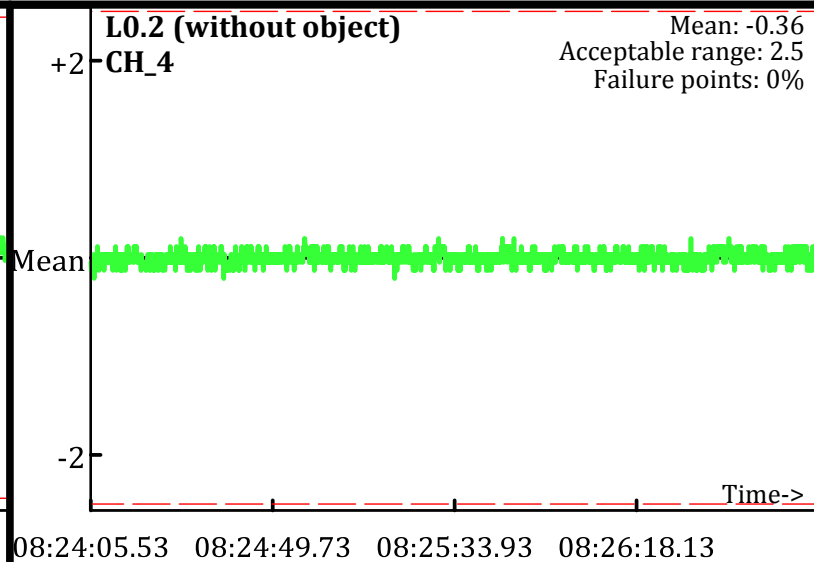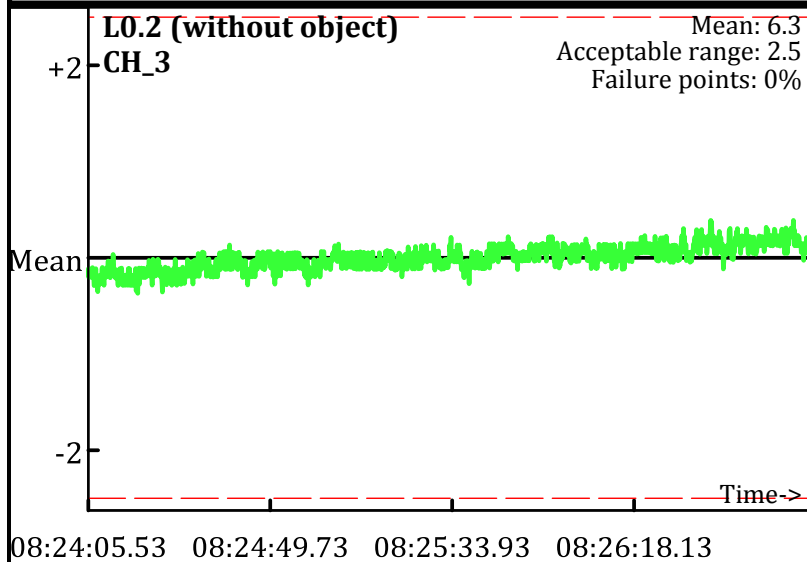Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
--- Acceptable limits

AM test
Operator: BG & JH
Date: 7/22/2009
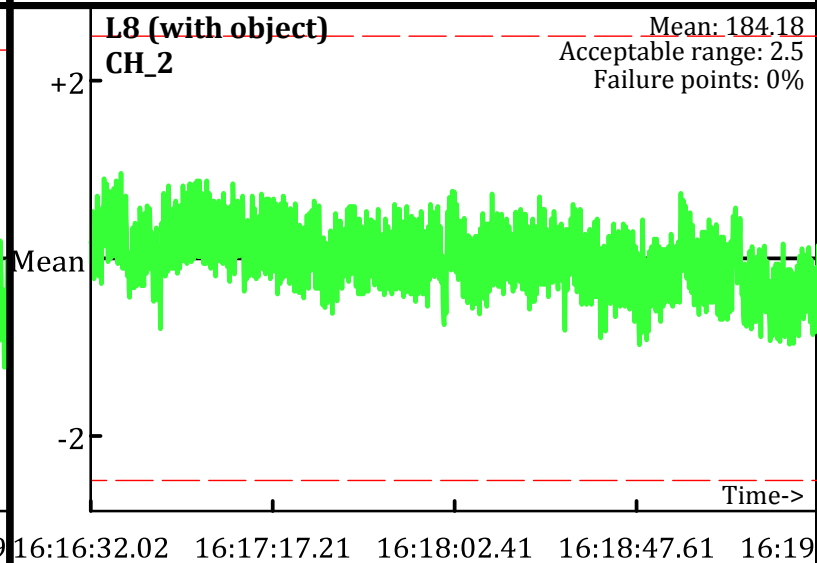
L0.2 (without object)
CH_1
Mean: -122.36
Acceptable range: 2.5
Failure points: 0.848%

L0.2 (without object)
CH_2
Mean: -5.08
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_1
Mean: 112.56
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_2
Mean: 162.23
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_1
Mean: -118.17
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
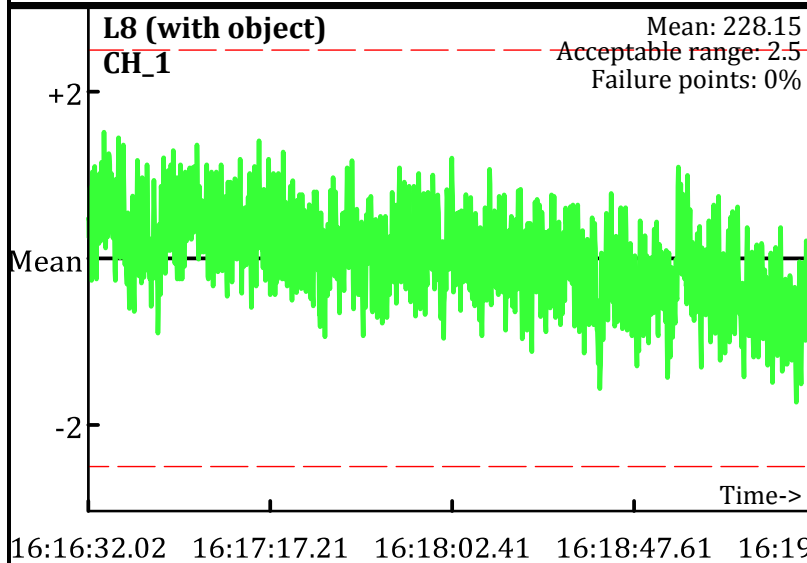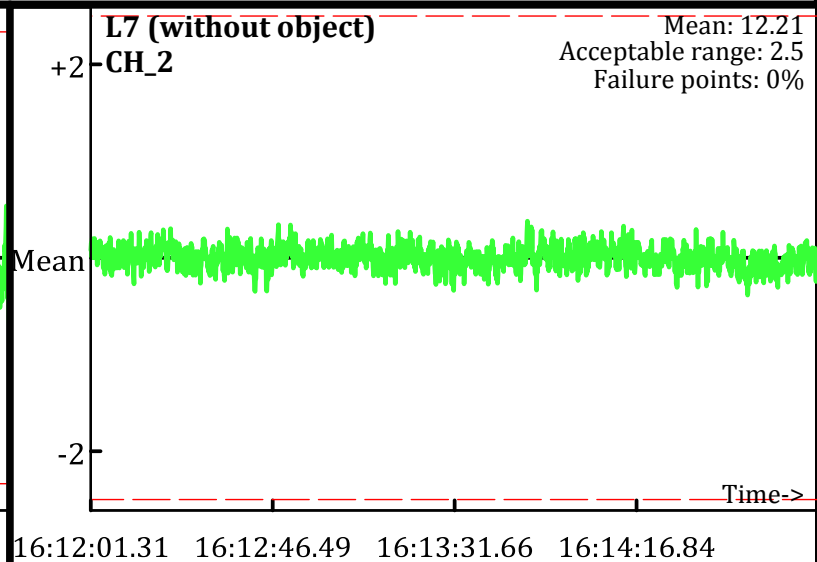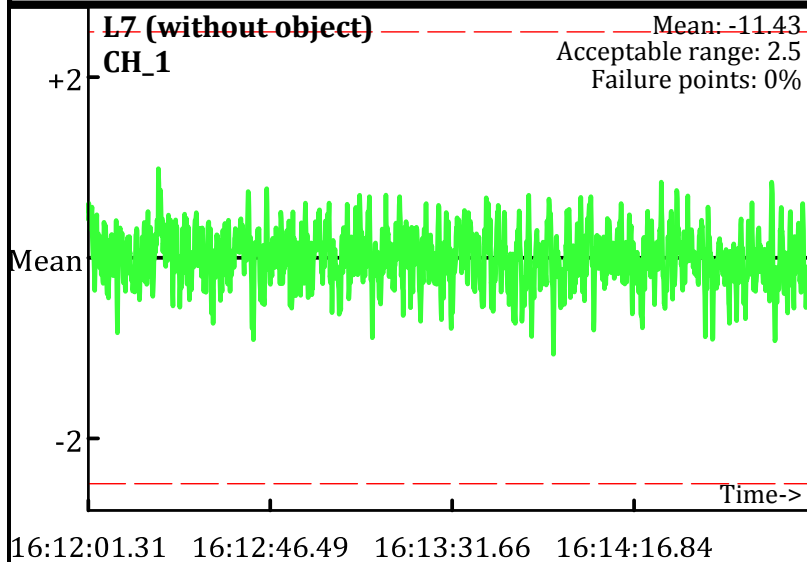**CH_2**
Mean: -3.51
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/22/2009
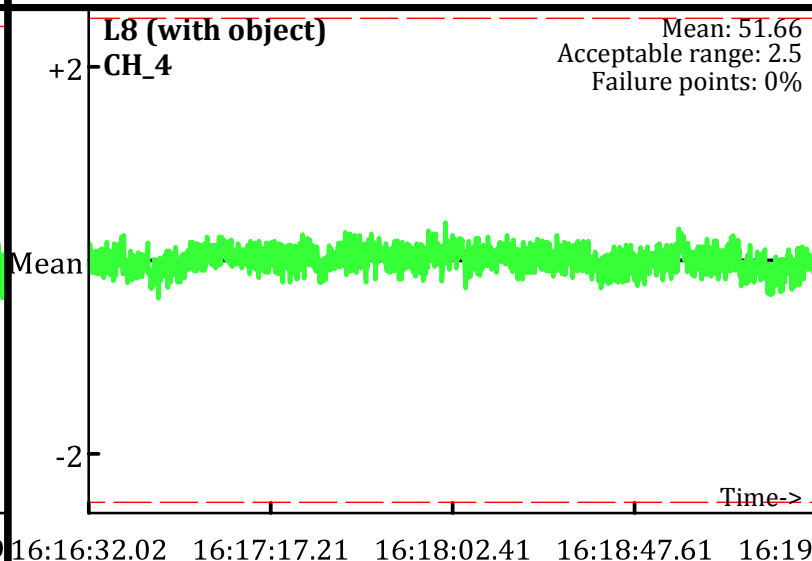
L0.2 (without object)
CH_3
+2
Mean
-2
Mean: 6.3
Acceptable range: 2.5
Failure points: 0%
Time->
08:24:05.53   08:24:49.73   08:25:33.93   08:26:18.13

L0.2 (without object)
CH_4
+2
Mean
-2
Mean: -0.36
Acceptable range: 2.5
Failure points: 0%
Time->
08:24:05.53   08:24:49.73   08:25:33.93   08:26:18.13

L1.2 (with object)
CH_3
+2
Mean
-2
Mean: 108.13
Acceptable range: 2.5
Failure points: 0%
Time->
08:28:07.33   08:28:52.28   08:29:37.23   08:30:22.18   08:31

L1.2 (with object)
CH_4
+2
Mean
-2
Mean: 51.26
Acceptable range: 2.5
Failure points: 0%
Time->
08:28:07.33   08:28:52.28   08:29:37.23   08:30:22.18   08:31

L2.2 (without object)
CH_3
+2
Mean
-2
Mean: 6.83
Acceptable range: 2.5
Failure points: 0%
Time->
08:31:32.12   08:31:47.10   08:32:02.08   08:32:17.05   08:32

L2.2 (without object)
CH_4
+2
Mean
-2
Mean: -0.21
Acceptable range: 2.5
Failure points: 0%
Time->
08:31:32.12   08:31:47.10   08:32:02.08   08:32:17.05   08:32

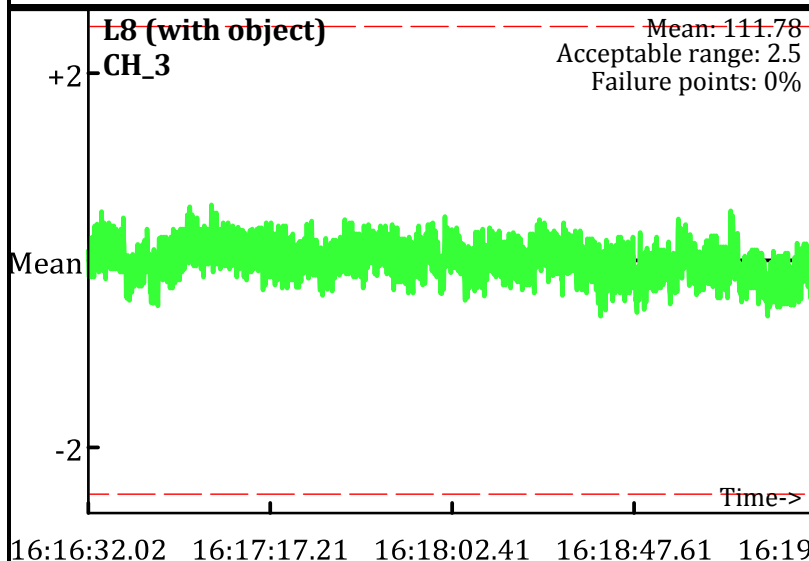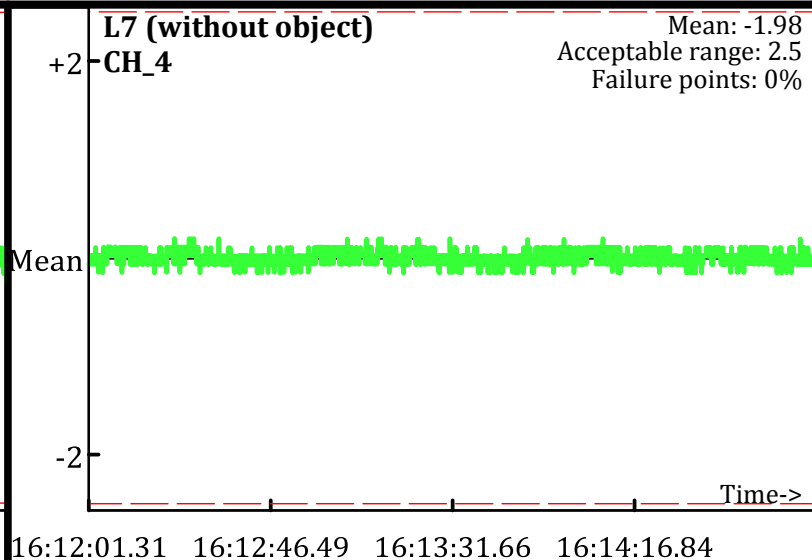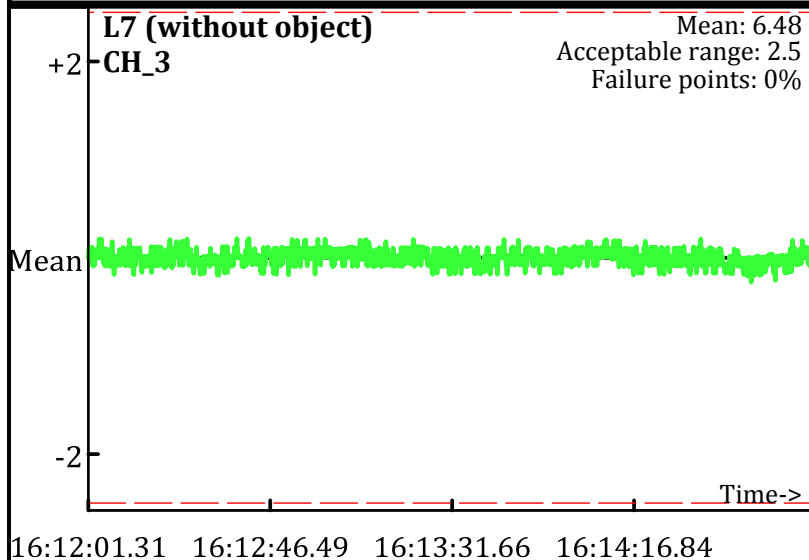Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/22/2009
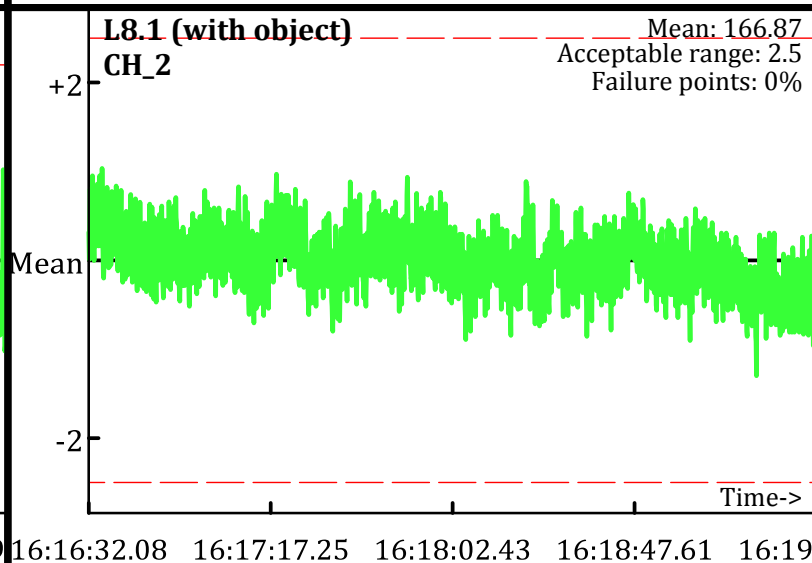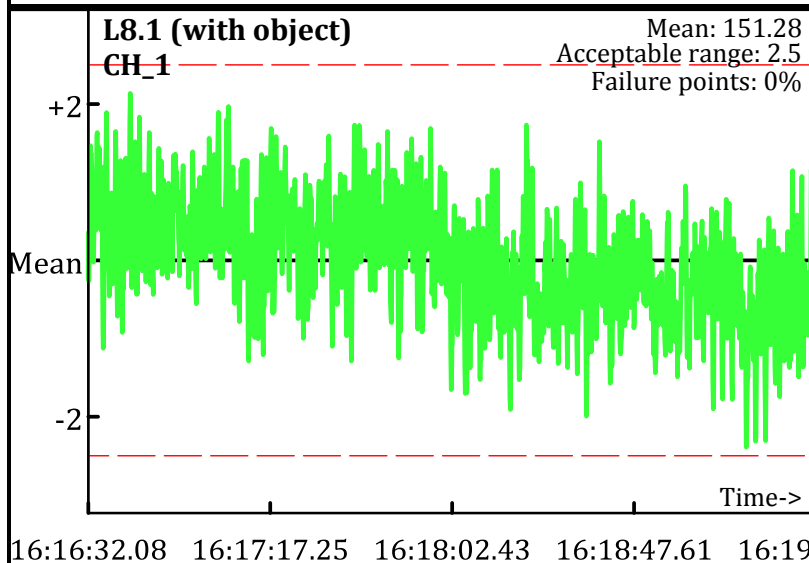
L7 (without object)
CH_1
Mean: -11.43
Acceptable range: 2.5
Failure points: 0%

Time->

16:12:01.31   16:12:46.49   16:13:31.66   16:14:16.84

L7 (without object)
CH_2
Mean: 12.21
Acceptable range: 2.5
Failure points: 0%

Time->

16:12:01.31   16:12:46.49   16:13:31.66   16:14:16.84

L8 (with object)
CH_1
Mean: 228.15
Acceptable range: 2.5
Failure points: 0%

Time->

16:16:32.02   16:17:17.21   16:18:02.41   16:18:47.61   16:19

L8 (with object)
CH_2
Mean: 184.18
Acceptable range: 2.5
Failure points: 0%

Time->

16:16:32.02   16:17:17.21   16:18:02.41   16:18:47.61   16:19

L9 (without object)
CH_1
Mean: -11.35
Acceptable range: 2.5
Failure points: 0%

Time->

16:20:07.80   16:20:22.27   16:20:36.75   16:20:51.23

L9 (without object)
CH_2
Mean: 12.31
Acceptable range: 2.5
Failure points: 0%

Time->

16:20:07.80   16:20:22.27   16:20:36.75   16:20:51.23

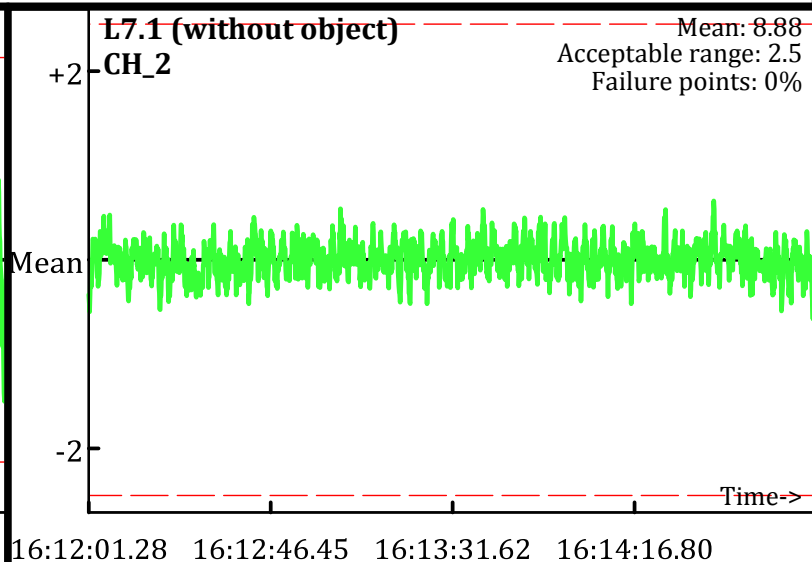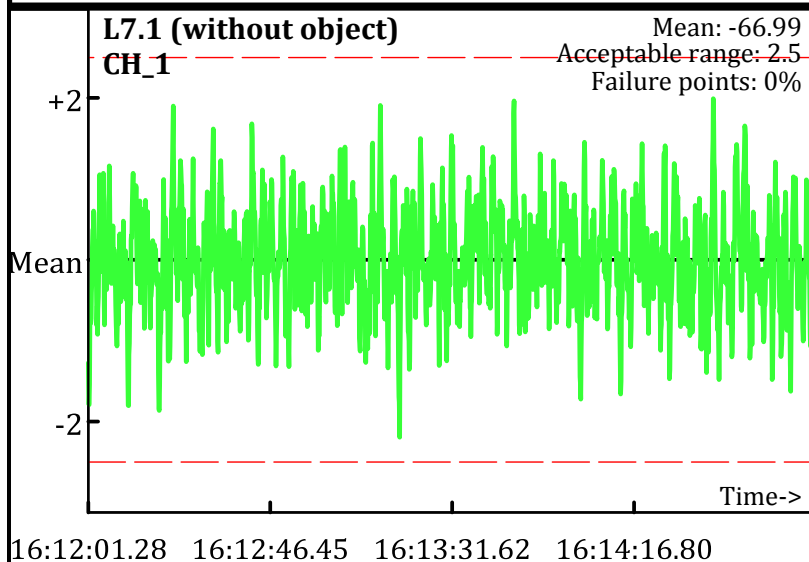Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L7 L8 L9

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
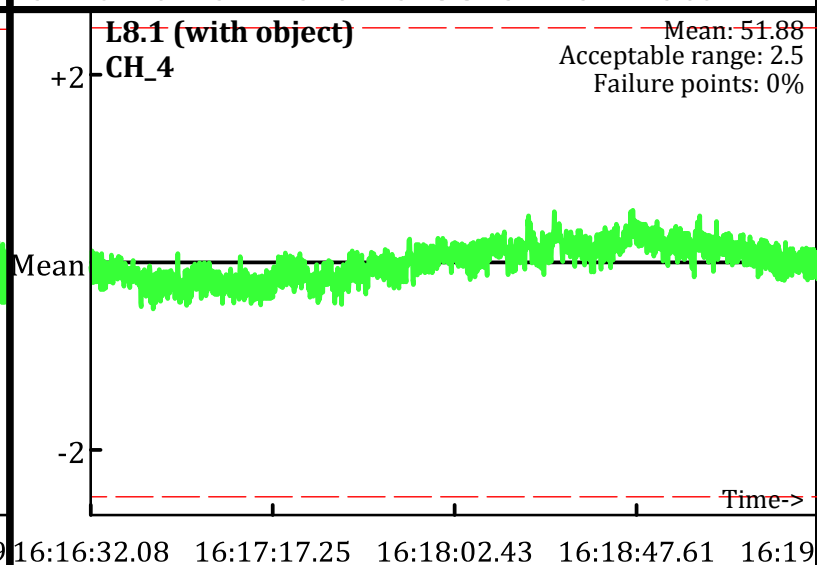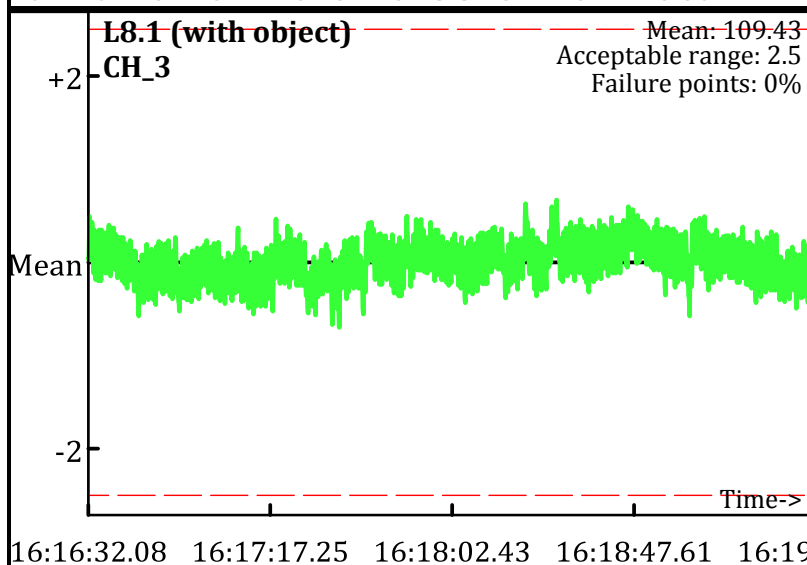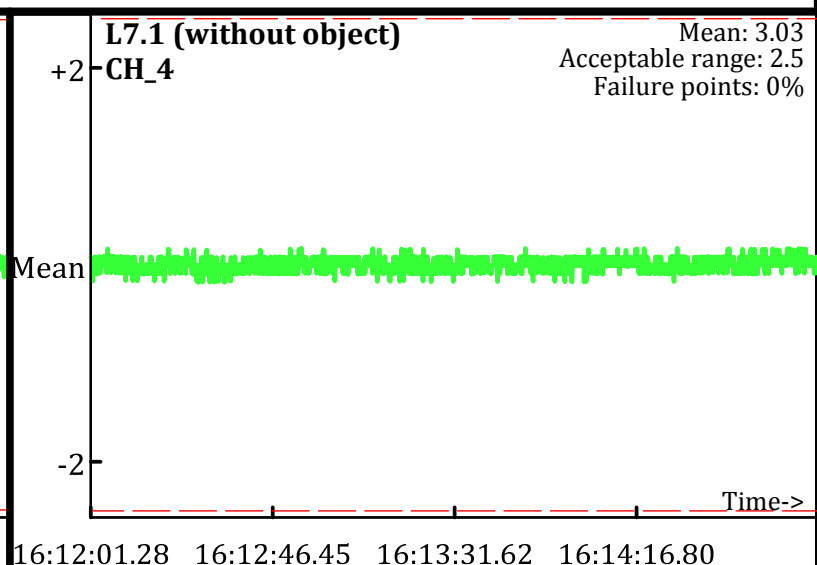Grid/Location: QC Area

⬤ Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/22/2009

L7 (without object)
CH_3
Mean: 6.48
Acceptable range: 2.5
Failure points: 0%

16:12:01.31   16:12:46.49   16:13:31.66   16:14:16.84

L7 (without object)
CH_4
Mean: -1.98
Acceptable range: 2.5
Failure points: 0%

16:12:01.31   16:12:46.49   16:13:31.66   16:14:16.84

L8 (with object)
CH_3
Mean: 111.78
Acceptable range: 2.5
Failure points: 0%

16:16:32.02   16:17:17.21   16:18:02.41   16:18:47.61   16:19

L8 (with object)
CH_4
Mean: 51.66
Acceptable range: 2.5
Failure points: 0%

16:16:32.02   16:17:17.21   16:18:02.41   16:18:47.61   16:19

L9 (without object)
CH_3
Mean: 6.58
Acceptable range: 2.5
Failure points: 0%

16:20:07.80   16:20:22.27   16:20:36.75   16:20:51.23

L9 (without object)
CH_4
Mean: -1.98
Acceptable range: 2.5
Failure points: 0%

16:20:07.80   16:20:22.27   16:20:36.75   16:20:51.23

Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L7 L8 L9

Page: 2

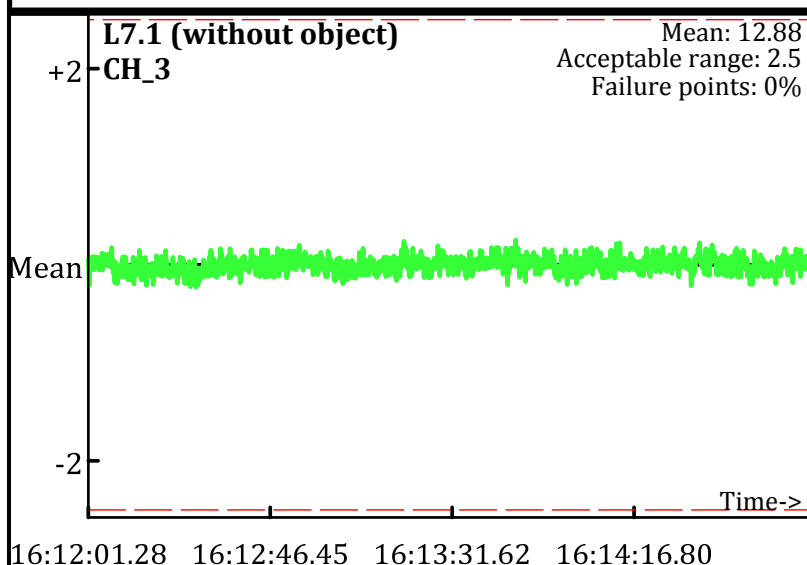# Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits

PM test
Operator: BG & JH
Date: 7/22/2009
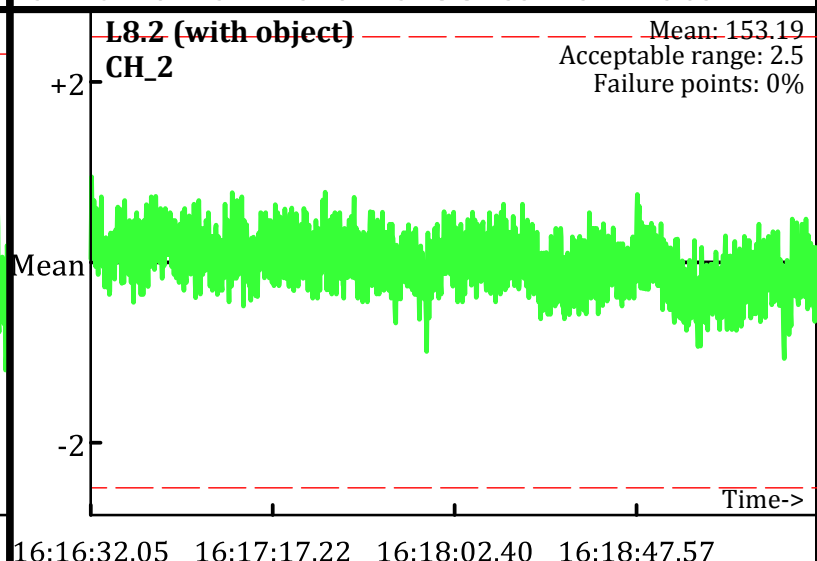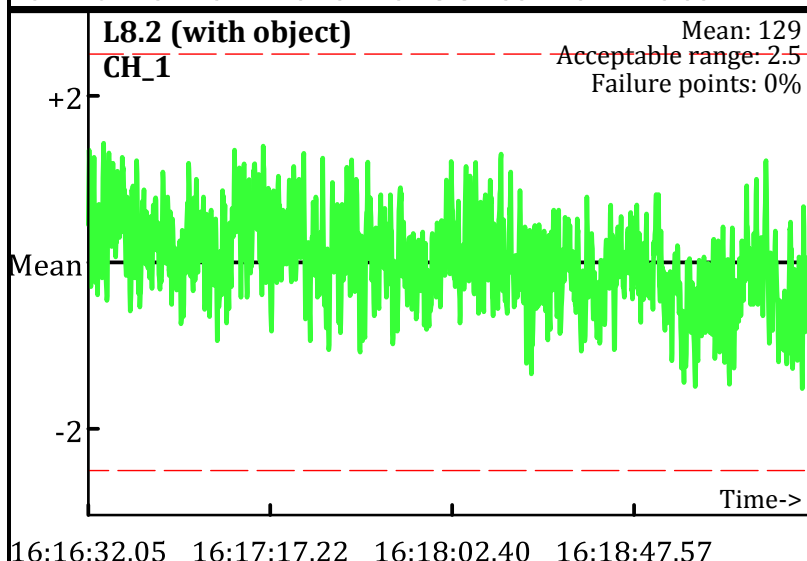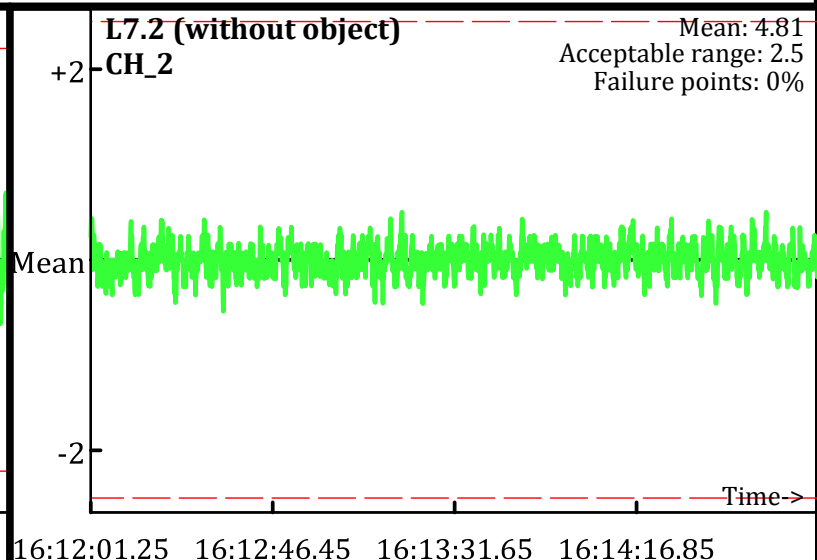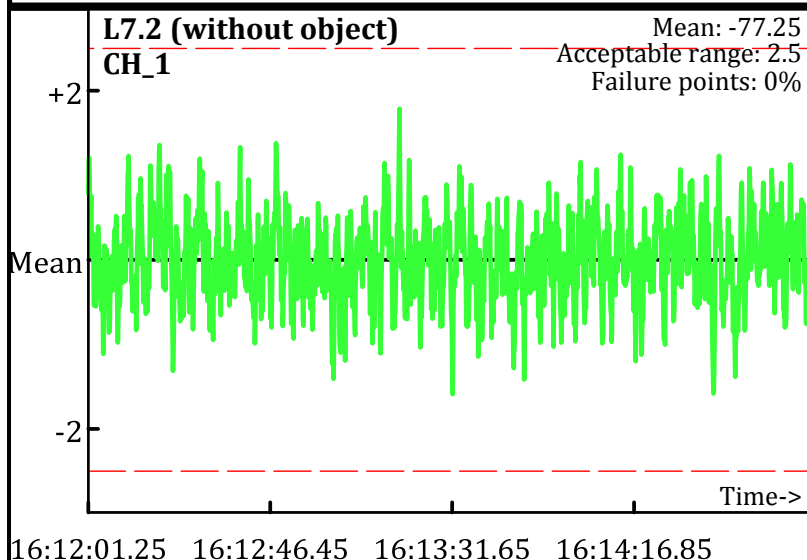
L7.1 (without object)
CH_1
Mean: -66.99
Acceptable range: 2.5
Failure points: 0%

Time->

16:12:01.28   16:12:46.45   16:13:31.62   16:14:16.80

L7.1 (without object)
CH_2
Mean: 8.88
Acceptable range: 2.5
Failure points: 0%

Time->

16:12:01.28   16:12:46.45   16:13:31.62   16:14:16.80

L8.1 (with object)
CH_1
Mean: 151.28
Acceptable range: 2.5
Failure points: 0%

Time->

16:16:32.08   16:17:17.25   16:18:02.43   16:18:47.61   16:19

L8.1 (with object)
CH_2
Mean: 166.87
Acceptable range: 2.5
Failure points: 0%

Time->

16:16:32.08   16:17:17.25   16:18:02.43   16:18:47.61   16:19

L9.1 (without object)
CH_1
Mean: -67.36
Acceptable range: 2.5
Failure points: 0%

Time->

16:20:07.89   16:20:22.34   16:20:36.78   16:20:51.23

L9.1 (without object)
CH_2
Mean: 8.88
Acceptable range: 2.5
Failure points: 0%

Time->

16:20:07.89   16:20:22.34   16:20:36.78   16:20:51.23

Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/22/2009
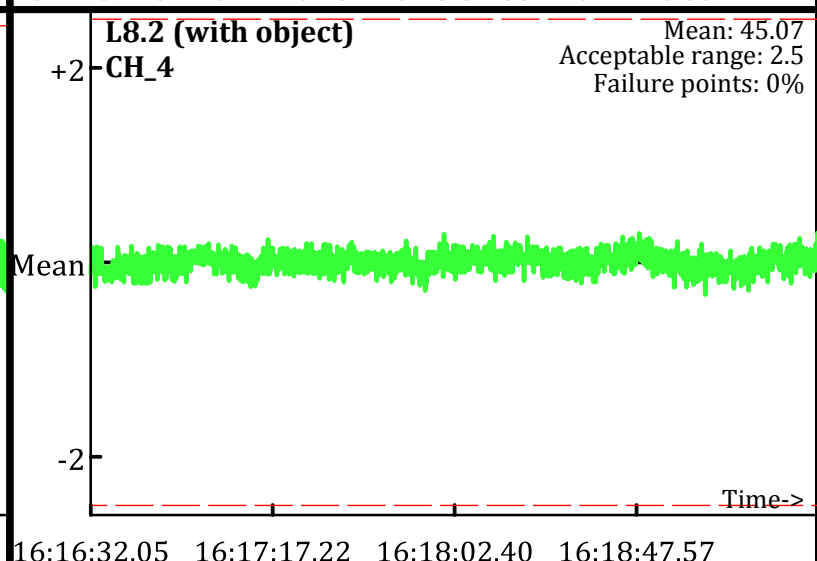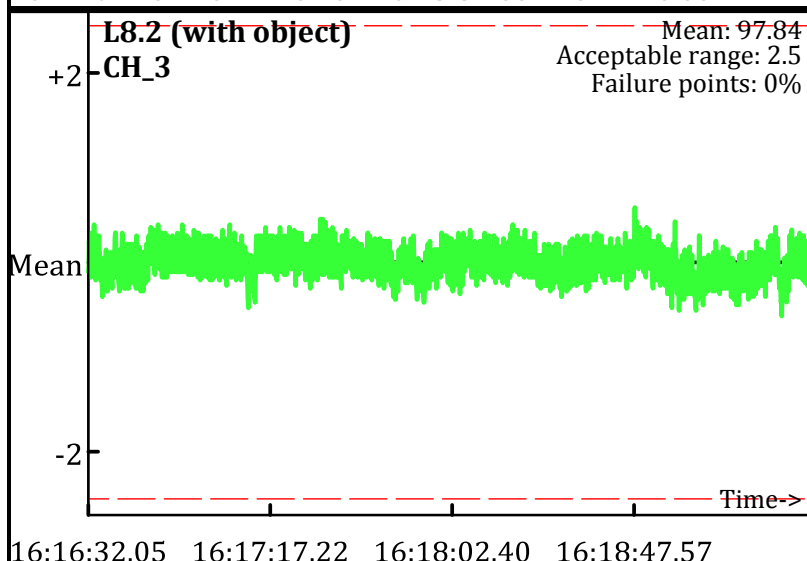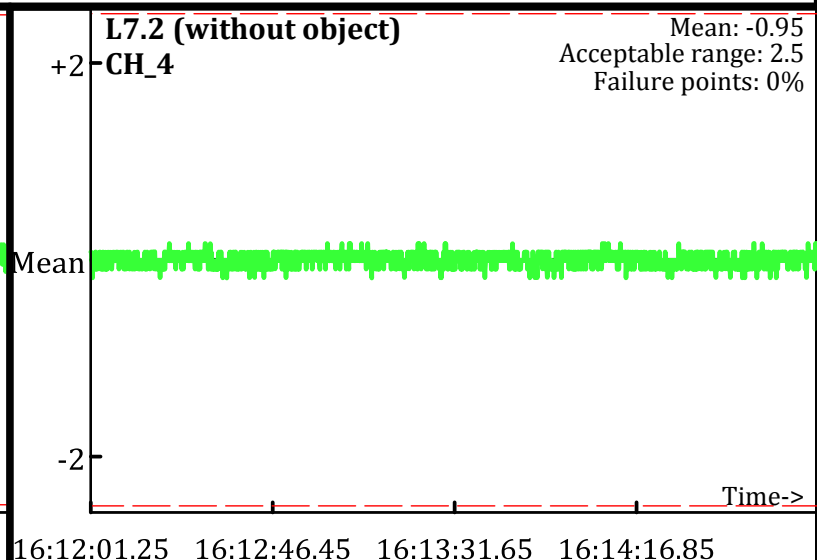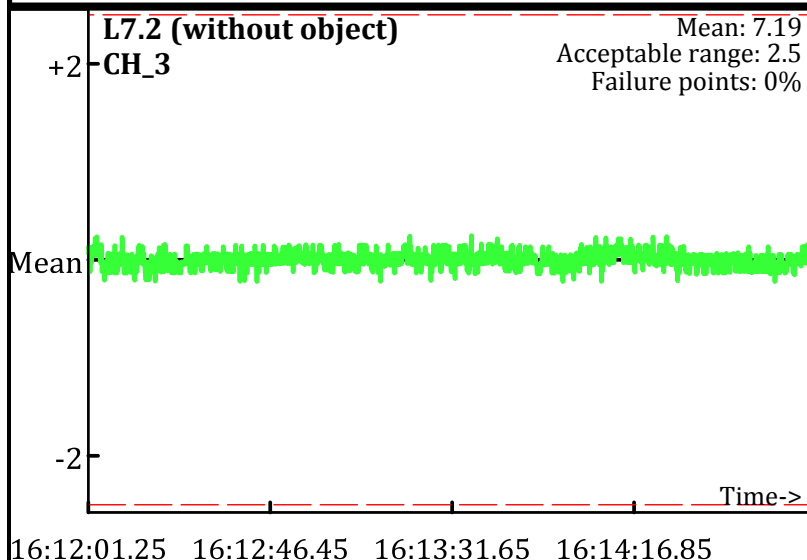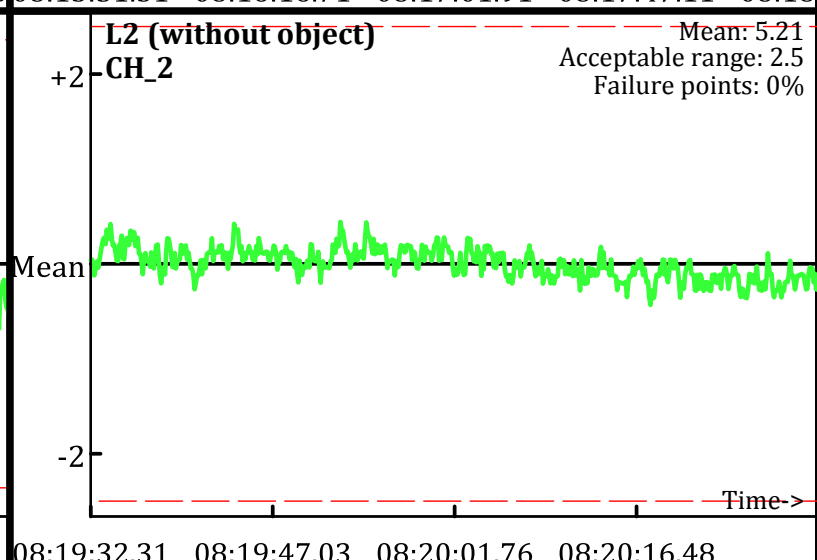
L7.1 (without object)
CH_3
Mean: 12.88
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:12:01.28   16:12:46.45   16:13:31.62   16:14:16.80

L7.1 (without object)
CH_4
Mean: 3.03
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:12:01.28   16:12:46.45   16:13:31.62   16:14:16.80

L8.1 (with object)
CH_3
Mean: 109.43
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:16:32.08   16:17:17.25   16:18:02.43   16:18:47.61   16:19

L8.1 (with object)
CH_4
Mean: 51.88
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:16:32.08   16:17:17.25   16:18:02.43   16:18:47.61   16:19

L9.1 (without object)
CH_3
Mean: 12.94
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:20:07.89   16:20:22.34   16:20:36.78   16:20:51.23

L9.1 (without object)
CH_4
Mean: 3.02
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:20:07.89   16:20:22.34   16:20:36.78   16:20:51.23

Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
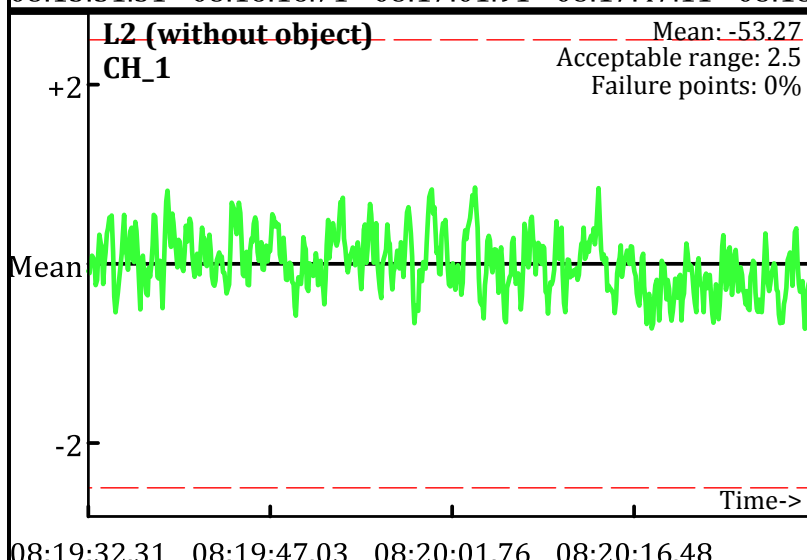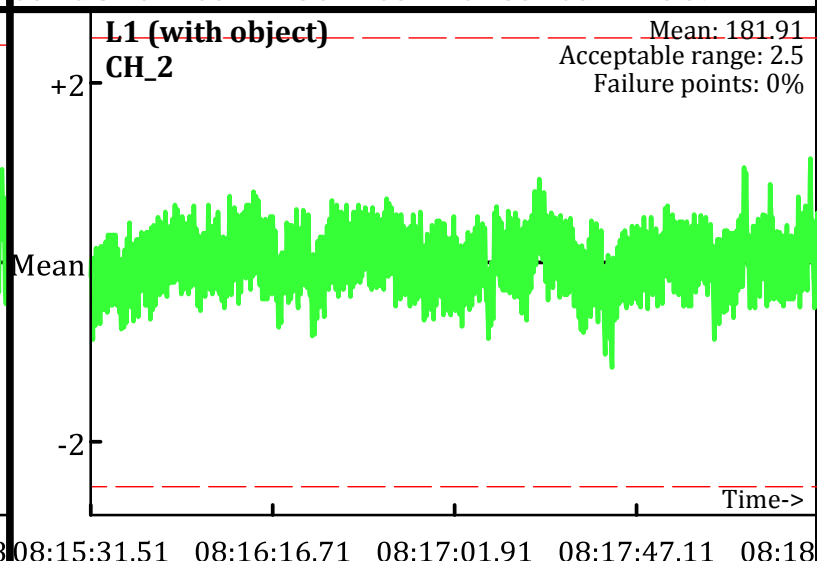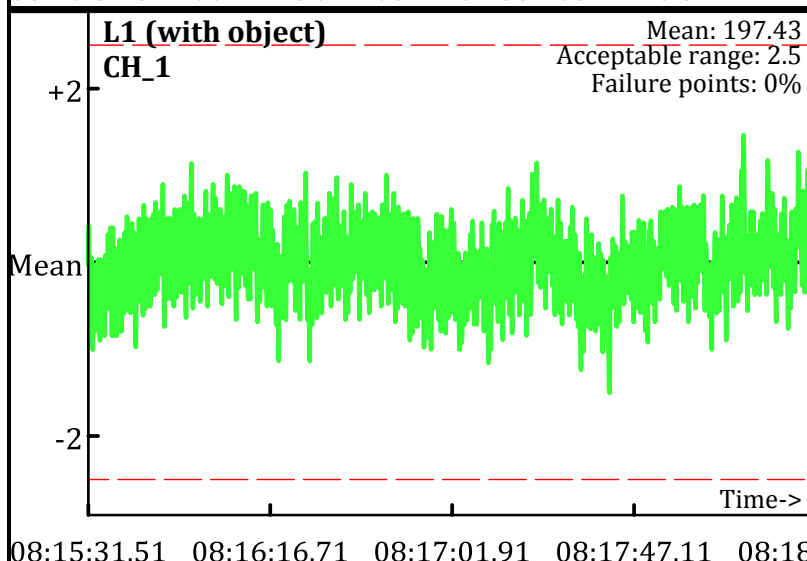– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/22/2009

L7.2 (without object) CH_1
Mean: -77.25
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object) CH_2
Mean: 4.81
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object) CH_1
Mean: 129
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object) CH_2
Mean: 153.19
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object) CH_1
Mean: -77.42
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object) CH_2
Mean: 4.91
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Habitat Trails
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
Operator: BG & JH
Date: 7/22/2009

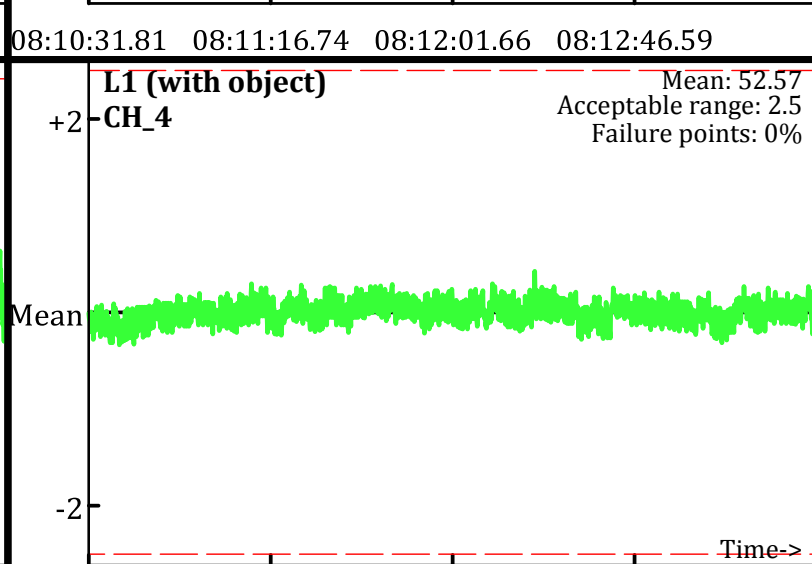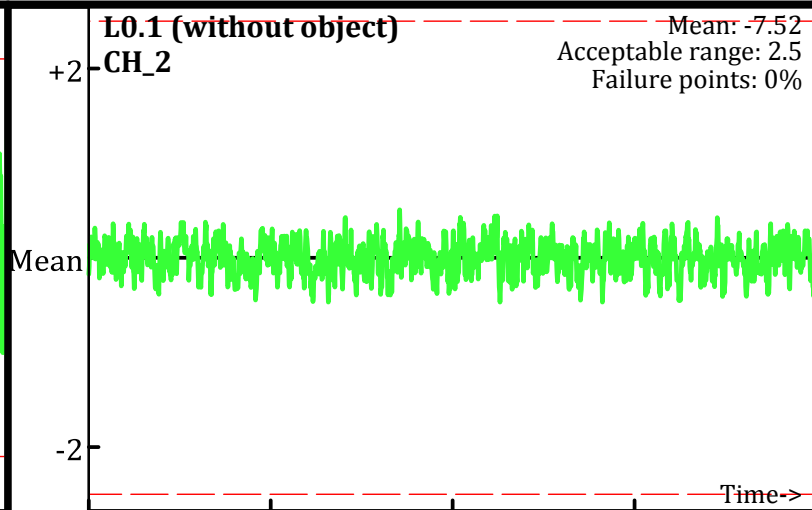**L7.2 (without object)**
CH_3
Mean: 7.19
Acceptable range: 2.5
Failure points: 0%

16:12:01.25   16:12:46.45   16:13:31.65   16:14:16.85

L7.2 (without object)
CH_4
Mean: -0.95
Acceptable range: 2.5
Failure points: 0%

16:12:01.25   16:12:46.45   16:13:31.65   16:14:16.85

L8.2 (with object)
CH_3
Mean: 97.84
Acceptable range: 2.5
Failure points: 0%

16:16:32.05   16:17:17.22   16:18:02.40   16:18:47.57

L8.2 (with object)
CH_4
Mean: 45.07
Acceptable range: 2.5
Failure points: 0%

16:16:32.05   16:17:17.22   16:18:02.40   16:18:47.57

L9.2 (without object)
CH_3
Mean: 7.29
Acceptable range: 2.5
Failure points: 0%

16:20:07.84   16:20:22.30   16:20:36.75   16:20:51.20

L9.2 (without object)
CH_4
Mean: -0.92
Acceptable range: 2.5
Failure points: 0%

16:20:07.84   16:20:22.30   16:20:36.75   16:20:51.20

Database: C:_QCReports_Ord_Data\072209\QC\072209_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 2

Static Calibration Test

● Outside range
– – – Acceptable limits

L0 (without object)
CH_1
Mean: -53.21
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:10:31.81 08:11:16.74 08:12:01.66 08:12:46.59

L0 (without object)
CH_2
Mean: 5.49
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:10:31.81 08:11:16.74 08:12:01.66 08:12:46.59

L1 (with object)
CH_1
Mean: 197.43
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:15:31.51 08:16:16.71 08:17:01.91 08:17:47.11 08:18

L1 (with object)
CH_2
Mean: 181.91
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:15:31.51 08:16:16.71 08:17:01.91 08:17:47.11 08:18

L2 (without object)
CH_1
Mean: -53.27
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:19:32.31 08:19:47.03 08:20:01.76 08:20:16.48

L2 (without object)
CH_2
Mean: 5.21
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:19:32.31 08:19:47.03 08:20:01.76 08:20:16.48

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/23/2009
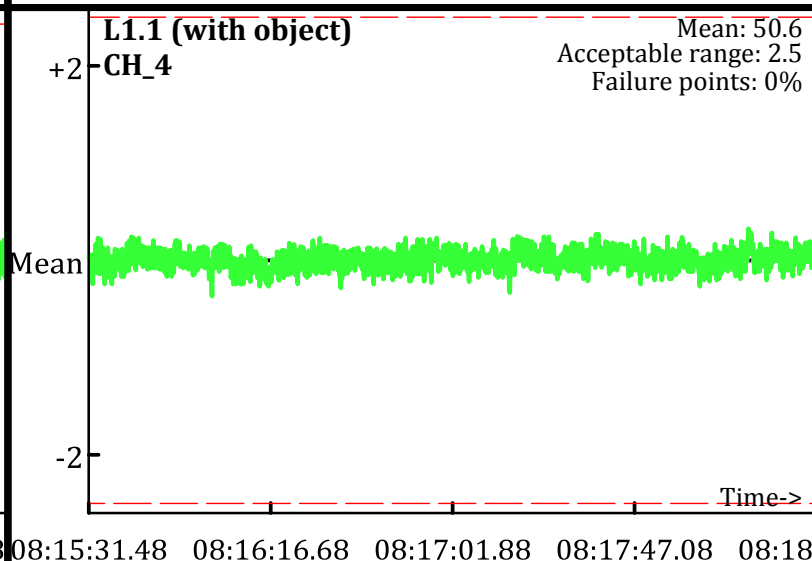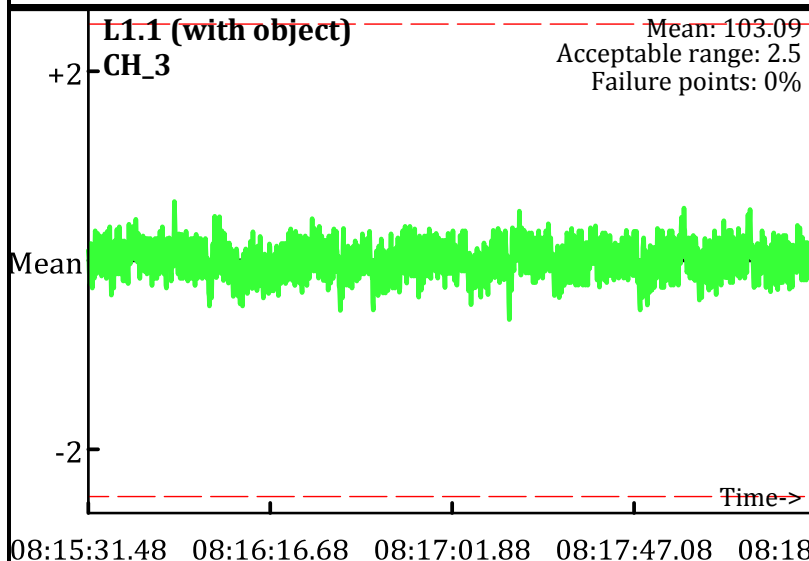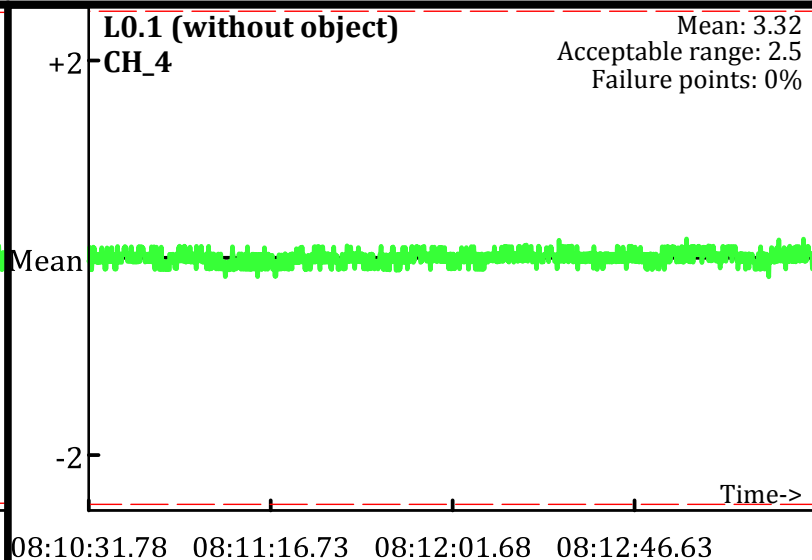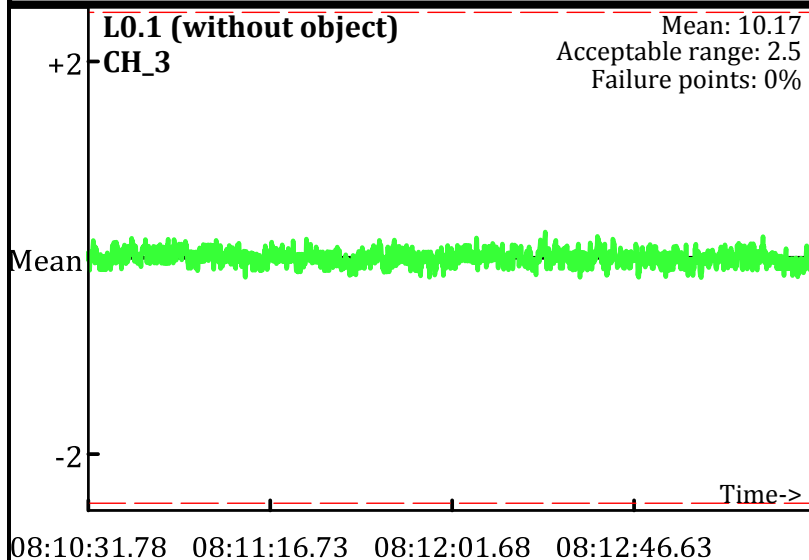
L0 (without object)
CH_3
Mean: 6.92
Acceptable range: 2.5
Failure points: 0%

Time->

08:10:31.81   08:11:16.74   08:12:01.66   08:12:46.59

L0 (without object)
CH_4
Mean: -0.84
Acceptable range: 2.5
Failure points: 0%

Time->

08:10:31.81   08:11:16.74   08:12:01.66   08:12:46.59

L1 (with object)
CH_3
Mean: 113.12
Acceptable range: 2.5
Failure points: 0%

Time->

08:15:31.51   08:16:16.71   08:17:01.91   08:17:47.11   08:18

L1 (with object)
CH_4
Mean: 52.57
Acceptable range: 2.5
Failure points: 0%

Time->

08:15:31.51   08:16:16.71   08:17:01.91   08:17:47.11   08:18

L2 (without object)
CH_3
Mean: 6.7
Acceptable range: 2.5
Failure points: 0%

Time->

08:19:32.31   08:19:47.03   08:20:01.76   08:20:16.48

L2 (without object)
CH_4
Mean: -1.11
Acceptable range: 2.5
Failure points: 0%

Time->

08:19:32.31   08:19:47.03   08:20:01.76   08:20:16.48

Static Calibration Test

Project: Fort Ord Parker Flats - Development Areas
Equipment: EM-61 Mark II
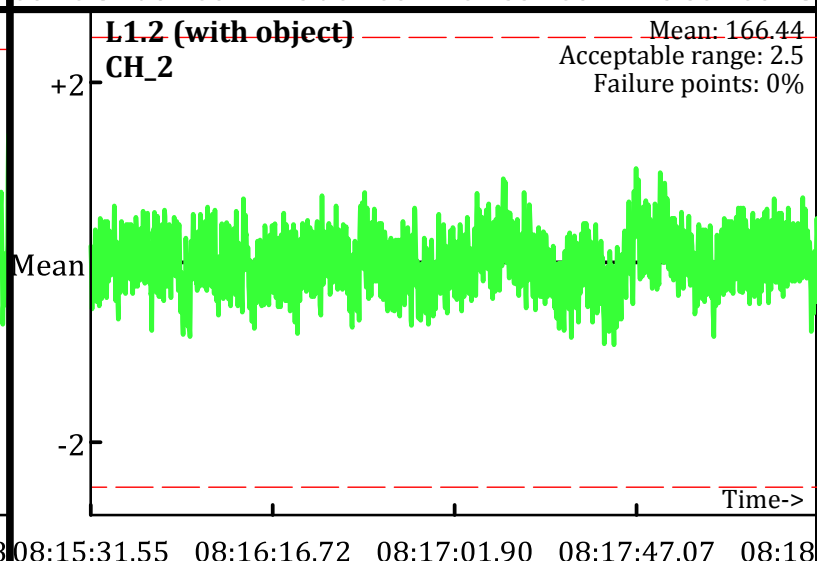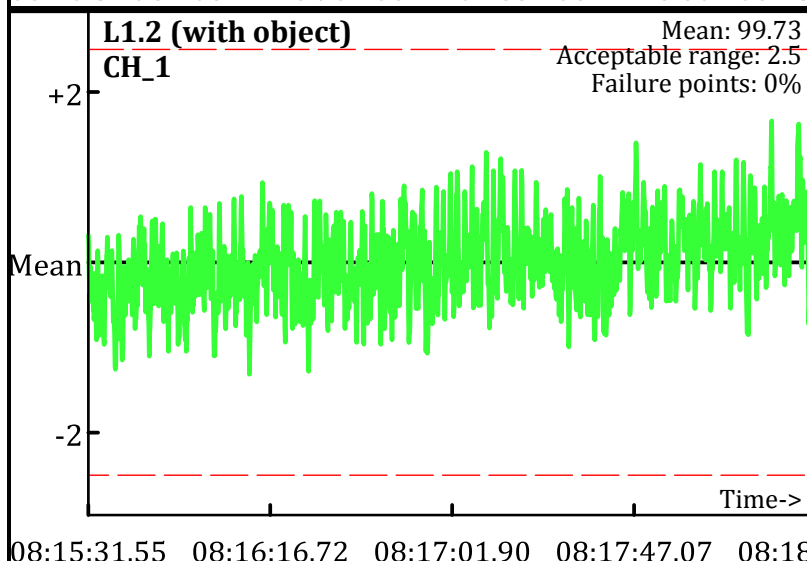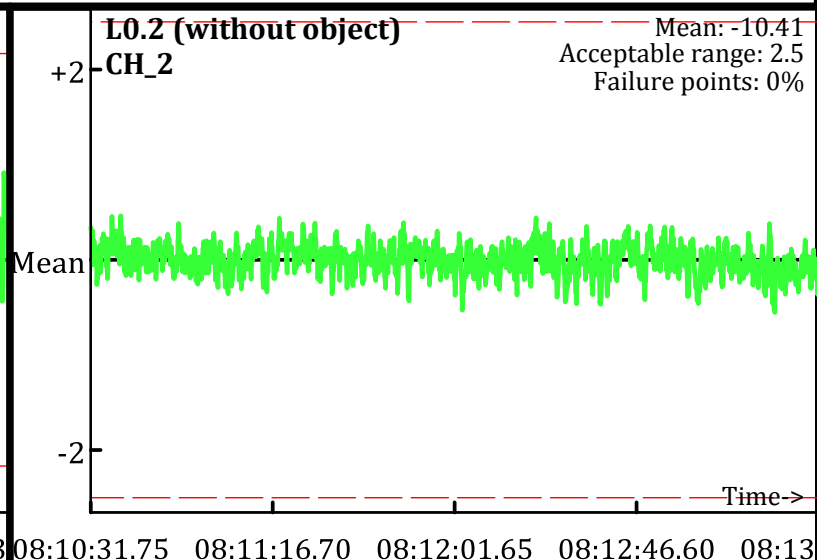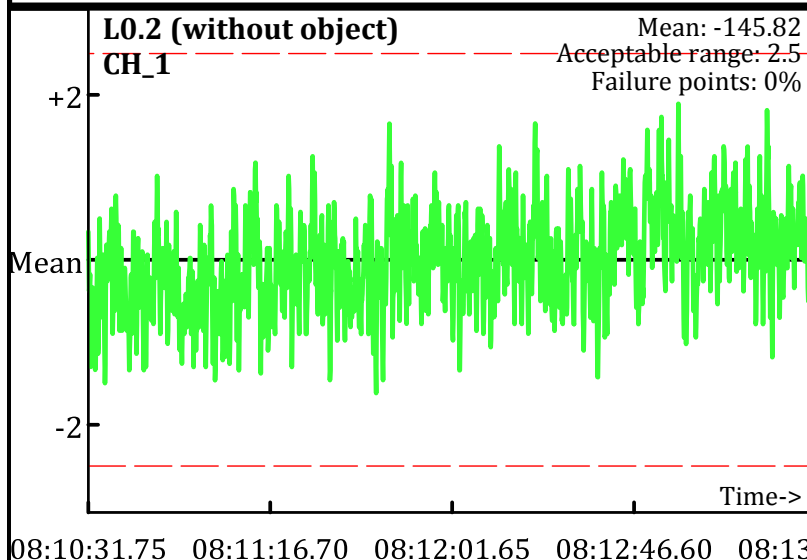Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/23/2009

L0.1 (without object) — CH_1 — Mean: -126.87 — Acceptable range: 2.5 — Failure points: 0%

L0.1 (without object) — CH_2 — Mean: -7.52 — Acceptable range: 2.5 — Failure points: 0%

Time axis (L0.1): 08:10:31.78 — 08:11:16.73 — 08:12:01.68 — 08:12:46.63

L1.1 (with object) — CH_1 — Mean: 84.61 — Acceptable range: 2.5 — Failure points: 0%

L1.1 (with object) — CH_2 — Mean: 144.47 — Acceptable range: 2.5 — Failure points: 0%

Time axis (L1.1): 08:15:31.48 — 08:16:16.68 — 08:17:01.88 — 08:17:47.08 — 08:18

L2.1 (without object) — CH_1 — Mean: -125.67 — Acceptable range: 2.5 — Failure points: 0%

L2.1 (without object) — CH_2 — Mean: -7.43 — Acceptable range: 2.5 — Failure points: 0%

Time axis (L2.1): 08:19:32.28 — 08:19:47.01 — 08:20:01.73 — 08:20:16.46

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
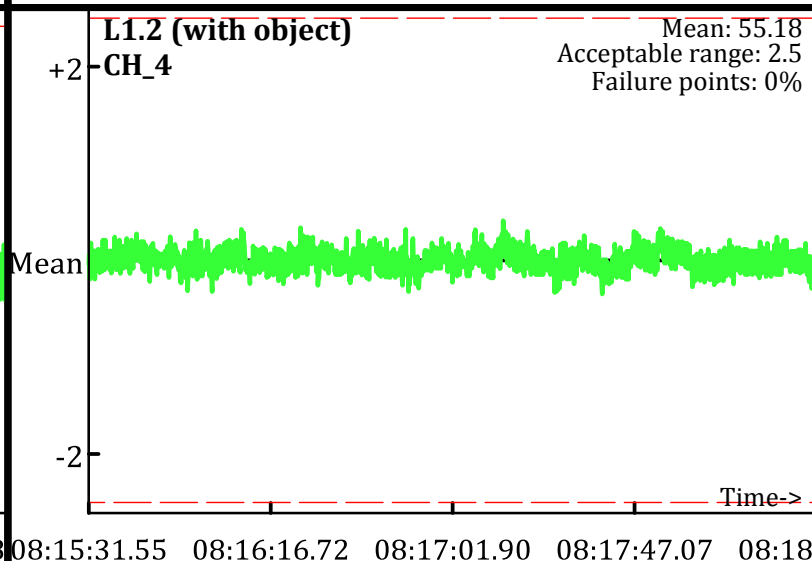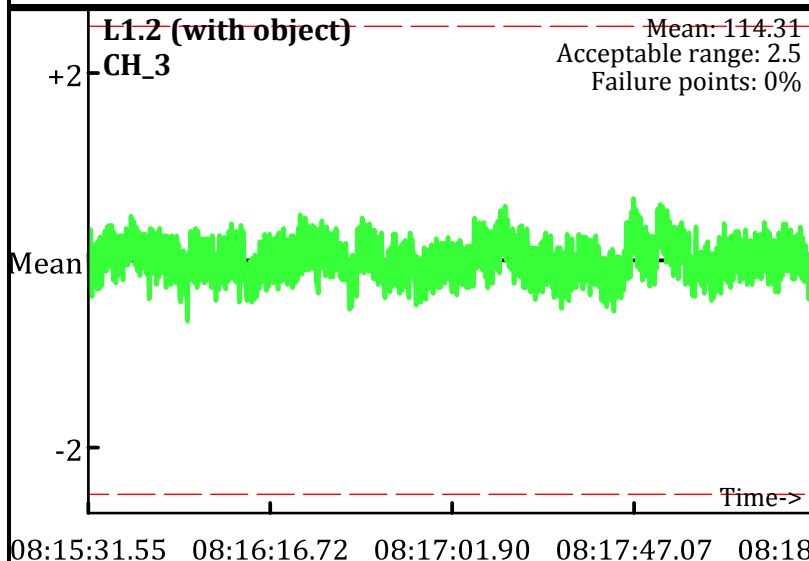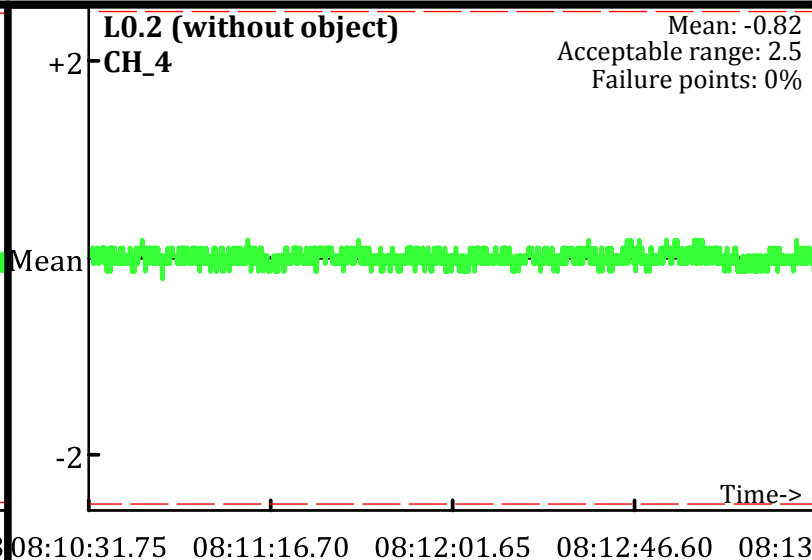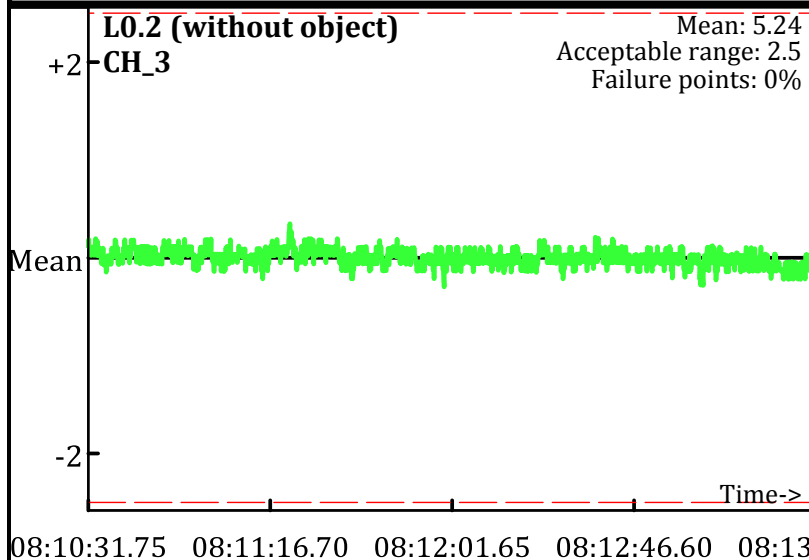Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/23/2009

L0.1 (without object)
CH_3
Mean: 10.17
Acceptable range: 2.5
Failure points: 0%
Time->
08:10:31.78   08:11:16.73   08:12:01.68   08:12:46.63

L0.1 (without object)
CH_4
Mean: 3.32
Acceptable range: 2.5
Failure points: 0%
Time->
08:10:31.78   08:11:16.73   08:12:01.68   08:12:46.63

L1.1 (with object)
CH_3
Mean: 103.09
Acceptable range: 2.5
Failure points: 0%
Time->
08:15:31.48   08:16:16.68   08:17:01.88   08:17:47.08   08:18

L1.1 (with object)
CH_4
Mean: 50.6
Acceptable range: 2.5
Failure points: 0%
Time->
08:15:31.48   08:16:16.68   08:17:01.88   08:17:47.08   08:18

L2.1 (without object)
CH_3
Mean: 10.2
Acceptable range: 2.5
Failure points: 0%
Time->
08:19:32.28   08:19:47.01   08:20:01.73   08:20:16.46

L2.1 (without object)
CH_4
Mean: 3.35
Acceptable range: 2.5
Failure points: 0%
Time->
08:19:32.28   08:19:47.01   08:20:01.73   08:20:16.46

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
- - - Acceptable limits

AM test
Operator: BG & JH
Date: 7/23/2009
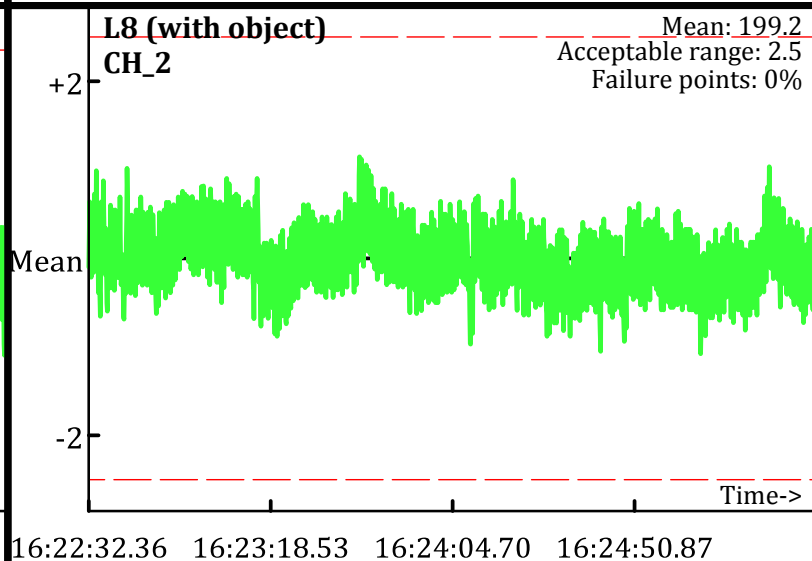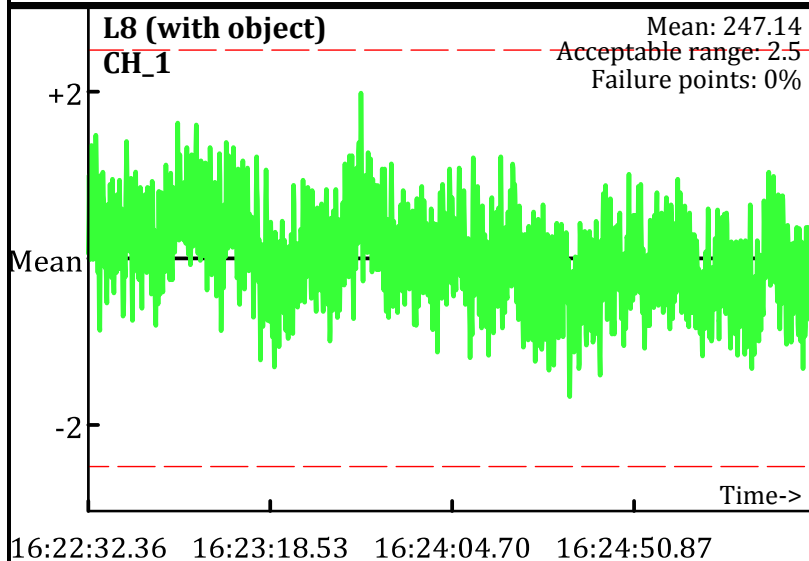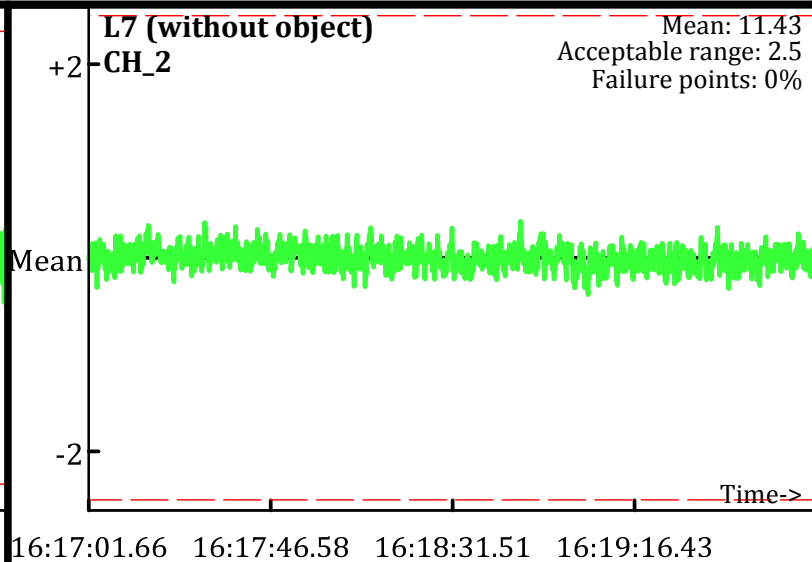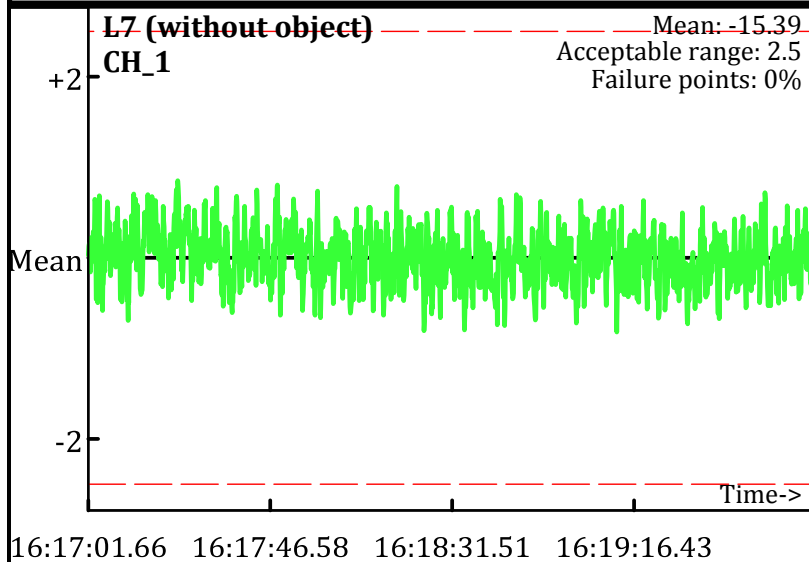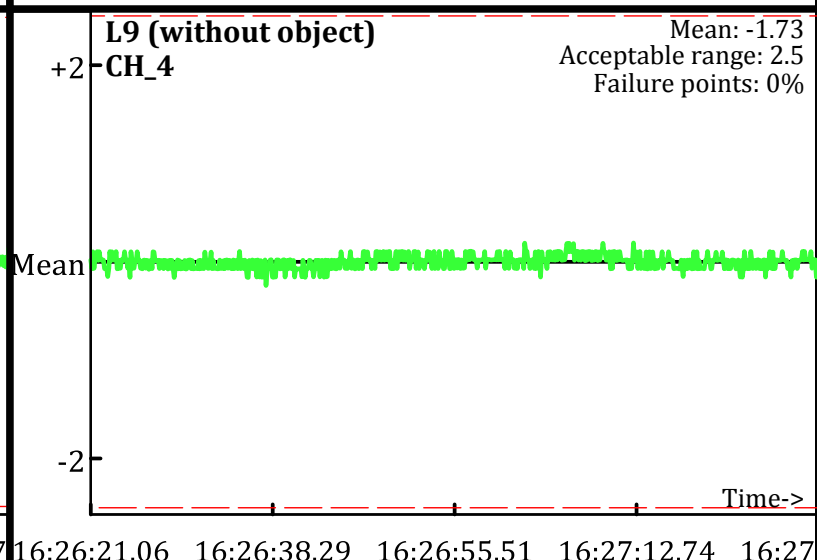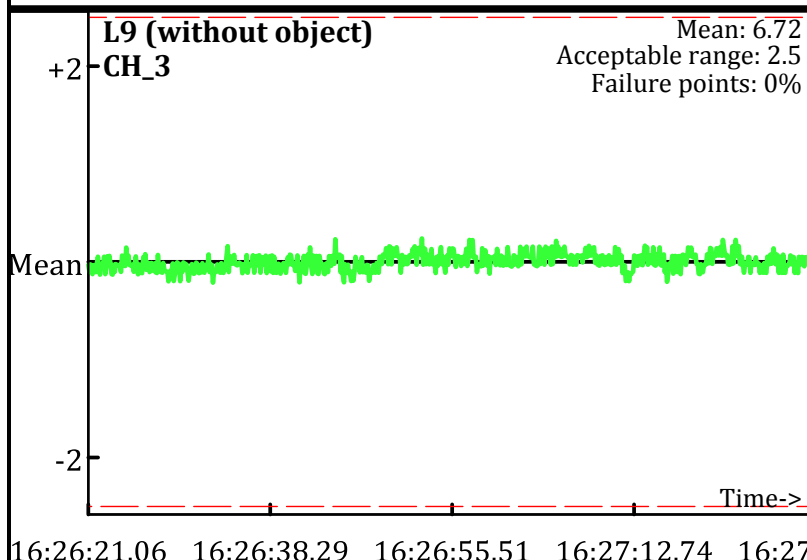

L0.2 (without object)
CH_1
Mean: -145.82
Acceptable range: 2.5
Failure points: 0%

08:10:31.75   08:11:16.70   08:12:01.65   08:12:46.60   08:13

L0.2 (without object)
CH_2
Mean: -10.41
Acceptable range: 2.5
Failure points: 0%

08:10:31.75   08:11:16.70   08:12:01.65   08:12:46.60   08:13

L1.2 (with object)
CH_1
Mean: 99.73
Acceptable range: 2.5
Failure points: 0%

08:15:31.55   08:16:16.72   08:17:01.90   08:17:47.07   08:18

L1.2 (with object)
CH_2
Mean: 166.44
Acceptable range: 2.5
Failure points: 0%

08:15:31.55   08:16:16.72   08:17:01.90   08:17:47.07   08:18

L2.2 (without object)
CH_1
Mean: -143.89
Acceptable range: 2.5
Failure points: 0%

08:19:32.34   08:19:47.05   08:20:01.75   08:20:16.45

L2.2 (without object)
CH_2
Mean: -10.48
Acceptable range: 2.5
Failure points: 0%

08:19:32.34   08:19:47.05   08:20:01.75   08:20:16.45

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
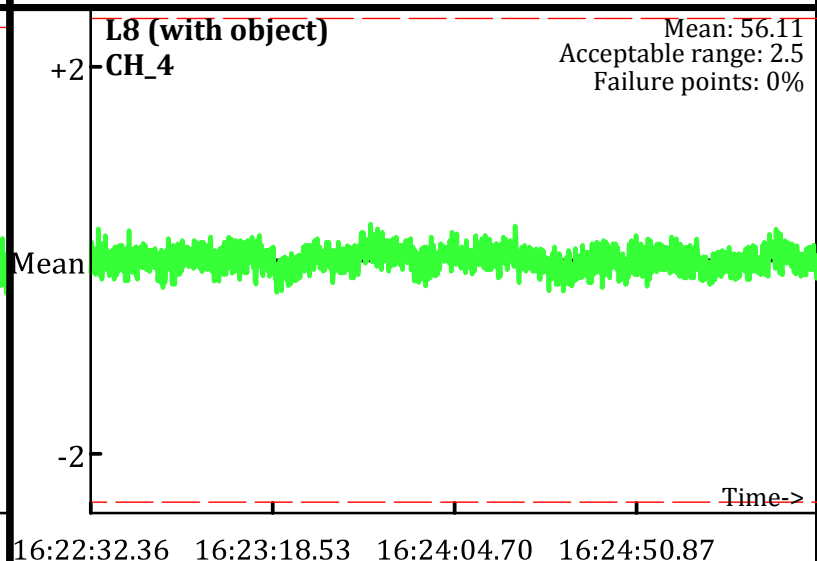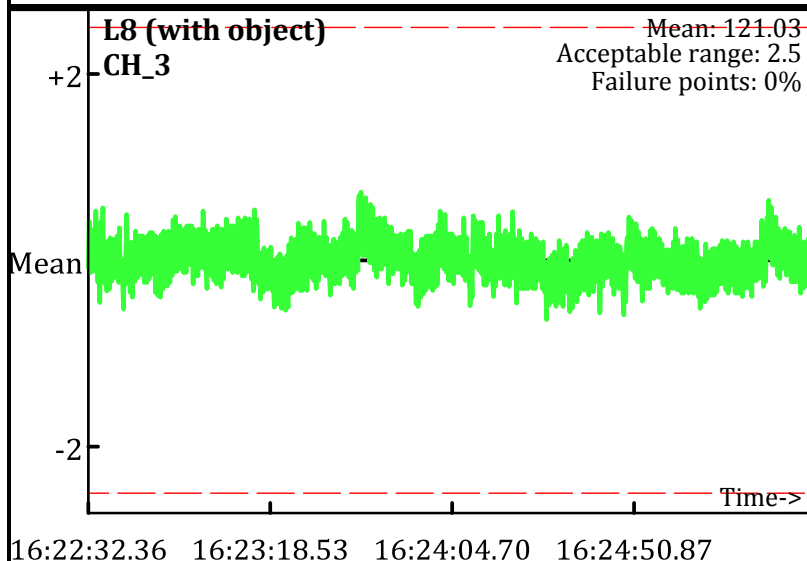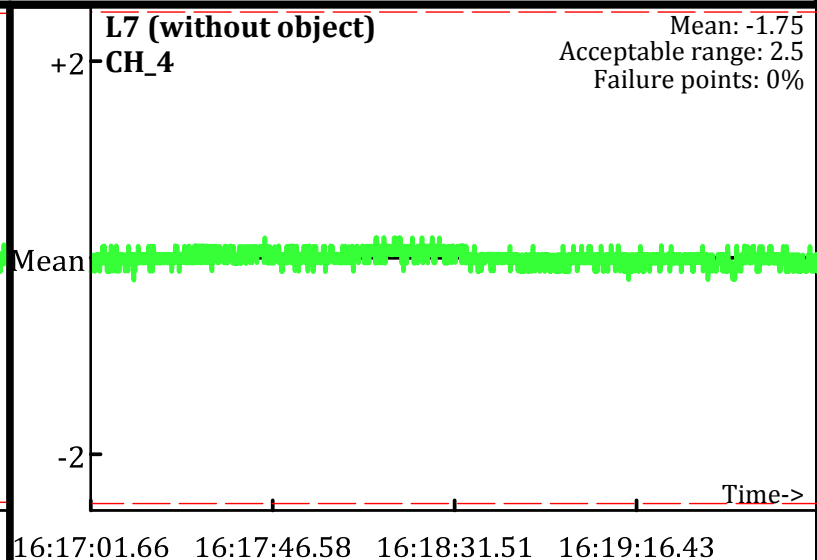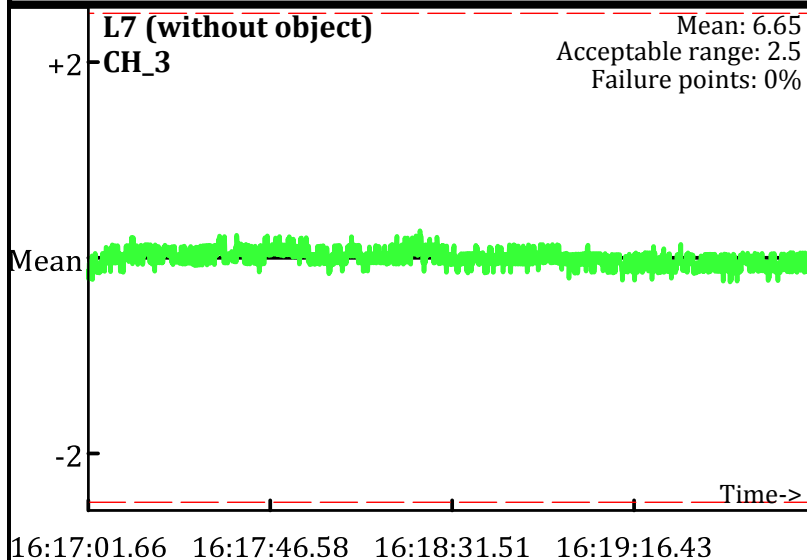Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & JH
Date: 7/23/2009

L0.2 (without object)
CH_3

Mean: 5.24
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_4

Mean: -0.82
Acceptable range: 2.5
Failure points: 0%

08:10:31.75   08:11:16.70   08:12:01.65   08:12:46.60   08:13
08:10:31.75   08:11:16.70   08:12:01.65   08:12:46.60   08:13

L1.2 (with object)
CH_3

Mean: 114.31
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_4

Mean: 55.18
Acceptable range: 2.5
Failure points: 0%

08:15:31.55   08:16:16.72   08:17:01.90   08:17:47.07   08:18
08:15:31.55   08:16:16.72   08:17:01.90   08:17:47.07   08:18

L2.2 (without object)
CH_3

Mean: 5.02
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_4

Mean: -0.88
Acceptable range: 2.5
Failure points: 0%

08:19:32.34   08:19:47.05   08:20:01.75   08:20:16.45
08:19:32.34   08:19:47.05   08:20:01.75   08:20:16.45

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
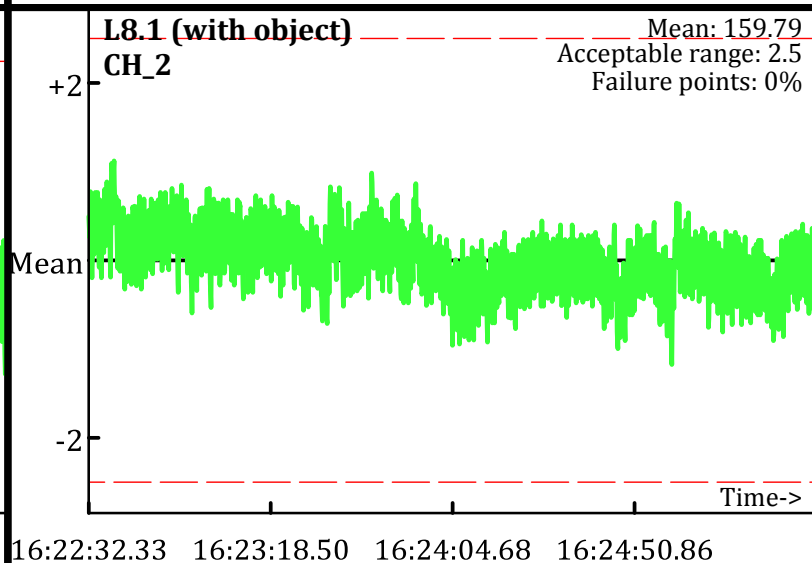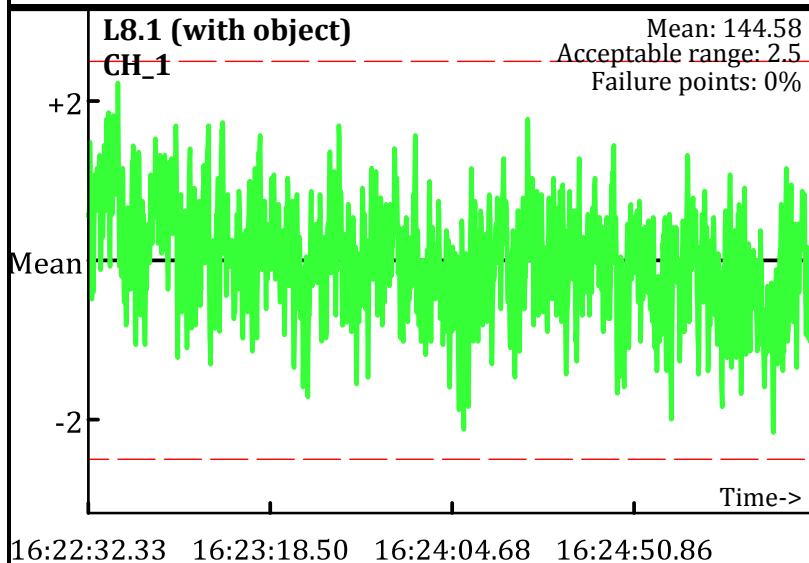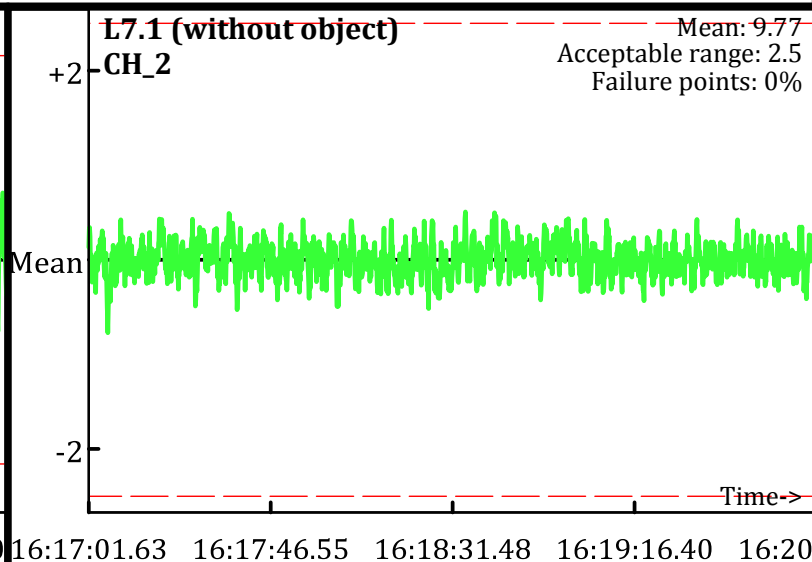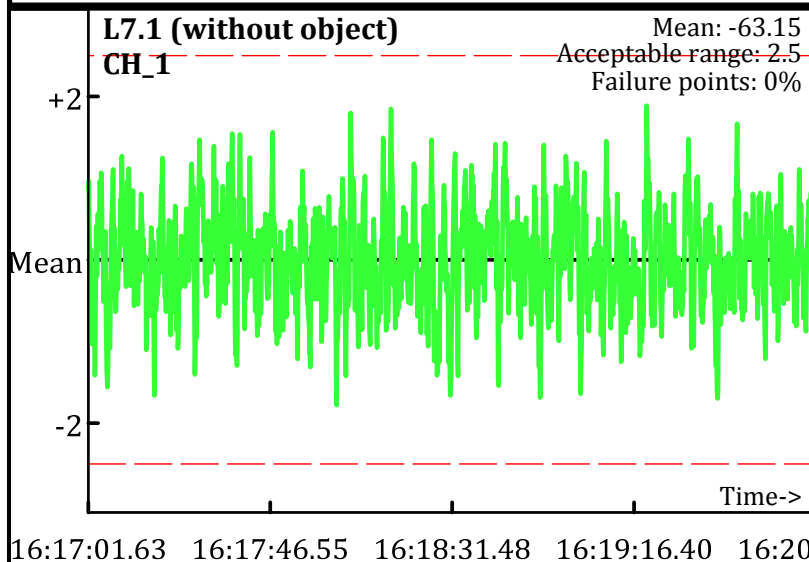Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
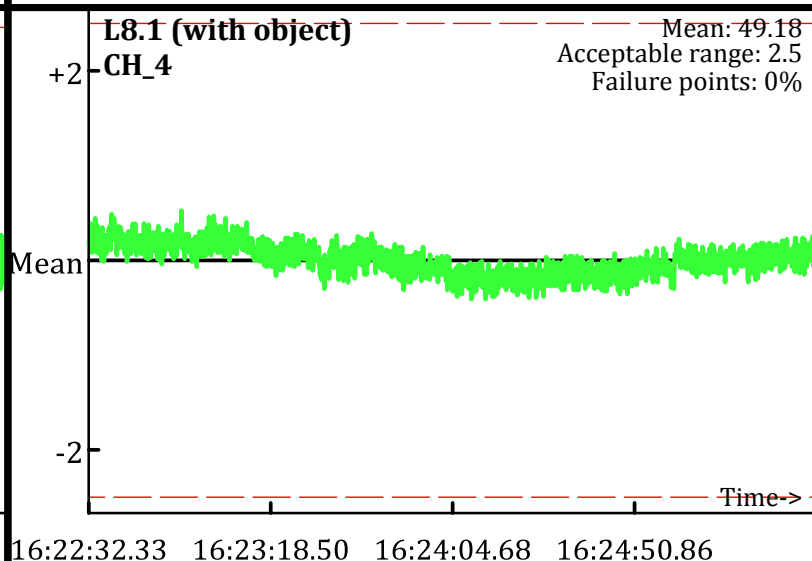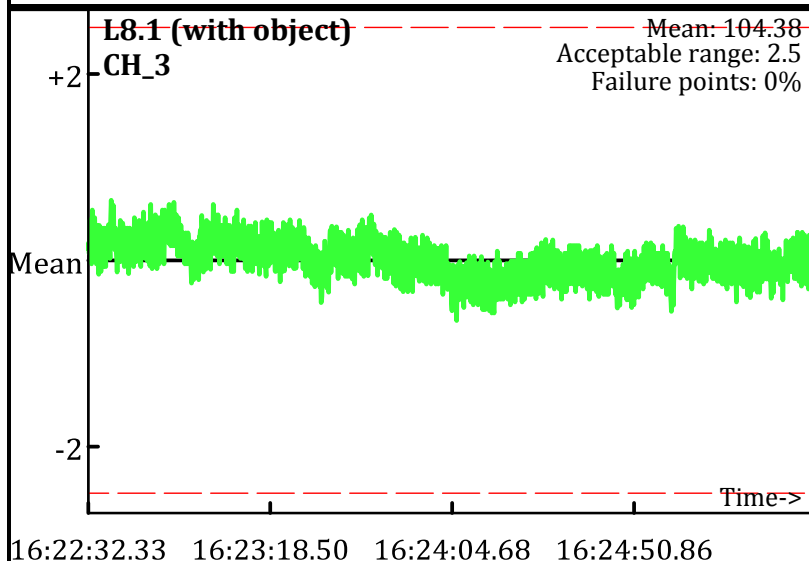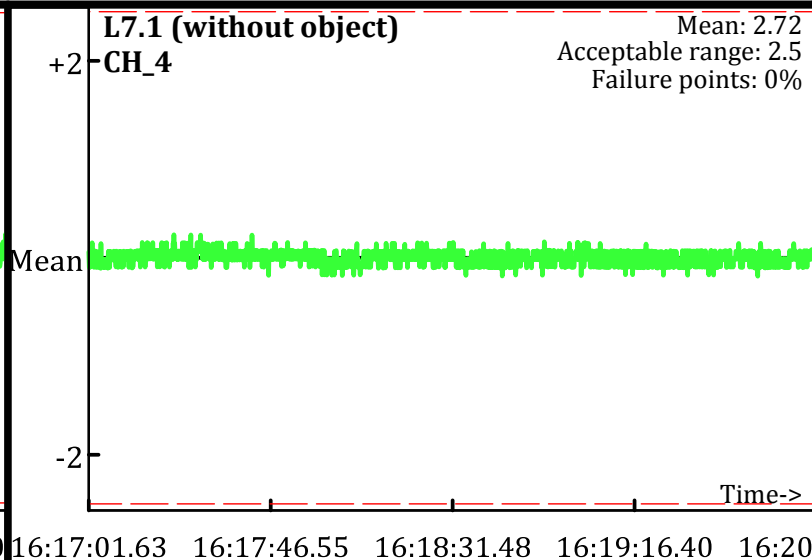Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/23/2009

L7 (without object)
CH_1
Mean: -15.39
Acceptable range: 2.5
Failure points: 0%

L7 (without object)
CH_2
Mean: 11.43
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_1
Mean: 247.14
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_2
Mean: 199.2
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
CH_1
Mean: -15.47
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
CH_2
Mean: 11.47
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
Line Name: L7 L8 L9

Page: 1

Static Calibration Test

🔴 Outside range
– – – Acceptable limits

L7 (without object)
CH_3
+2
Mean: 6.65
Acceptable range: 2.5
Failure points: 0%
Mean
-2
Time->
16:17:01.66   16:17:46.58   16:18:31.51   16:19:16.43

L7 (without object)
CH_4
+2
Mean: -1.75
Acceptable range: 2.5
Failure points: 0%
Mean
-2
Time->
16:17:01.66   16:17:46.58   16:18:31.51   16:19:16.43

L8 (with object)
CH_3
+2
Mean: 121.03
Acceptable range: 2.5
Failure points: 0%
Mean
-2
Time->
16:22:32.36   16:23:18.53   16:24:04.70   16:24:50.87

L8 (with object)
CH_4
+2
Mean: 56.11
Acceptable range: 2.5
Failure points: 0%
Mean
-2
Time->
16:22:32.36   16:23:18.53   16:24:04.70   16:24:50.87

L9 (without object)
CH_3
+2
Mean: 6.72
Acceptable range: 2.5
Failure points: 0%
Mean
-2
Time->
16:26:21.06   16:26:38.29   16:26:55.51   16:27:12.74   16:27

L9 (without object)
CH_4
+2
Mean: -1.73
Acceptable range: 2.5
Failure points: 0%
Mean
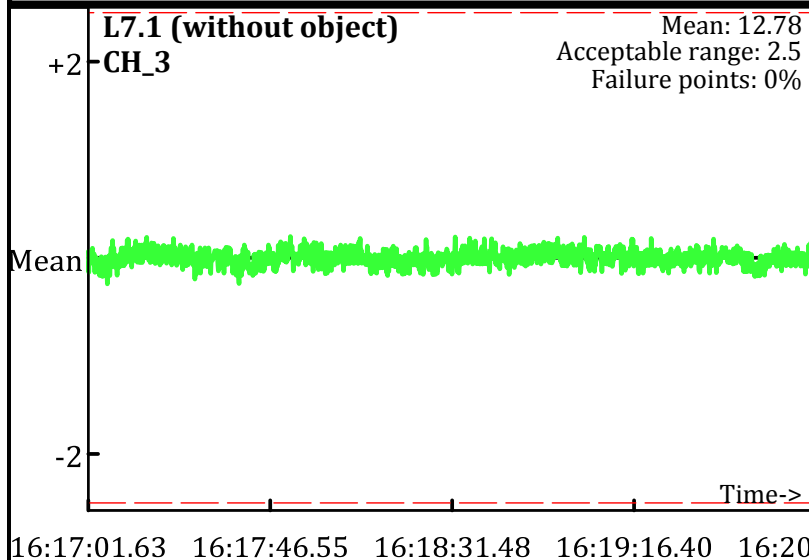-2
Time->
16:26:21.06   16:26:38.29   16:26:55.51   16:27:12.74   16:27

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
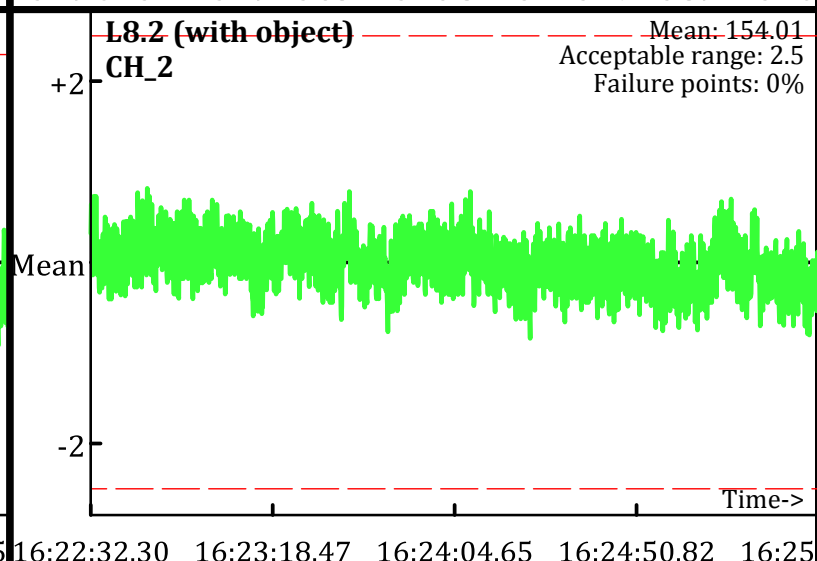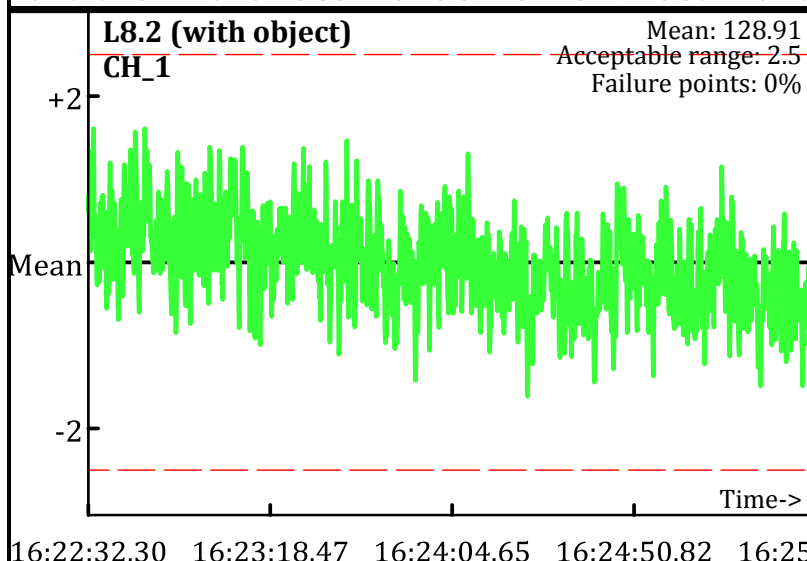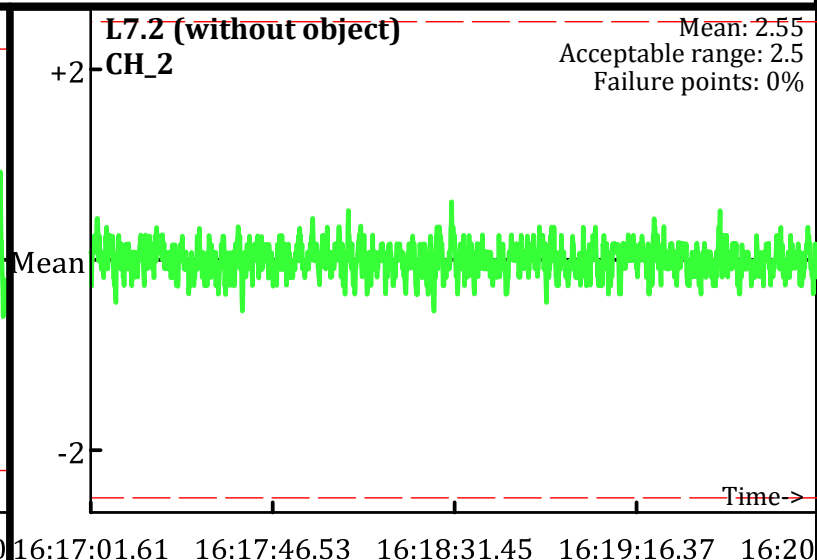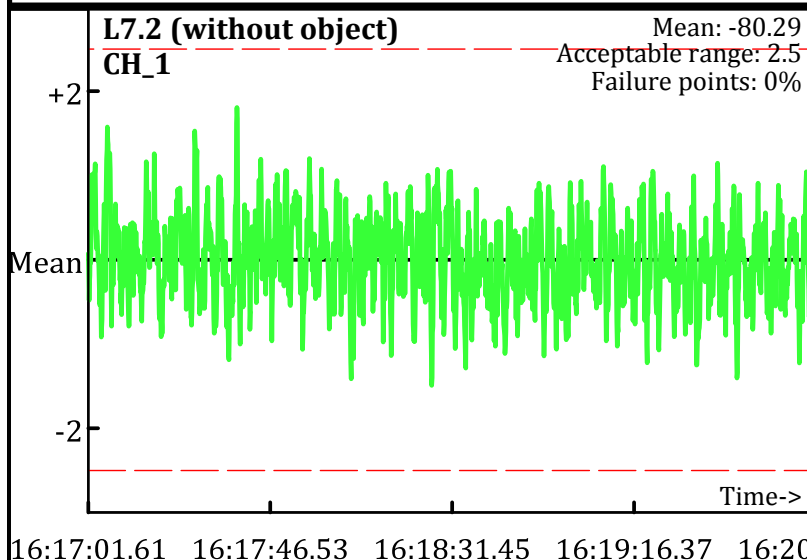Grid/Location: QC Area

● Outside range
— — Acceptable limits

PM test
Operator: BG & JH
Date: 7/23/2009

L7.1 (without object)
CH_1
Mean: -63.15
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_2
Mean: 9.77
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object)
CH_1
Mean: 144.58
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object)
CH_2
Mean: 159.79
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_1
Mean: -63.55
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_2
Mean: 9.86
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & JH
Date: 7/23/2009
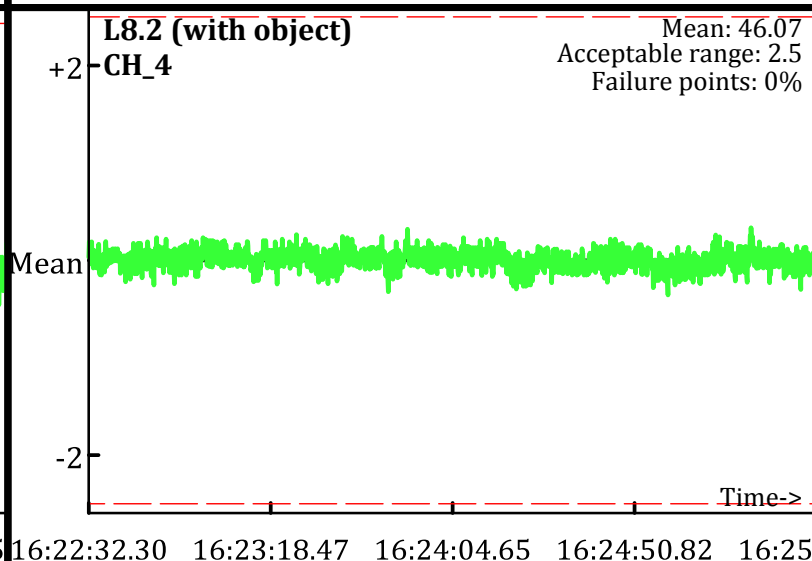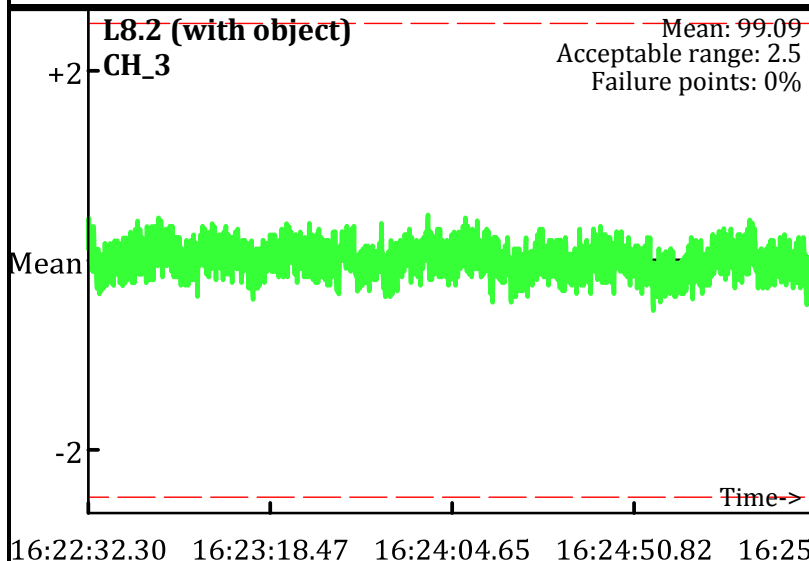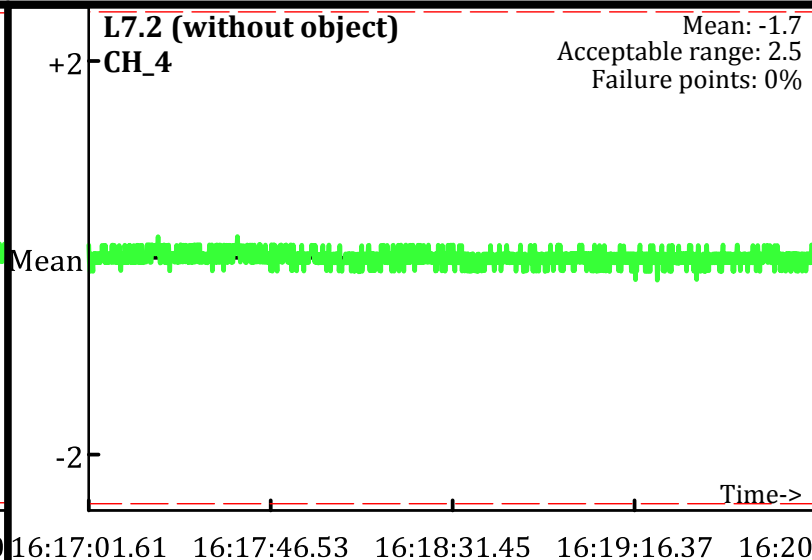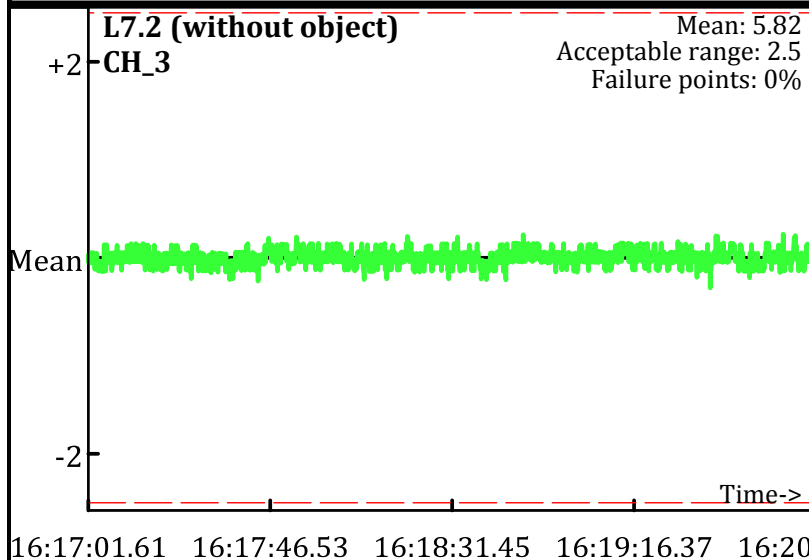
L7.1 (without object)
CH_3

Mean: 12.78
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:01.63   16:17:46.55   16:18:31.48   16:19:16.40   16:20

L7.1 (without object)
CH_4

Mean: 2.72
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:17:01.63   16:17:46.55   16:18:31.48   16:19:16.40   16:20

L8.1 (with object)
CH_3

Mean: 104.38
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:22:32.33   16:23:18.50   16:24:04.68   16:24:50.86

L8.1 (with object)
CH_4

Mean: 49.18
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:22:32.33   16:23:18.50   16:24:04.68   16:24:50.86

L9.1 (without object)
CH_3

Mean: 12.99
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:26:21.13   16:26:38.32   16:26:55.52   16:27:12.72

L9.1 (without object)
CH_4

Mean: 2.92
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:26:21.13   16:26:38.32   16:26:55.52   16:27:12.72

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
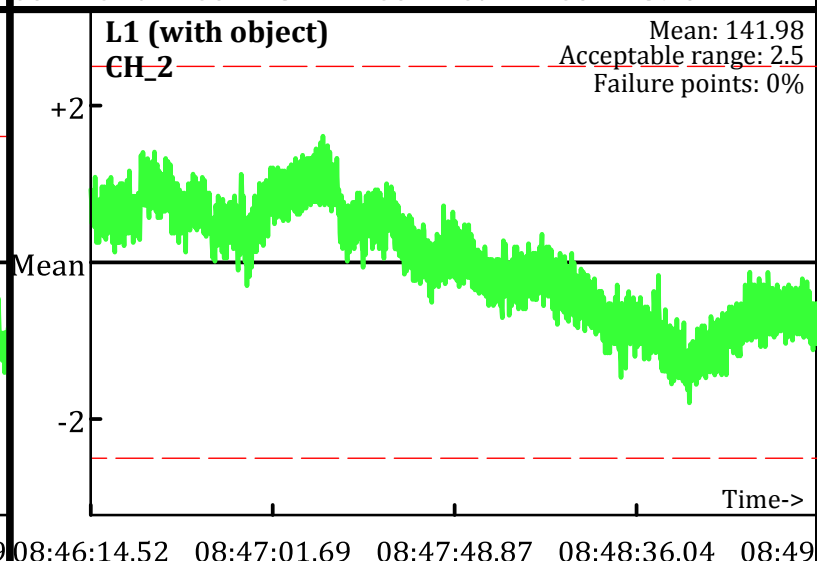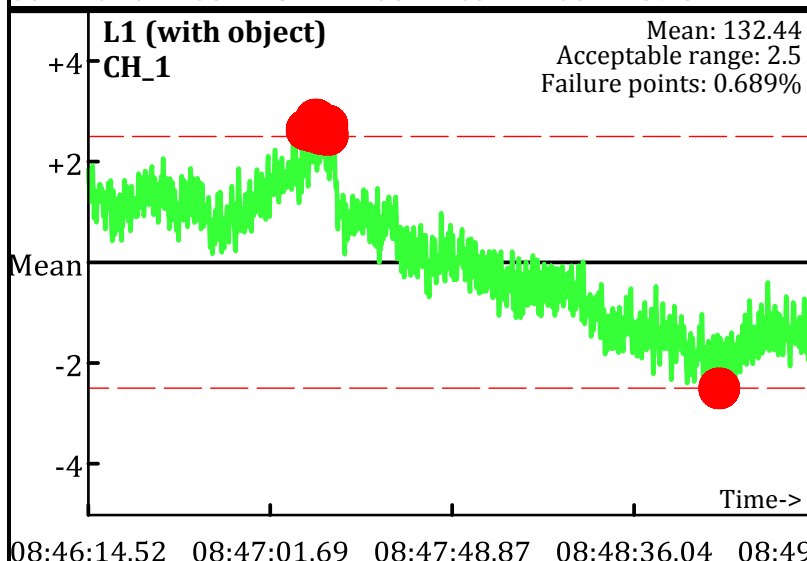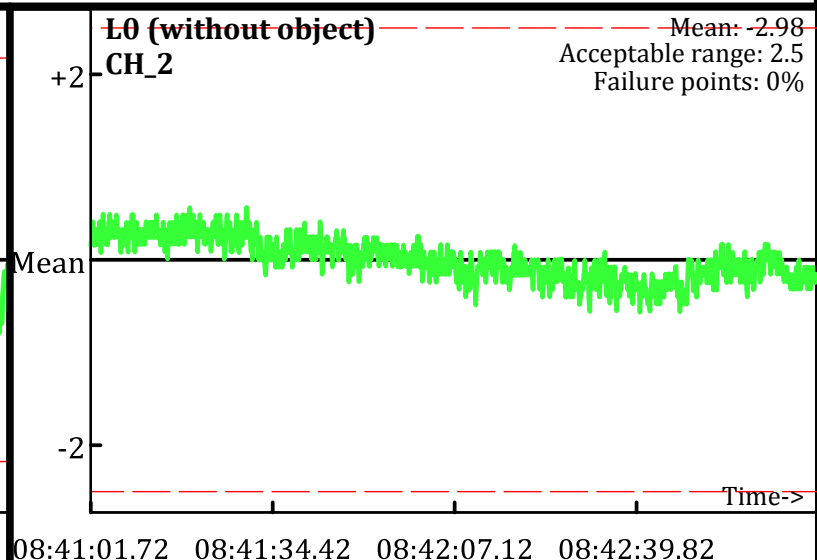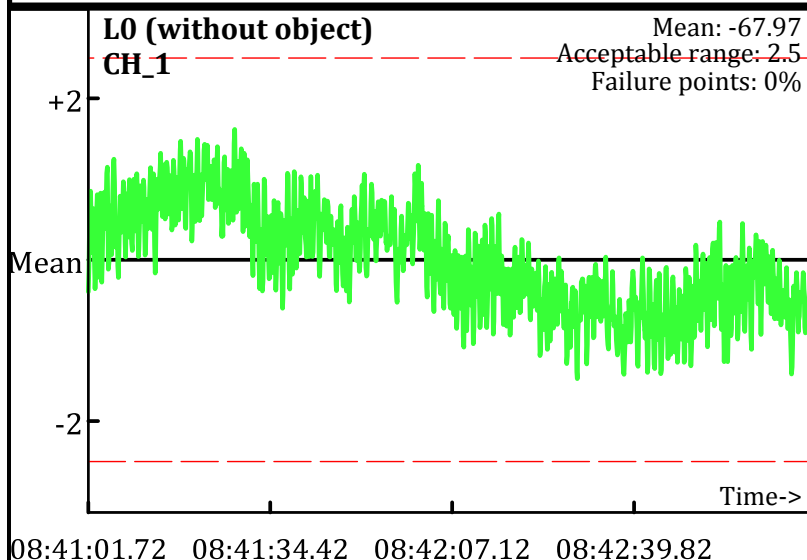Grid/Location: QC Area

● Outside range
— — Acceptable limits

PM test
Operator: BG & JH
Date: 7/23/2009

L7.2 (without object)
CH_1
Mean: -80.29
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:17:01.61   16:17:46.53   16:18:31.45   16:19:16.37   16:20

L7.2 (without object)
CH_2
Mean: 2.55
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:17:01.61   16:17:46.53   16:18:31.45   16:19:16.37   16:20

L8.2 (with object)
CH_1
Mean: 128.91
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:22:32.30   16:23:18.47   16:24:04.65   16:24:50.82   16:25

L8.2 (with object)
CH_2
Mean: 154.01
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:22:32.30   16:23:18.47   16:24:04.65   16:24:50.82   16:25

L9.2 (without object)
CH_1
Mean: -80.83
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:26:21.09   16:26:38.29   16:26:55.49   16:27:12.69   16:27

L9.2 (without object)
CH_2
Mean: 2.46
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:26:21.09   16:26:38.29   16:26:55.49   16:27:12.69   16:27

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
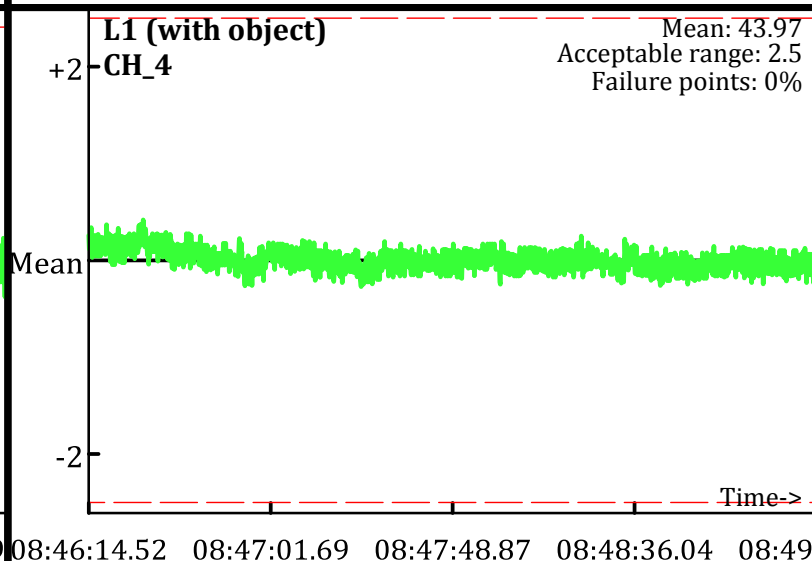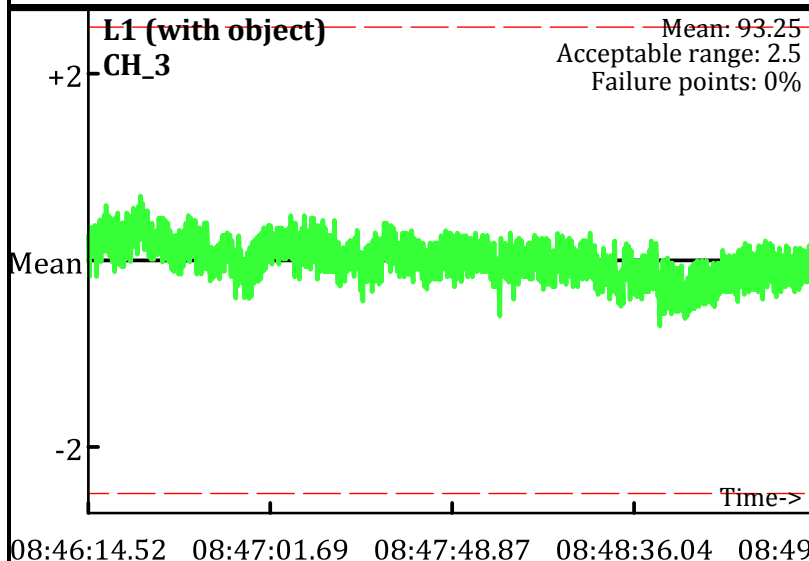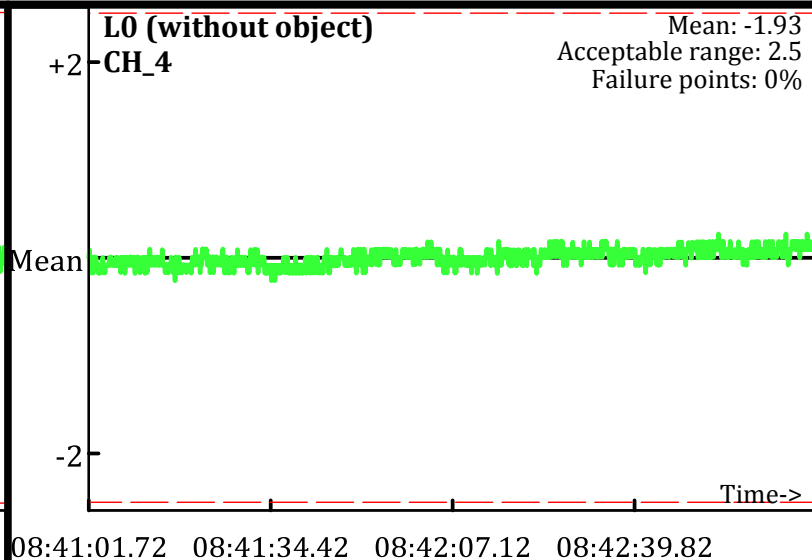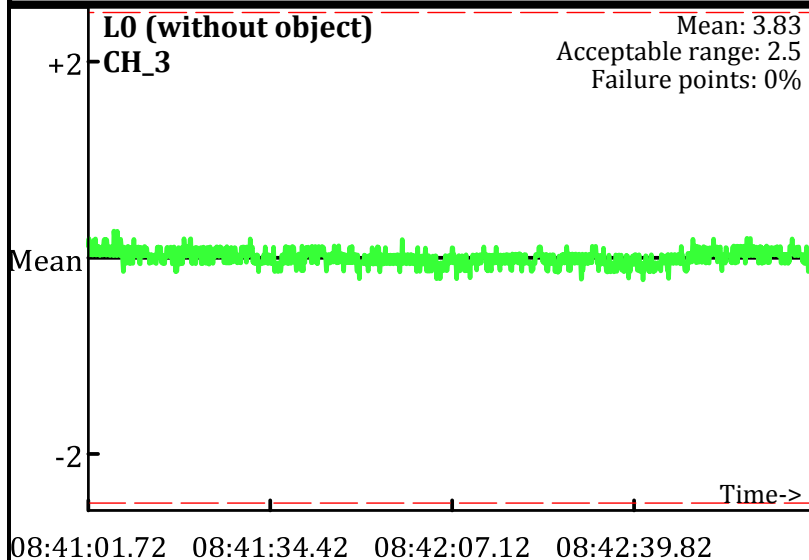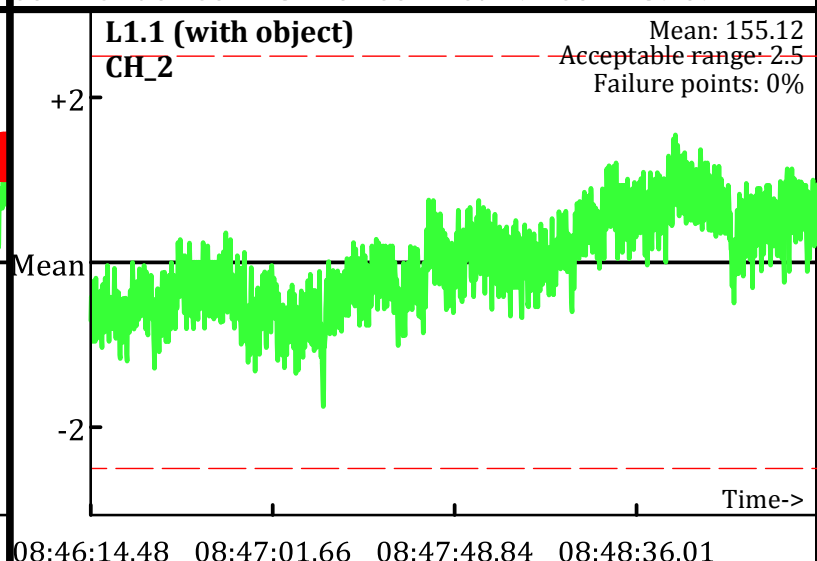Grid/Location: QC Area

● Outside range
— — Acceptable limits

PM test
Operator: BG & JH
Date: 7/23/2009

L7.2 (without object)
CH_3
Mean: 5.82
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:17:01.61 16:17:46.53 16:18:31.45 16:19:16.37 16:20

L7.2 (without object)
CH_4
Mean: -1.7
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:17:01.61 16:17:46.53 16:18:31.45 16:19:16.37 16:20

L8.2 (with object)
CH_3
Mean: 99.09
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:22:32.30 16:23:18.47 16:24:04.65 16:24:50.82 16:25

L8.2 (with object)
CH_4
Mean: 46.07
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:22:32.30 16:23:18.47 16:24:04.65 16:24:50.82 16:25

L9.2 (without object)
CH_3
Mean: 5.83
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:26:21.09 16:26:38.29 16:26:55.49 16:27:12.69 16:27

L9.2 (without object)
CH_4
Mean: -1.69
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:26:21.09 16:26:38.29 16:26:55.49 16:27:12.69 16:27

Database: C:_QCReports_Ord_Data\072309\QC\072309_TA_QC.gdb
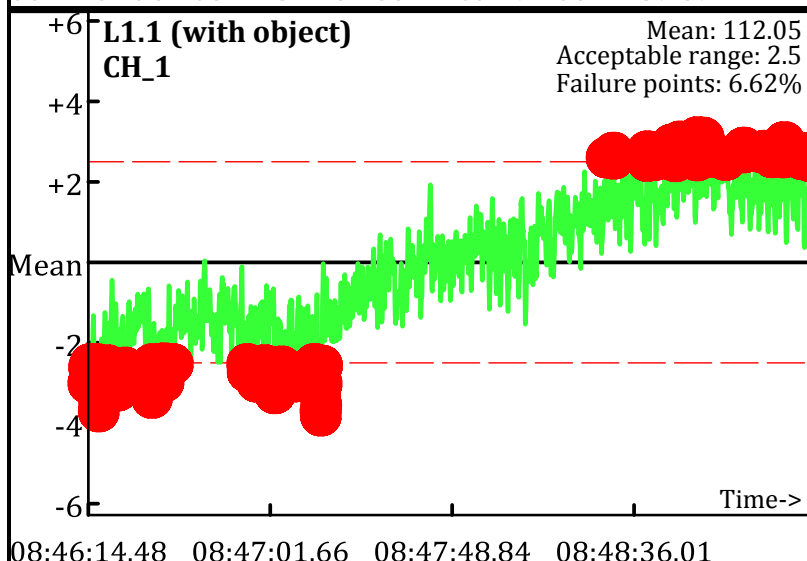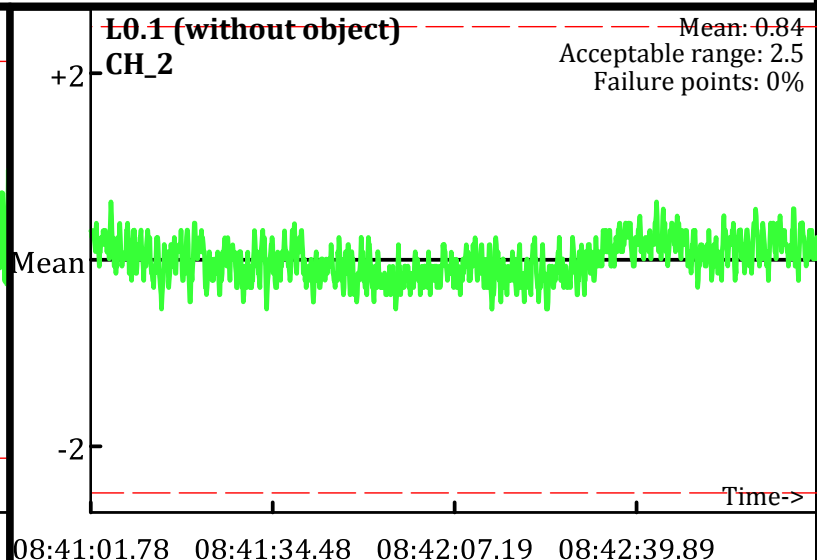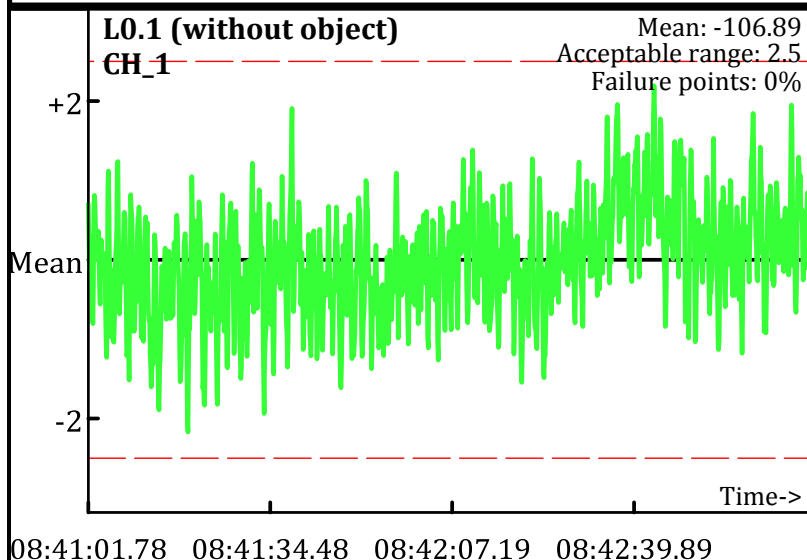Line Name: L7.2 L8.2 L9.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
— — Acceptable limits

AM test
Operator: BG & EG
Date: 7/24/2009

L0 (without object) CH_1
Mean: -67.97
Acceptable range: 2.5
Failure points: 0%

L0 (without object) CH_2
Mean: -2.98
Acceptable range: 2.5
Failure points: 0%

L1 (with object) CH_1
Mean: 132.44
Acceptable range: 2.5
Failure points: 0.689%

L1 (with object) CH_2
Mean: 141.98
Acceptable range: 2.5
Failure points: 0%

L2 (without object) CH_1
Mean: -75.07
Acceptable range: 2.5
Failure points: 0%

L2 (without object) CH_2
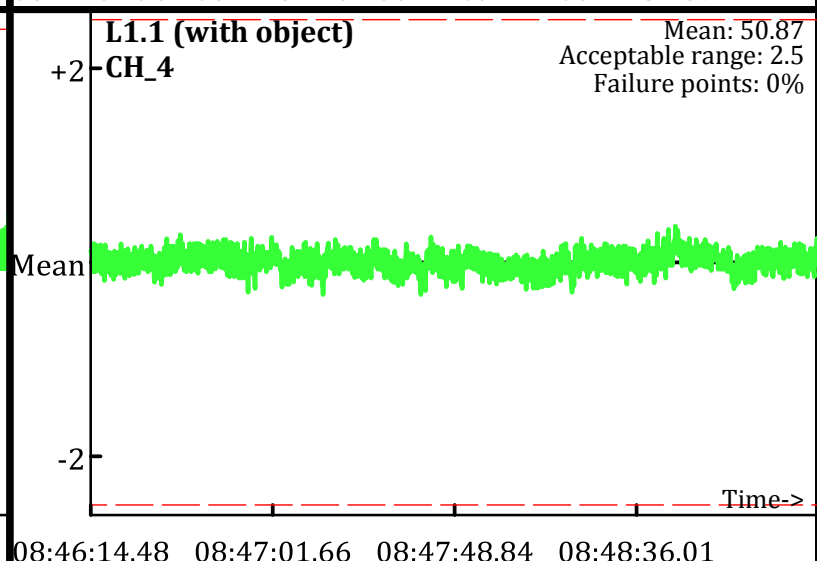Mean: -6.84
Acceptable range: 2.5
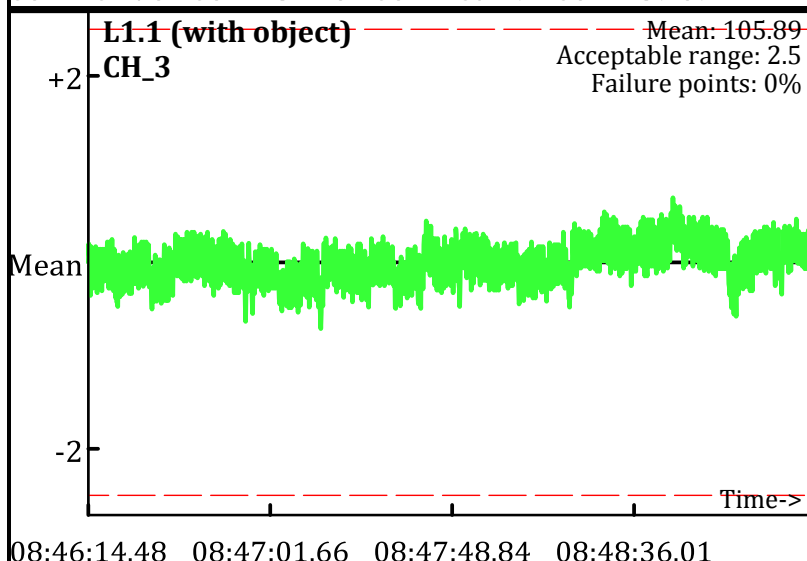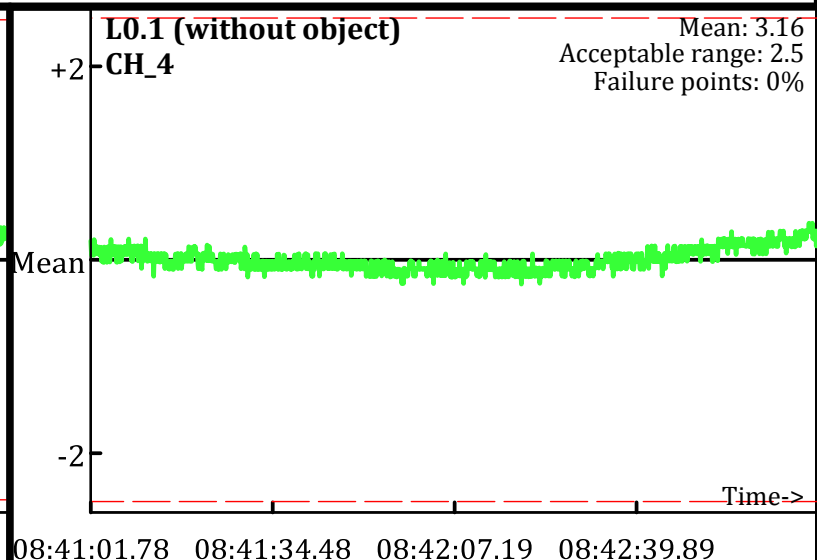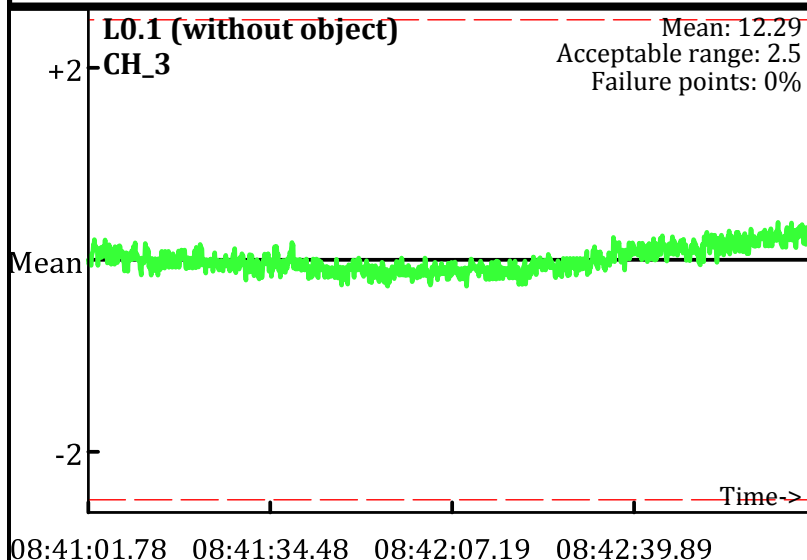Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
-- -- Acceptable limits

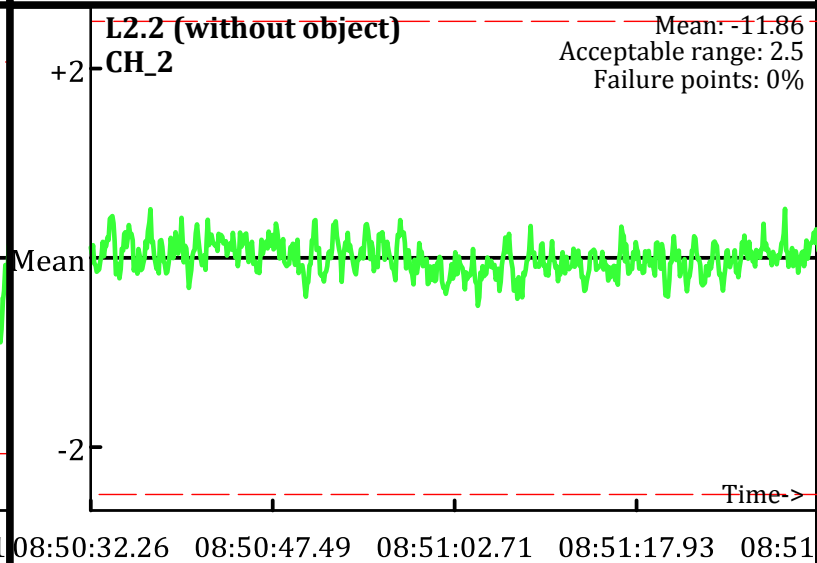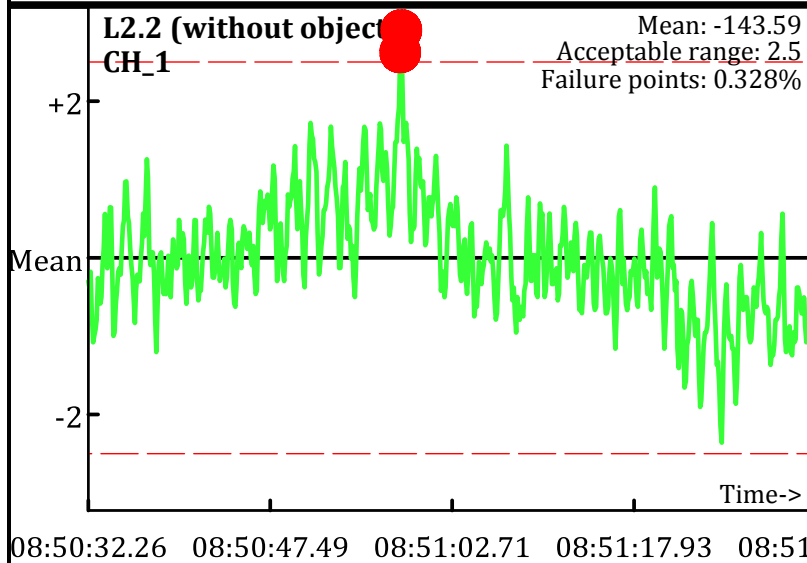AM test
Operator: BG & EG
Date: 7/24/2009

L0 (without object)
CH_3

Mean: 3.83
Acceptable range: 2.5
Failure points: 0%

08:41:01.72   08:41:34.42   08:42:07.12   08:42:39.82

L0 (without object)
CH_4

Mean: -1.93
Acceptable range: 2.5
Failure points: 0%

08:41:01.72   08:41:34.42   08:42:07.12   08:42:39.82

L1 (with object)
CH_3

Mean: 93.25
Acceptable range: 2.5
Failure points: 0%

08:46:14.52   08:47:01.69   08:47:48.87   08:48:36.04   08:49

L1 (with object)
CH_4

Mean: 43.97
Acceptable range: 2.5
Failure points: 0%

08:46:14.52   08:47:01.69   08:47:48.87   08:48:36.04   08:49

L2 (without object)
CH_3

Mean: 2.9
Acceptable range: 2.5
Failure points: 0%

08:50:32.22   08:50:47.44   08:51:02.67   08:51:17.90   08:51

L2 (without object)
CH_4

Mean: -2.12
Acceptable range: 2.5
Failure points: 0%

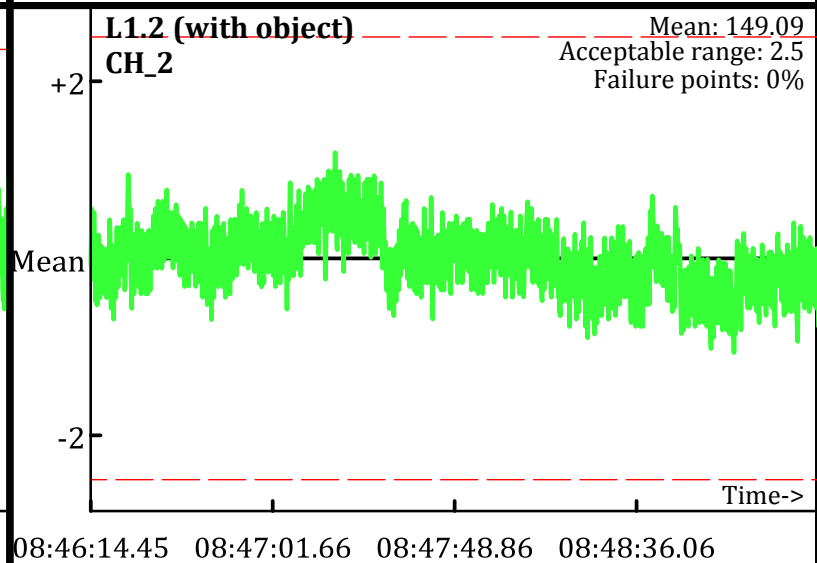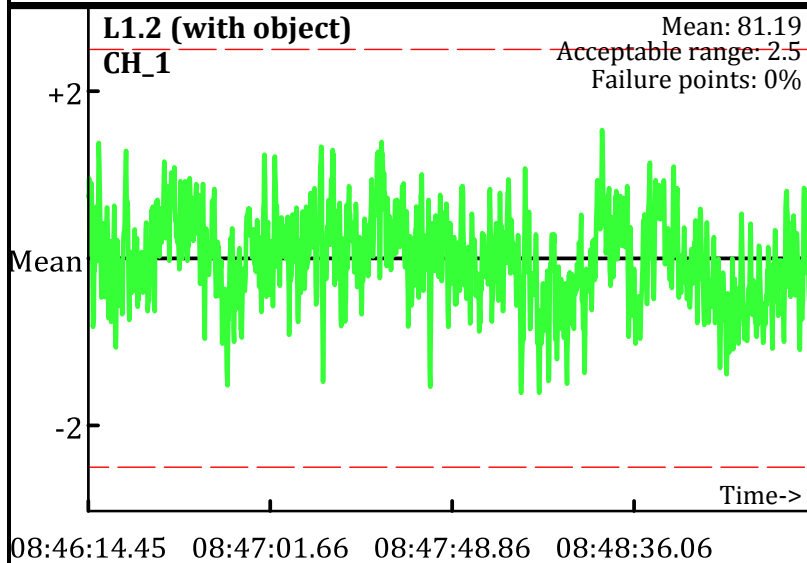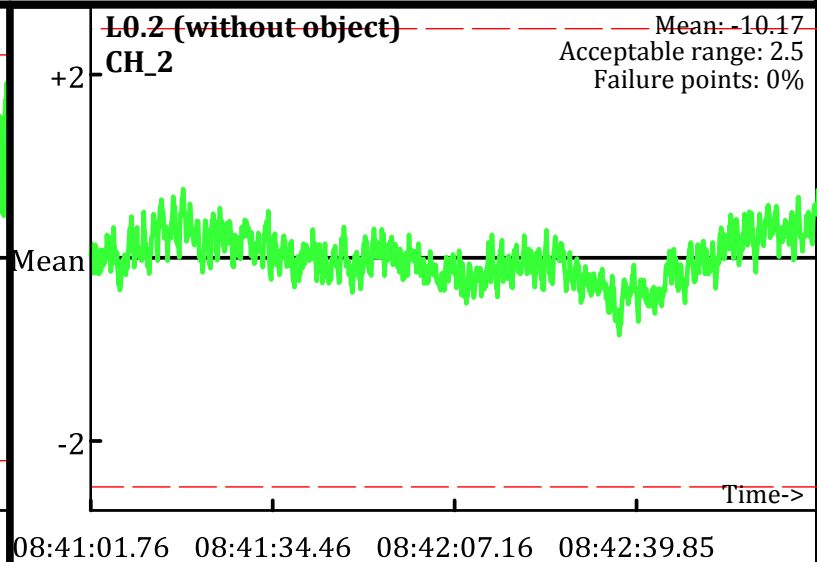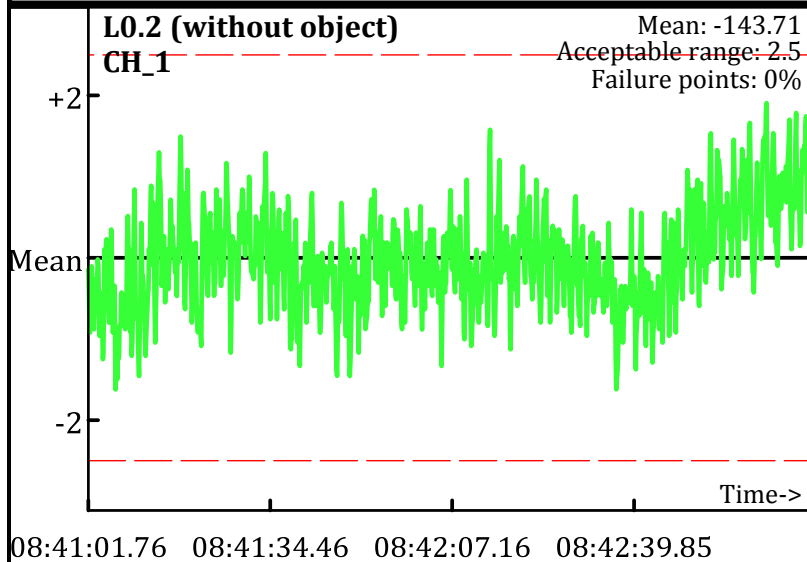08:50:32.22   08:50:47.44   08:51:02.67   08:51:17.90   08:51

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
– – – Acceptable limits

AM test
Operator: BG & EG
Date: 7/24/2009

L0.1 (without object)
CH_1
Mean: -106.89
Acceptable range: 2.5
Failure points: 0%

L0.1 (without object)
CH_2
Mean: 0.84
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_1
Mean: 112.05
Acceptable range: 2.5
Failure points: 6.62%

L1.1 (with object)
CH_2
Mean: 155.12
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_1
Mean: -93.45
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_2
Mean: 4.89
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072409\QC\072409_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
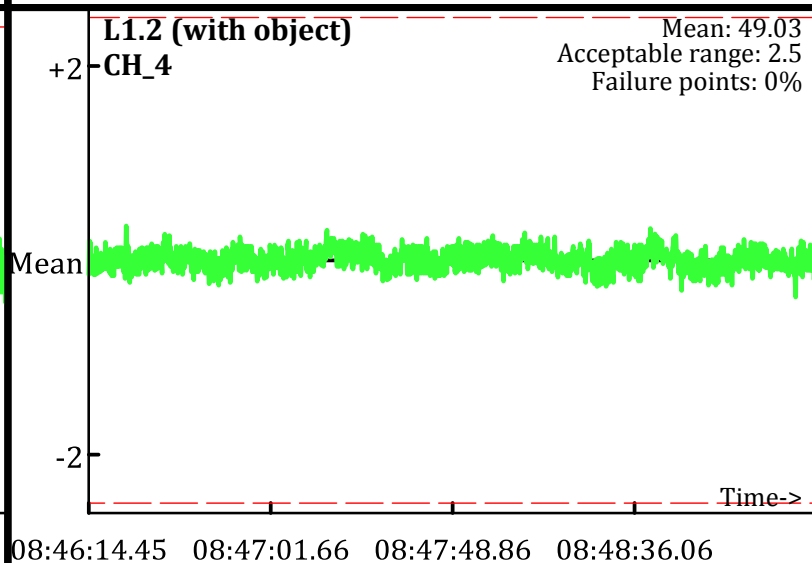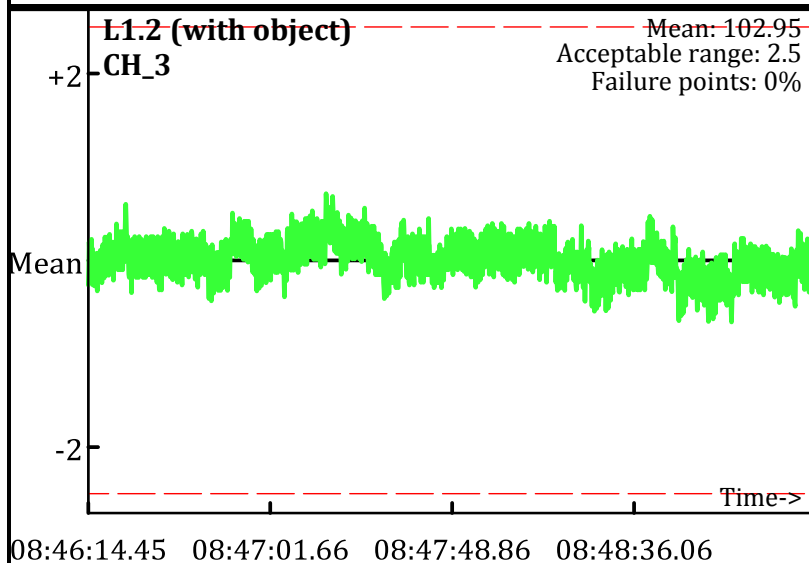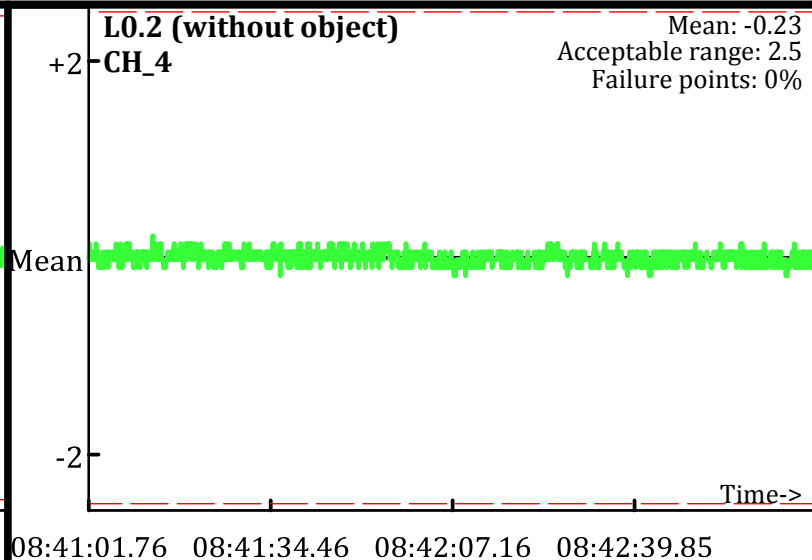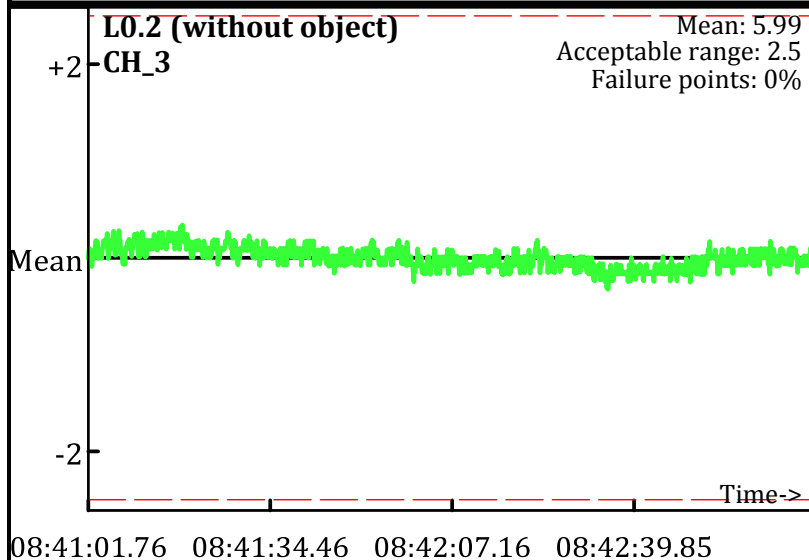Grid/Location: QC Area

● Outside range
--- Acceptable limits

AM test
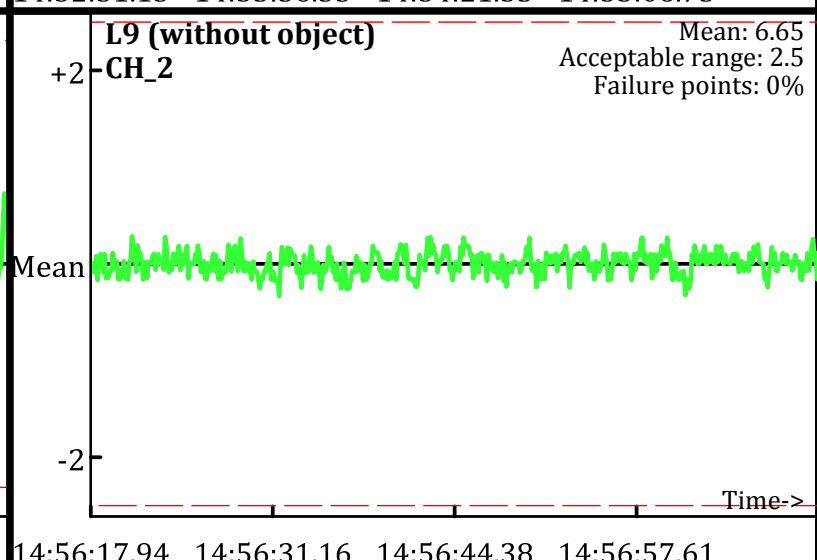Operator: BG & EG
Date: 7/24/2009

L0.1 (without object)
CH_3
Mean: 12.29
Acceptable range: 2.5
Failure points: 0%

08:41:01.78   08:41:34.48   08:42:07.19   08:42:39.89

L0.1 (without object)
CH_4
Mean: 3.16
Acceptable range: 2.5
Failure points: 0%

08:41:01.78   08:41:34.48   08:42:07.19   08:42:39.89

L1.1 (with object)
CH_3
Mean: 105.89
Acceptable range: 2.5
Failure points: 0%

08:46:14.48   08:47:01.66   08:47:48.84   08:48:36.01

L1.1 (with object)
CH_4
Mean: 50.87
Acceptable range: 2.5
Failure points: 0%

08:46:14.48   08:47:01.66   08:47:48.84   08:48:36.01

L2.1 (without object)
CH_3
Mean: 13.24
Acceptable range: 2.5
Failure points: 0%

08:50:32.28   08:50:47.48   08:51:02.69   08:51:17.89

L2.1 (without object)
CH_4
Mean: 3.56
Acceptable range: 2.5
Failure points: 0%

08:50:32.28   08:50:47.48   08:51:02.69   08:51:17.89

Database: C:_QCReports_Ord_Data\072409\QC\072409_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
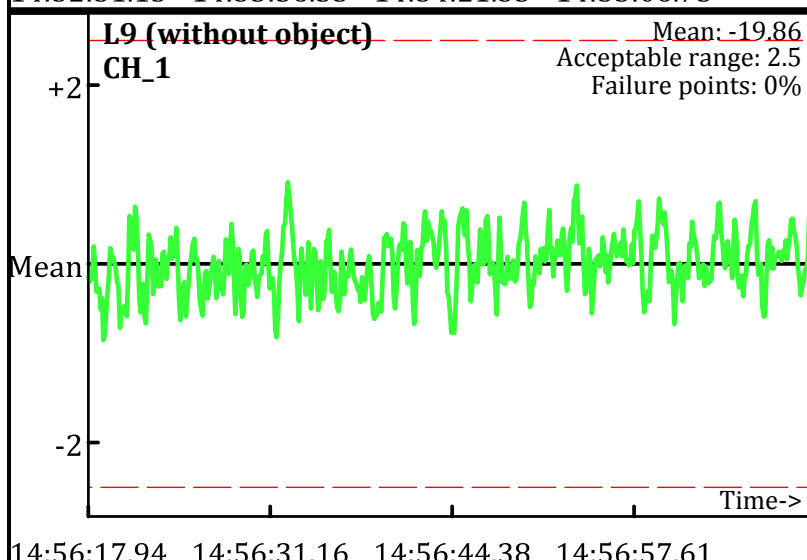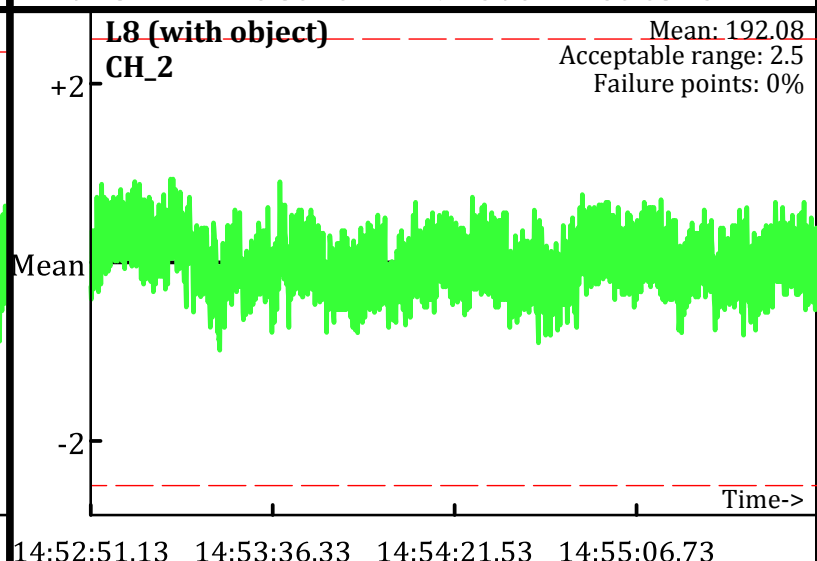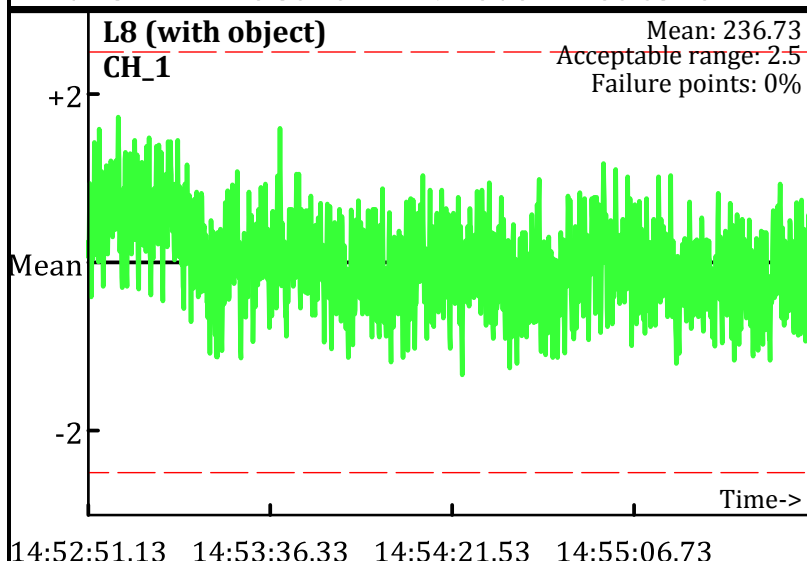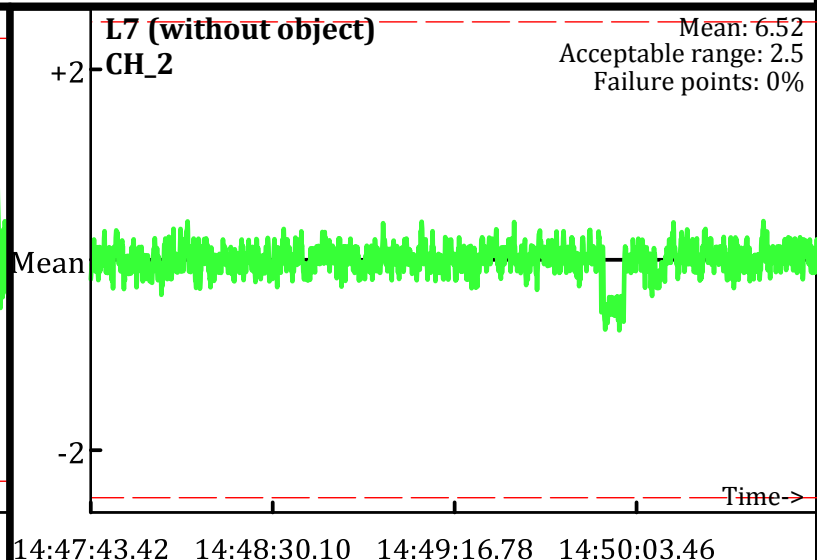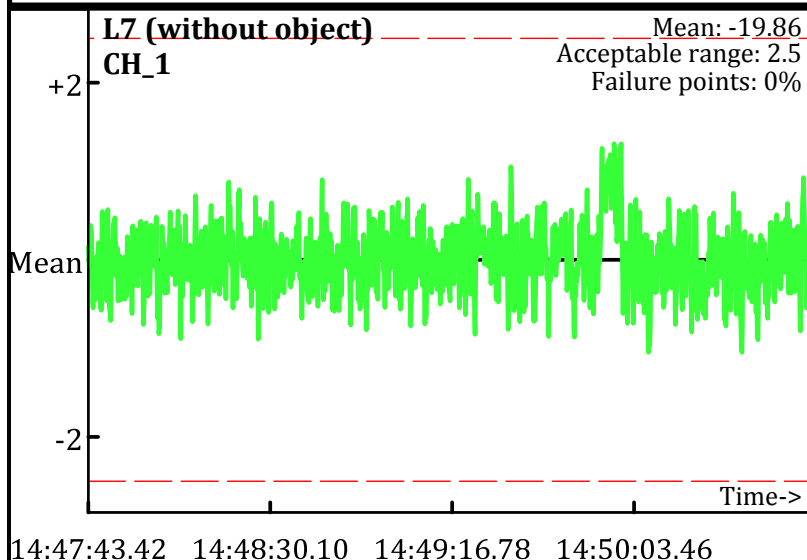— — Acceptable limits

AM test
Operator: BG & EG
Date: 7/24/2009
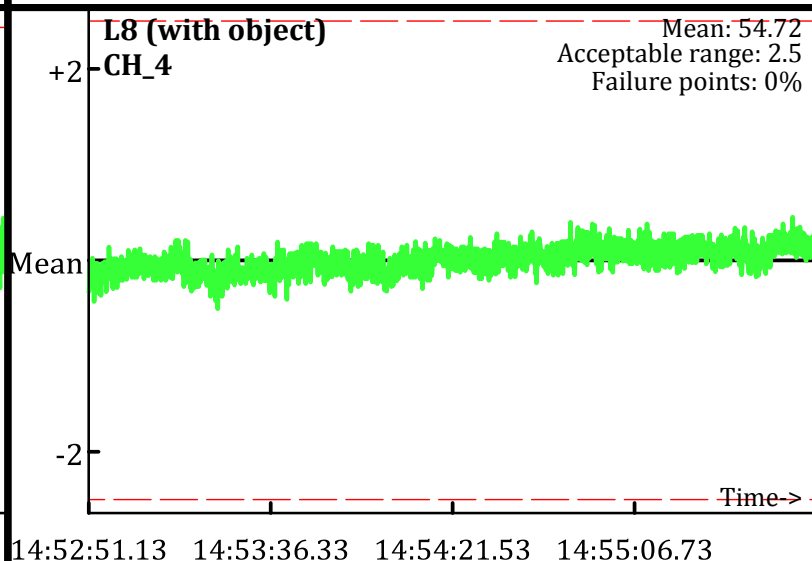
L0.2 (without object)
CH_1
Mean: -143.71
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_2
Mean: -10.17
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_1
Mean: 81.19
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_2
Mean: 149.09
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_1
Mean: -143.59
Acceptable range: 2.5
Failure points: 0.328%

L2.2 (without object)
CH_2
Mean: -11.86
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

L0.2 (without object)
CH_3
Mean: 5.99
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

08:41:01.76   08:41:34.46   08:42:07.16   08:42:39.85

L0.2 (without object)
CH_4
Mean: -0.23
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

08:41:01.76   08:41:34.46   08:42:07.16   08:42:39.85

L1.2 (with object)
CH_3
Mean: 102.95
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

08:46:14.45   08:47:01.66   08:47:48.86   08:48:36.06

L1.2 (with object)
CH_4
Mean: 49.03
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

08:46:14.45   08:47:01.66   08:47:48.86   08:48:36.06

L2.2 (without object)
CH_3
Mean: 5.05
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

08:50:32.26   08:50:47.49   08:51:02.71   08:51:17.93   08:51

L2.2 (without object)
CH_4
Mean: -0.49
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

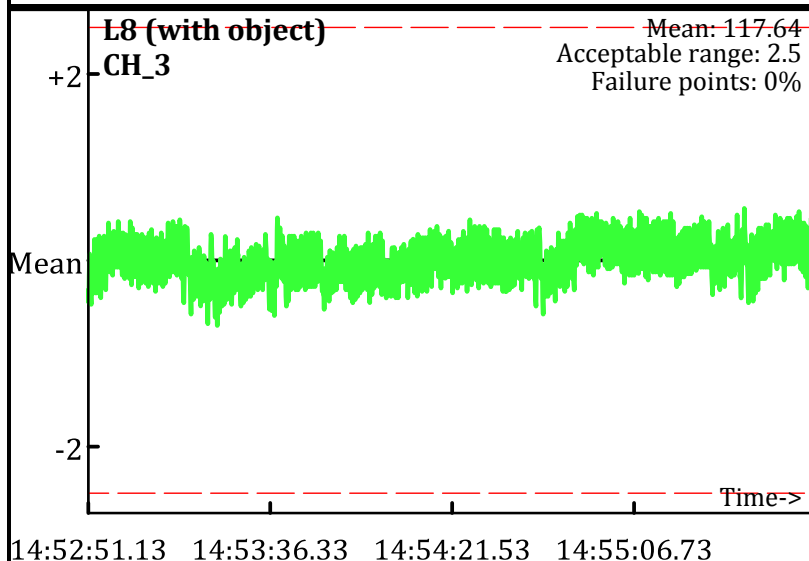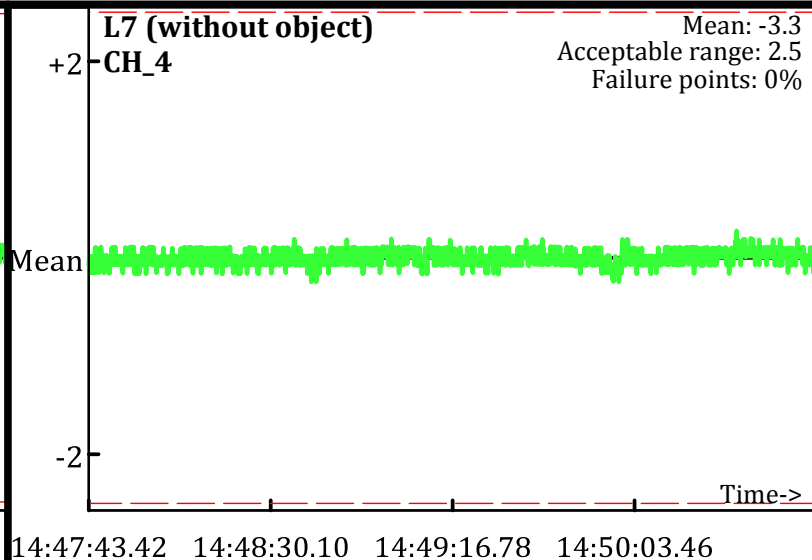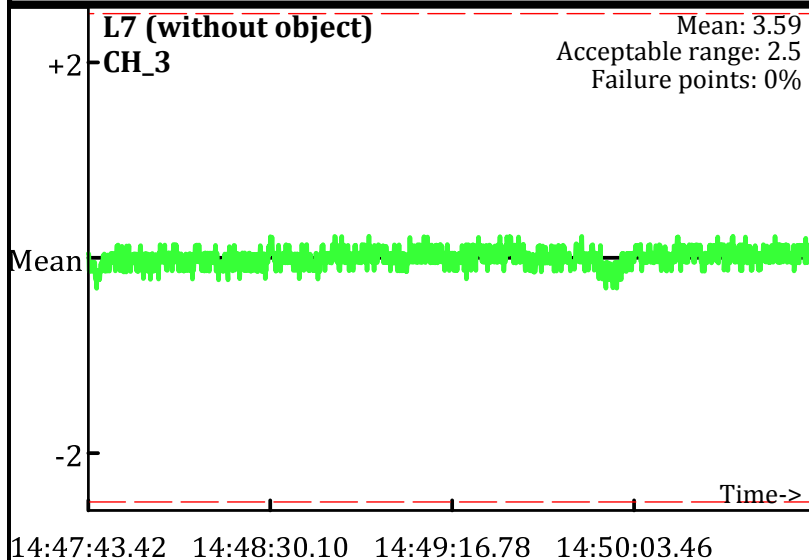08:50:32.26   08:50:47.49   08:51:02.71   08:51:17.93   08:51

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
– – – Acceptable limits
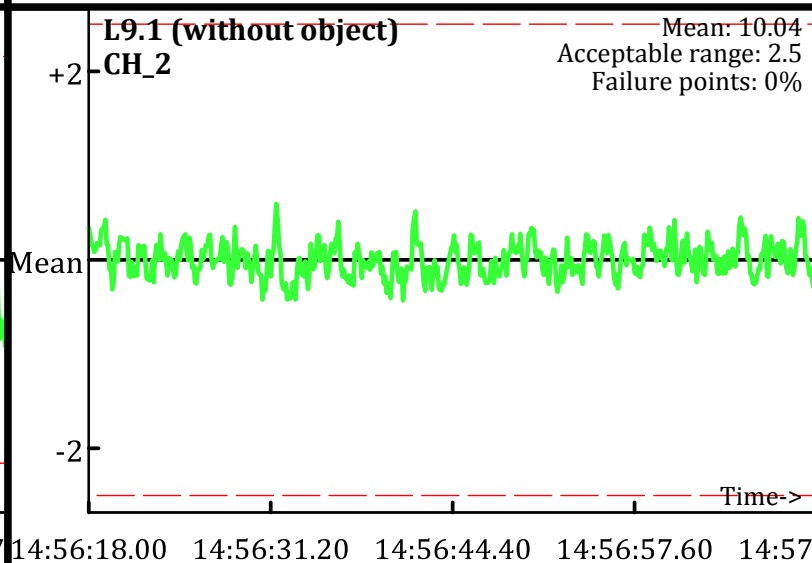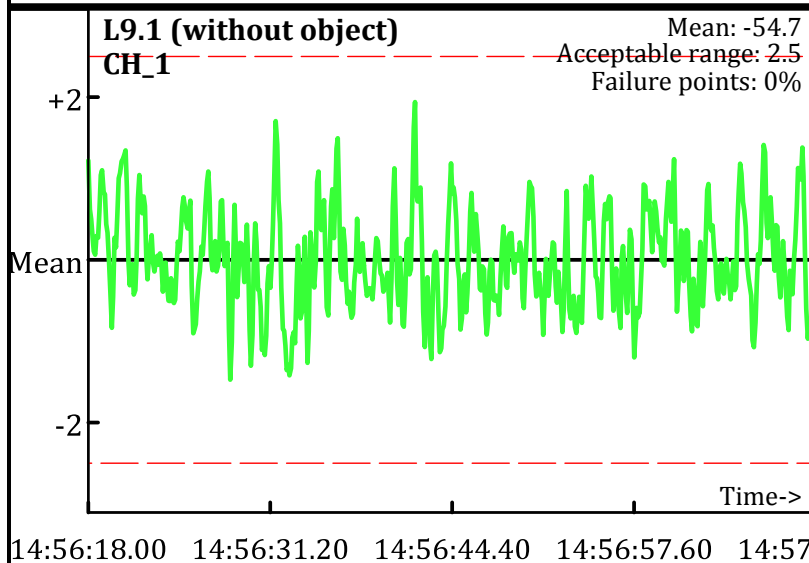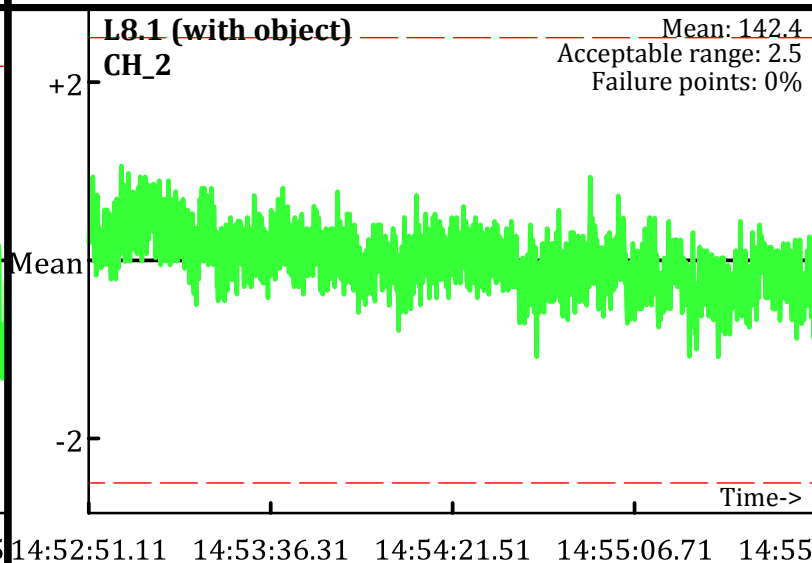
PM test
Operator: BG & EG
Date: 7/24/2009

L7 (without object)
CH_1
Mean: -19.86
Acceptable range: 2.5
Failure points: 0%

L7 (without object)
CH_2
Mean: 6.52
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_1
Mean: 236.73
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_2
Mean: 192.08
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
CH_1
Mean: -19.86
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
CH_2
Mean: 6.65
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072409\QC\072409_TA_QC.gdb
Line Name: L7 L8 L9

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
--- Acceptable limits
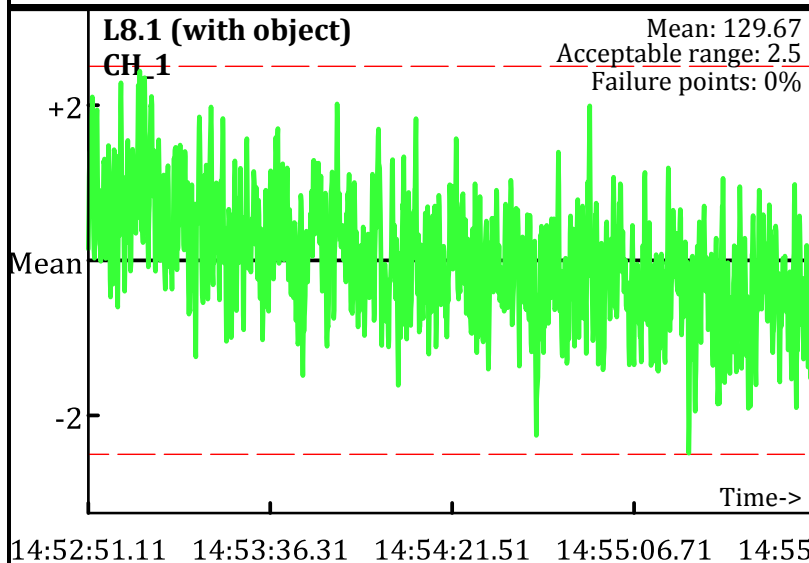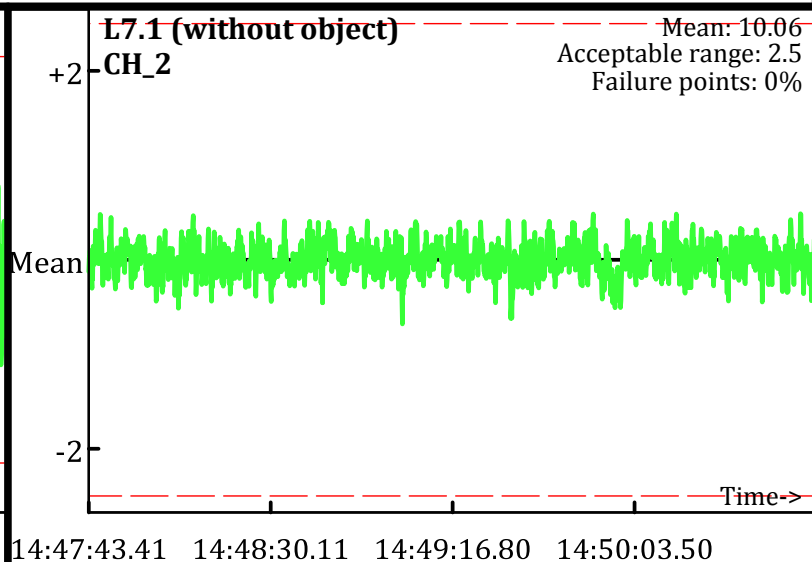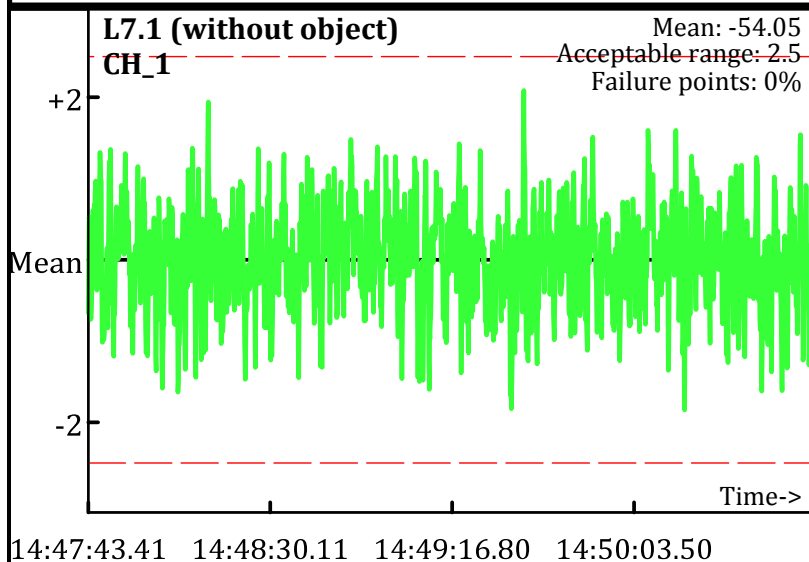
PM test
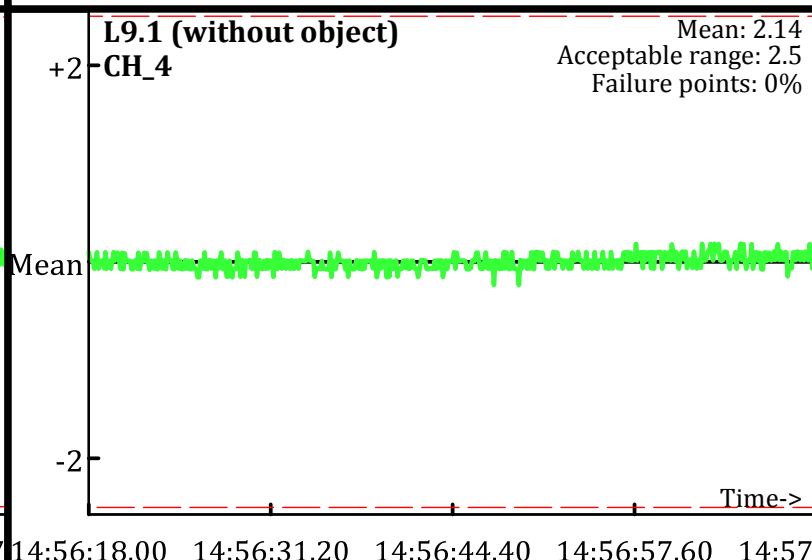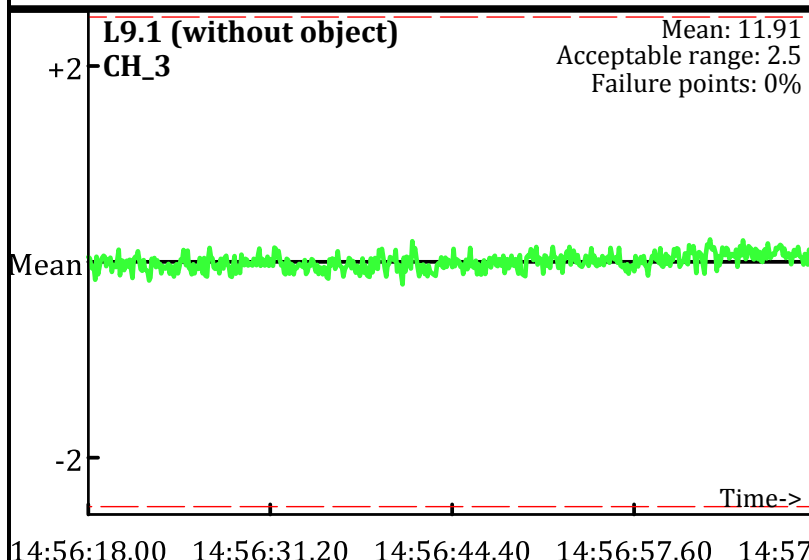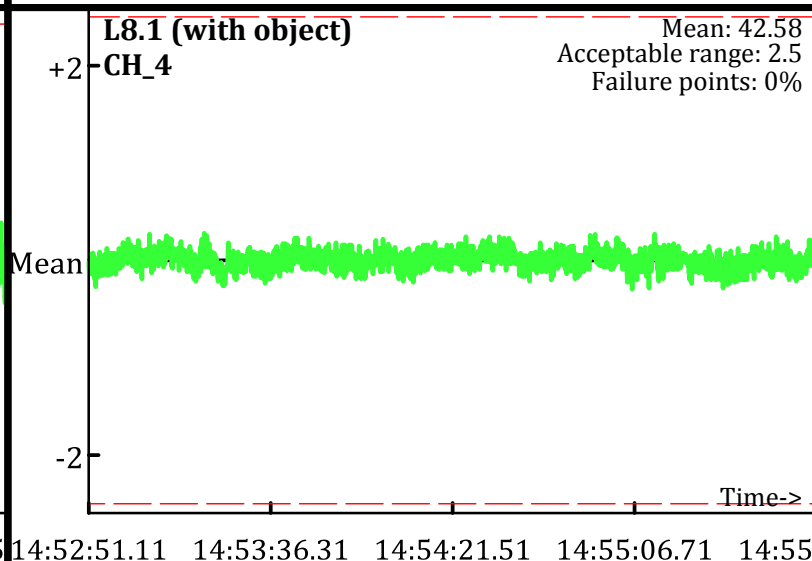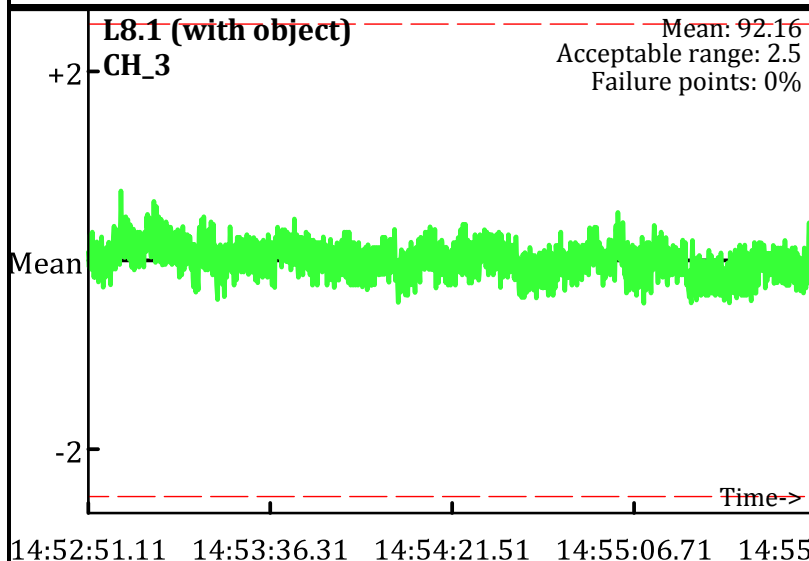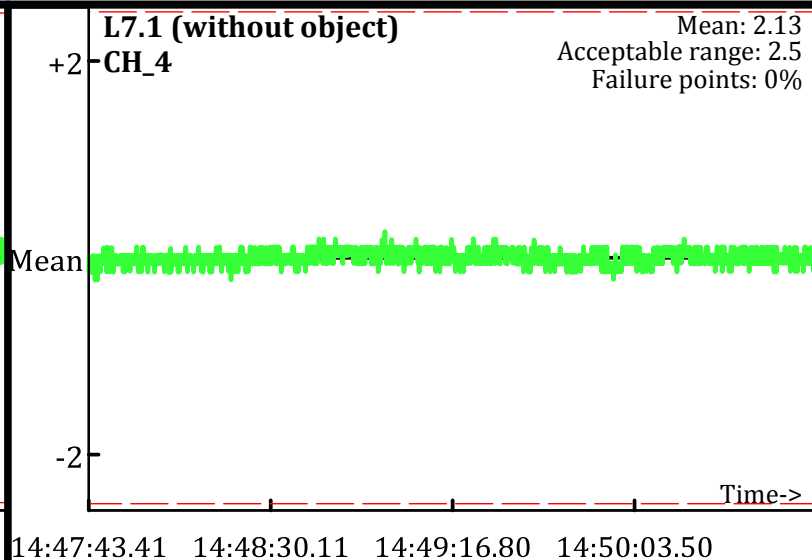Operator: BG & EG
Date: 7/24/2009

L7 (without object)
CH_3
Mean: 3.59
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
14:47:43.42   14:48:30.10   14:49:16.78   14:50:03.46

L7 (without object)
CH_4
Mean: -3.3
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
14:47:43.42   14:48:30.10   14:49:16.78   14:50:03.46

L8 (with object)
CH_3
Mean: 117.64
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
14:52:51.13   14:53:36.33   14:54:21.53   14:55:06.73

L8 (with object)
CH_4
Mean: 54.72
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
14:52:51.13   14:53:36.33   14:54:21.53   14:55:06.73

L9 (without object)
CH_3
Mean: 3.71
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
14:56:17.94   14:56:31.16   14:56:44.38   14:56:57.61

L9 (without object)
CH_4
Mean: -3.27
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
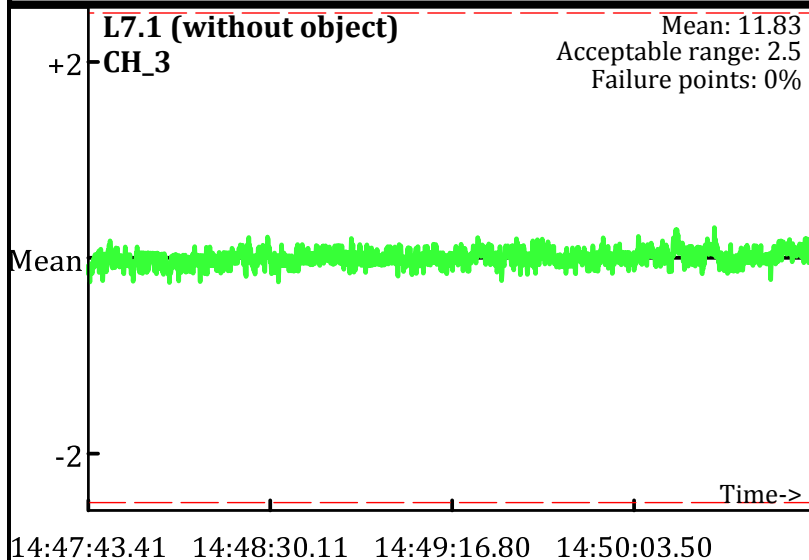14:56:17.94   14:56:31.16   14:56:44.38   14:56:57.61

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
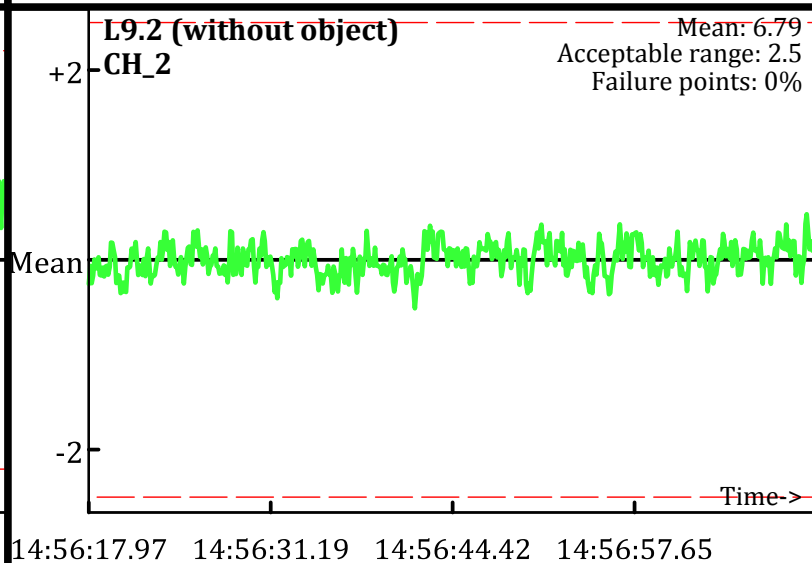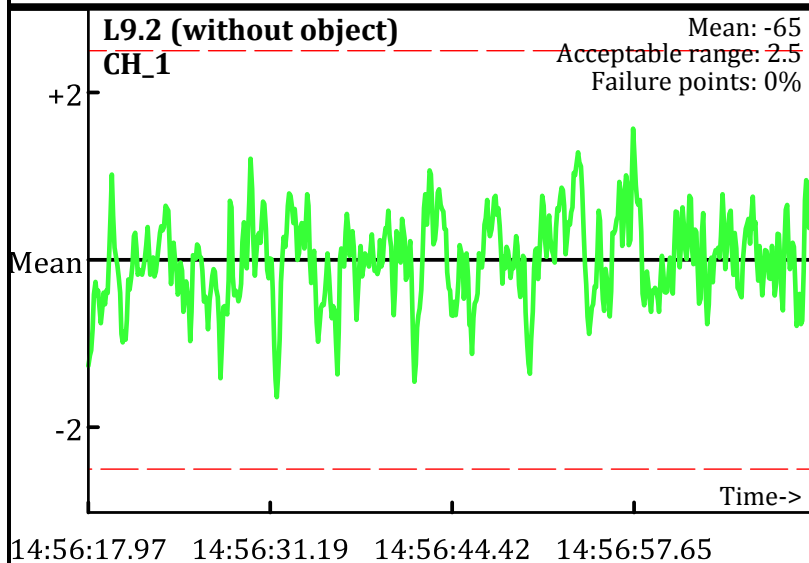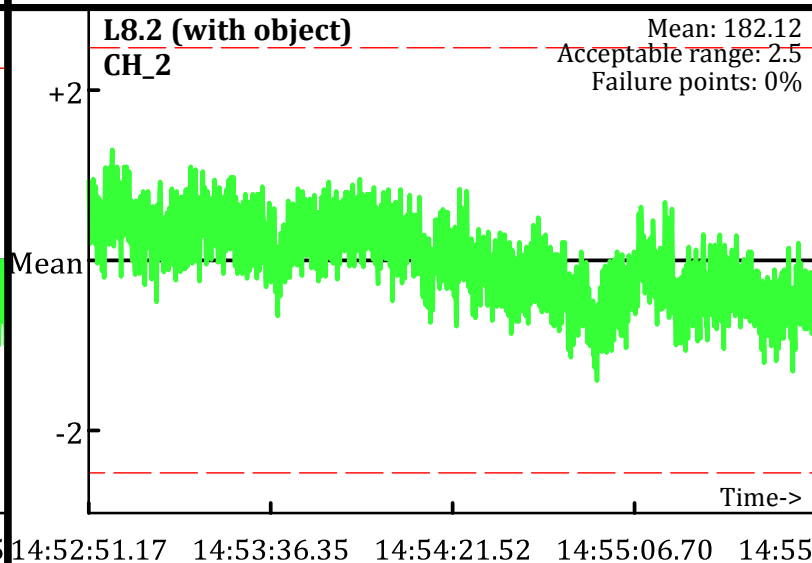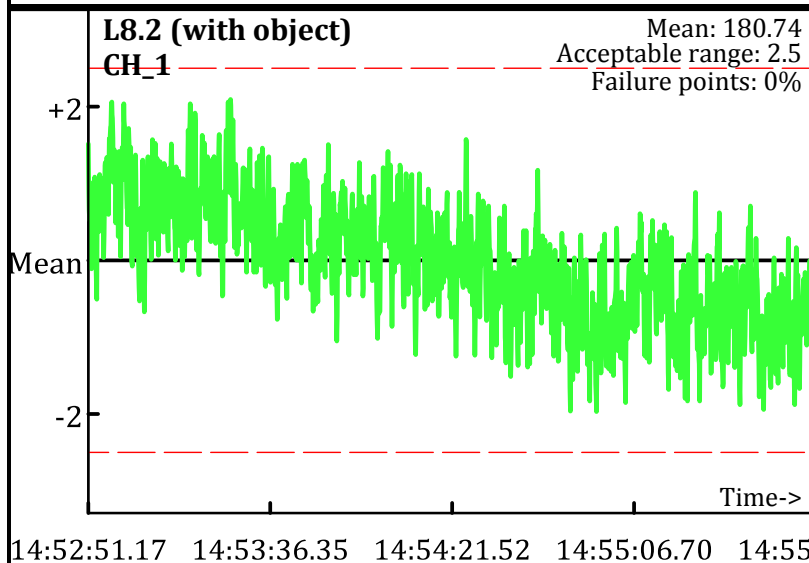- - - Acceptable limits

PM test
Operator: BG & EG
Date: 7/24/2009

L7.1 (without object)
CH_1
Mean: -54.05
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_2
Mean: 10.06
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object)
CH_1
Mean: 129.67
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object)
CH_2
Mean: 142.4
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_1
Mean: -54.7
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object)
CH_2
Mean: 10.04
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072409\QC\072409_TA_QC.gdb
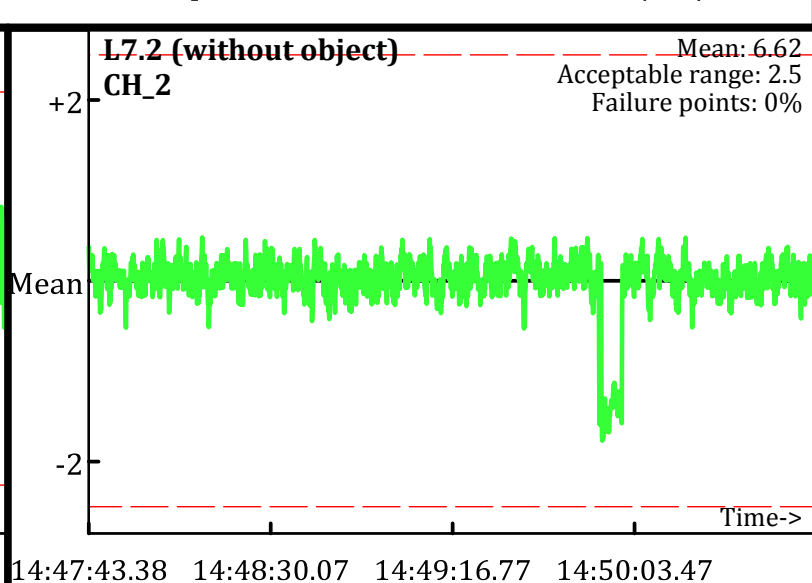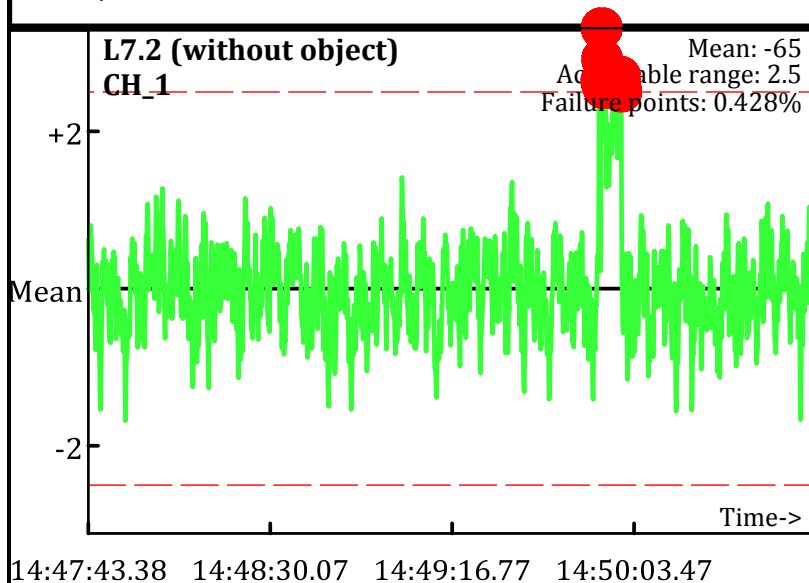Line Name: L7.1 L8.1 L9.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

L7.1 (without object)
CH_3
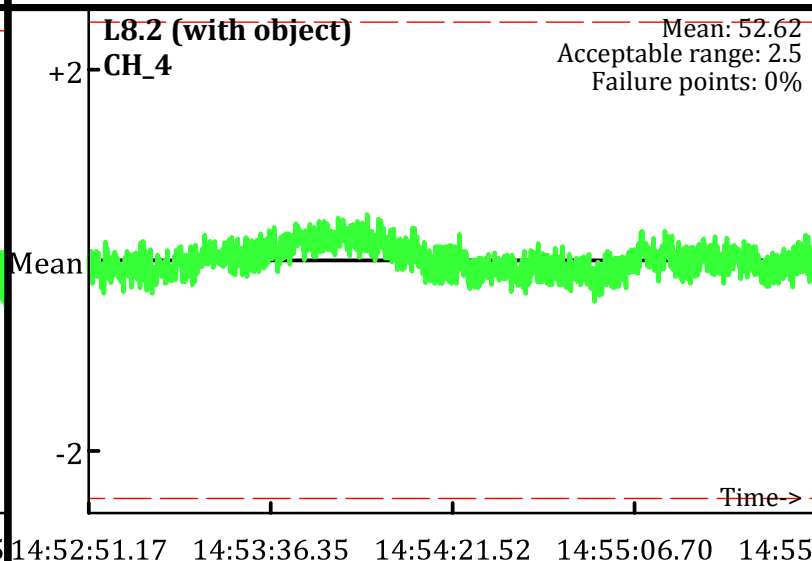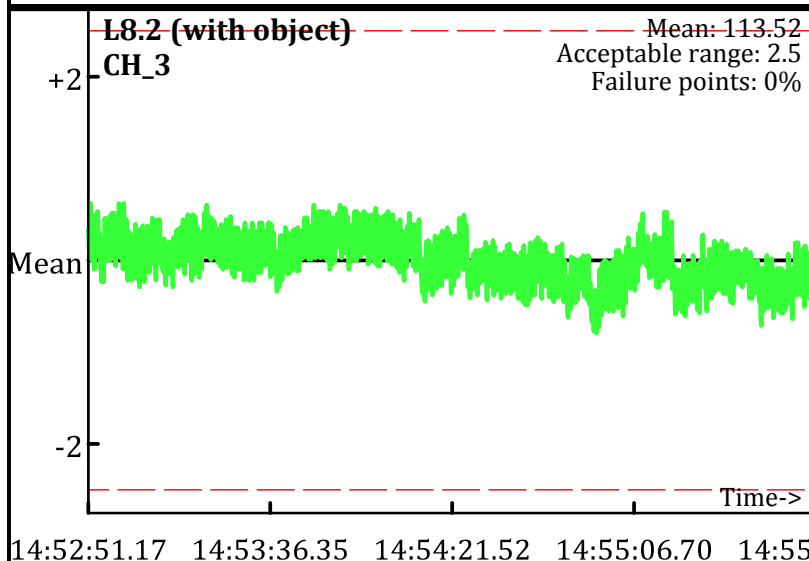Mean: 11.83
Acceptable range: 2.5
Failure points: 0%

14:47:43.41   14:48:30.11   14:49:16.80   14:50:03.50

L7.1 (without object)
CH_4
Mean: 2.13
Acceptable range: 2.5
Failure points: 0%

14:47:43.41   14:48:30.11   14:49:16.80   14:50:03.50

L8.1 (with object)
CH_3
Mean: 92.16
Acceptable range: 2.5
Failure points: 0%

14:52:51.11   14:53:36.31   14:54:21.51   14:55:06.71   14:55

L8.1 (with object)
CH_4
Mean: 42.58
Acceptable range: 2.5
Failure points: 0%

14:52:51.11   14:53:36.31   14:54:21.51   14:55:06.71   14:55

L9.1 (without object)
CH_3
Mean: 11.91
Acceptable range: 2.5
Failure points: 0%

14:56:18.00   14:56:31.20   14:56:44.40   14:56:57.60   14:57

L9.1 (without object)
CH_4
Mean: 2.14
Acceptable range: 2.5
Failure points: 0%

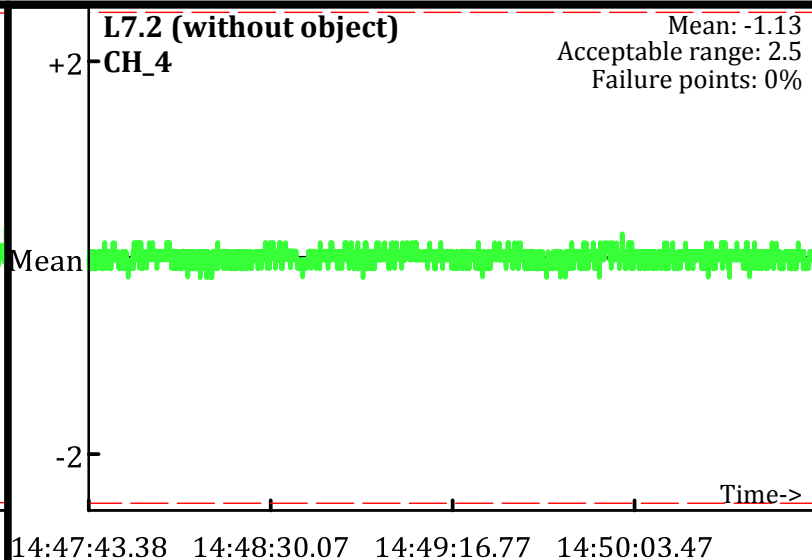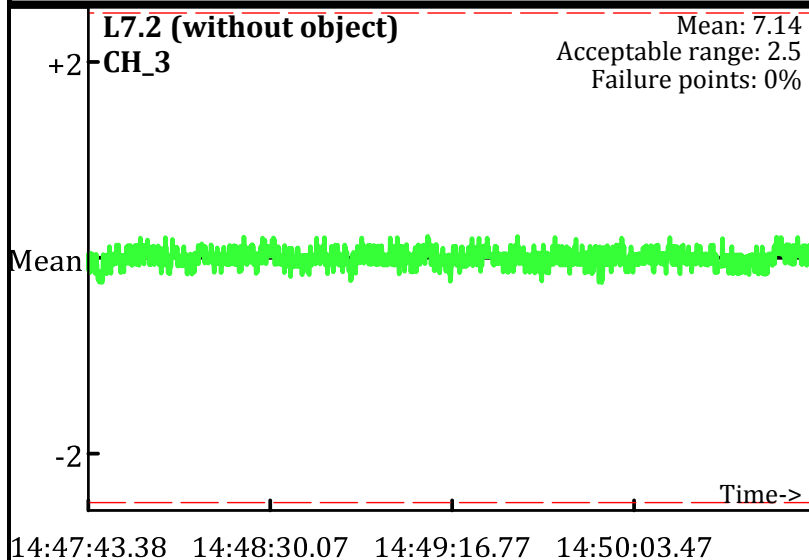14:56:18.00   14:56:31.20   14:56:44.40   14:56:57.60   14:57

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

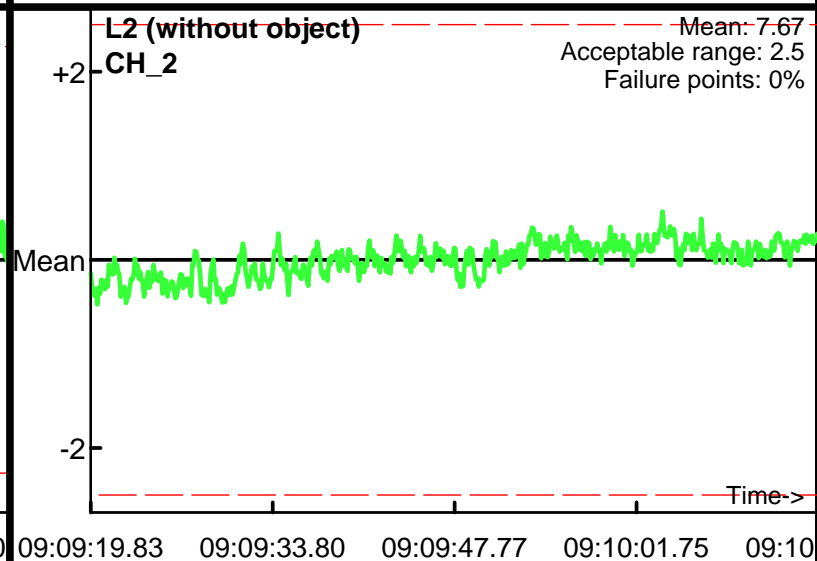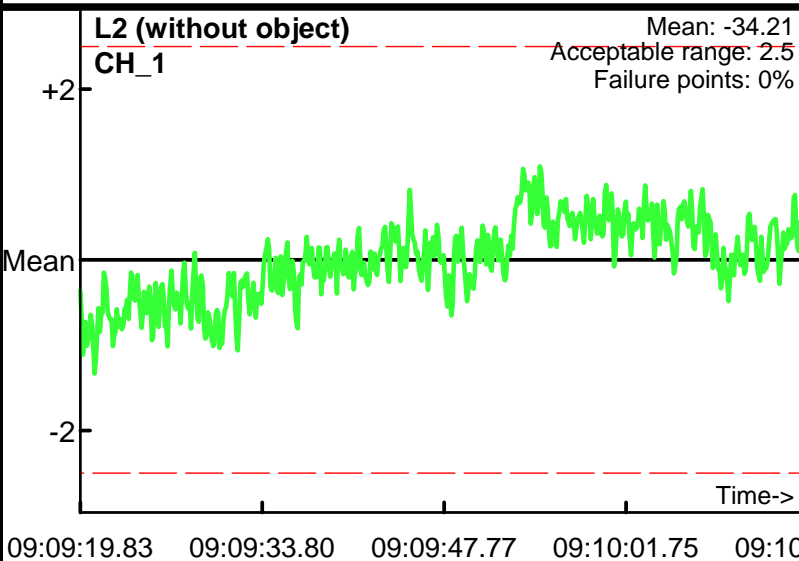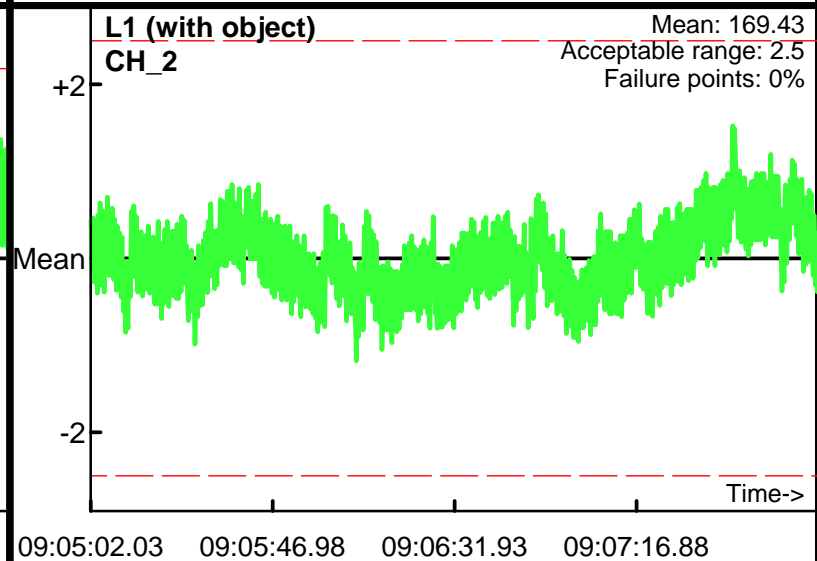PM test
Operator: BG & EG
Date: 7/24/2009

L7.2 (without object)
CH_1

Mean: -65
Acceptable range: 2.5
Failure points: 0.428%

+2

Mean

-2

Time->

14:47:43.38   14:48:30.07   14:49:16.77   14:50:03.47

L7.2 (without object)
CH_2

Mean: 6.62
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:47:43.38   14:48:30.07   14:49:16.77   14:50:03.47

L8.2 (with object)
CH_1

Mean: 180.74
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:52:51.17   14:53:36.35   14:54:21.52   14:55:06.70   14:55

L8.2 (with object)
CH_2

Mean: 182.12
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:52:51.17   14:53:36.35   14:54:21.52   14:55:06.70   14:55

L9.2 (without object)
CH_1

Mean: -65
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:56:17.97   14:56:31.19   14:56:44.42   14:56:57.65

L9.2 (without object)
CH_2

Mean: 6.79
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:56:17.97   14:56:31.19   14:56:44.42   14:56:57.65

Database: C:_QCReports_Ord_Data\072409\QC\072409_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 1

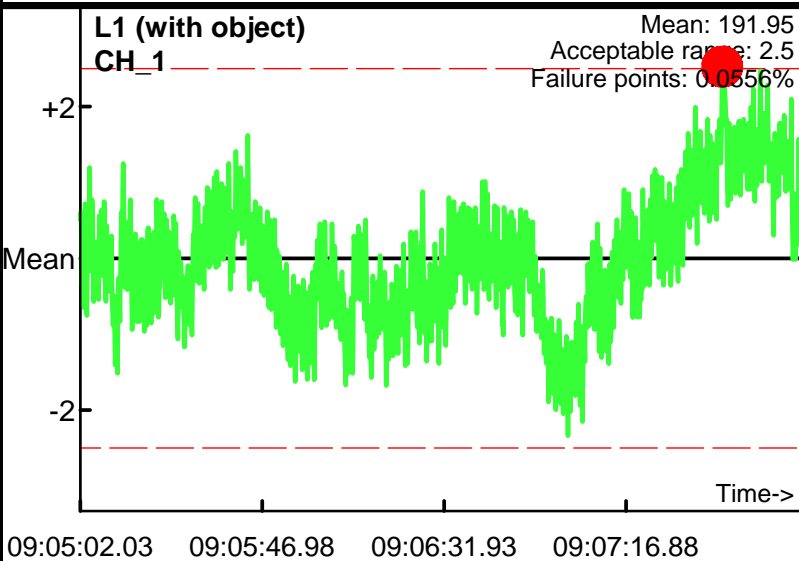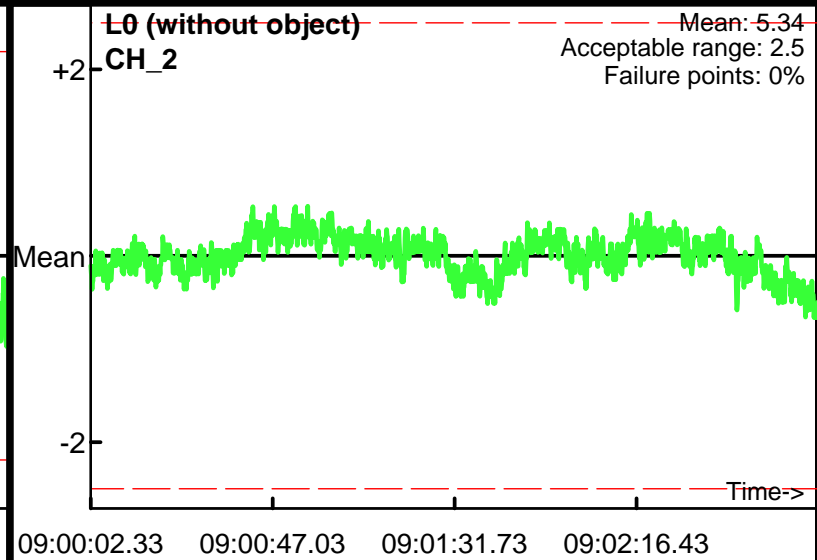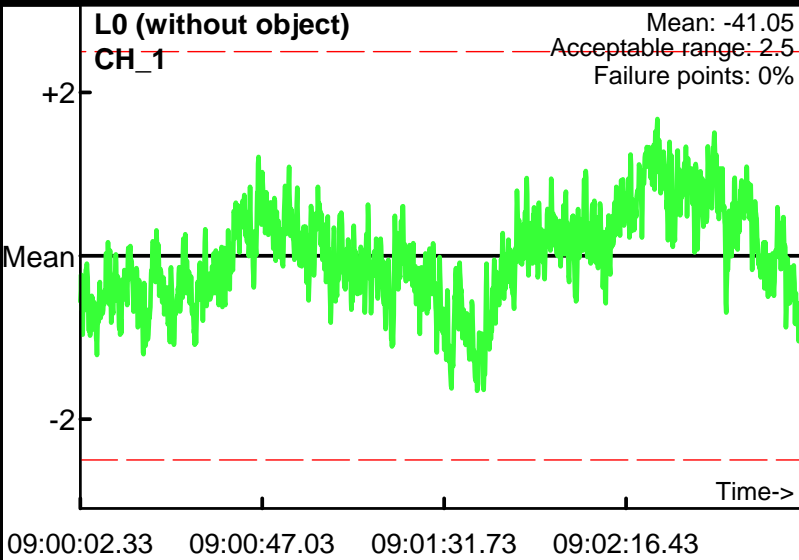# Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & EG
Date: 7/24/2009
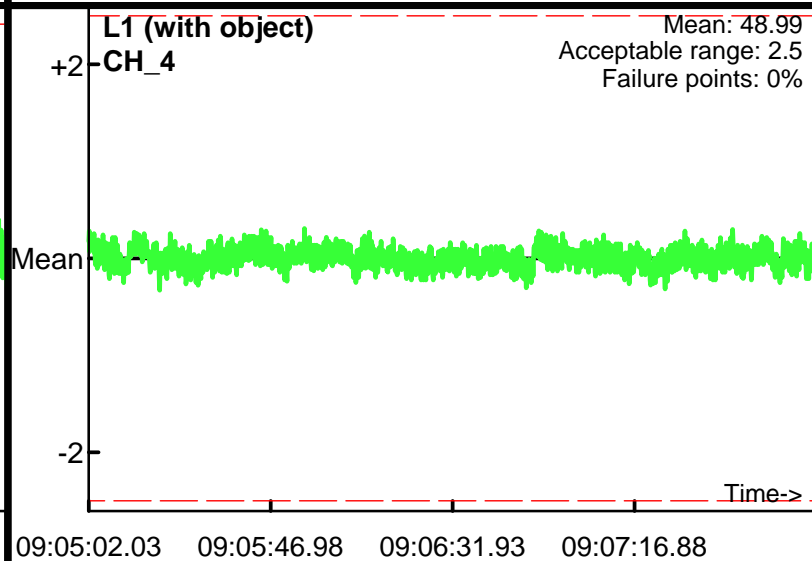

L7.2 (without object)
CH_3
Mean: 7.14
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_4
Mean: -1.13
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_3
Mean: 113.52
Acceptable range: 2.5
Failure points: 0%

L8.2 (with object)
CH_4
Mean: 52.62
Acceptable range: 2.5
Failure points: 0%

L9.2 (without object)
CH_3
Mean: 7.21
Acceptable range: 2.5
Failure points: 0%

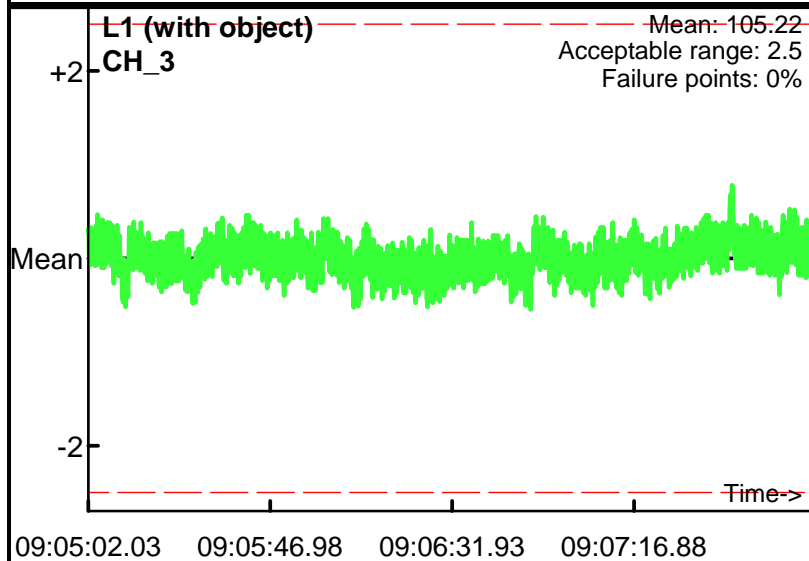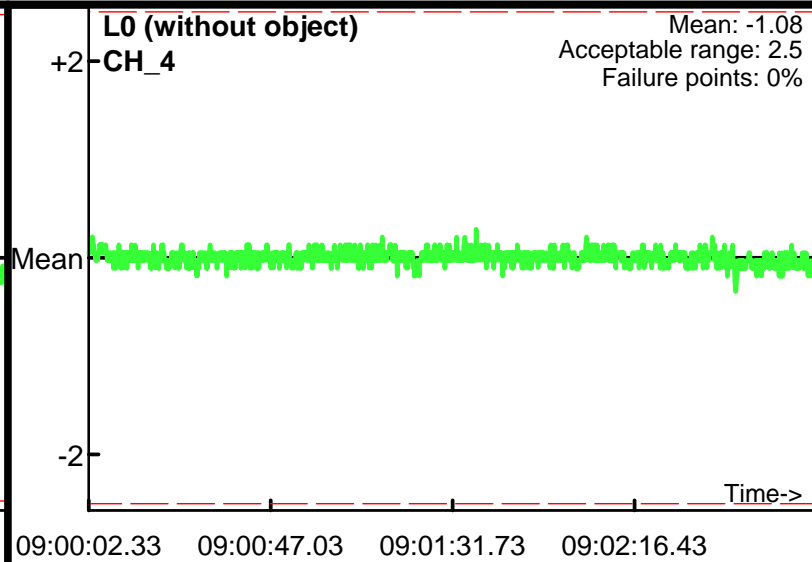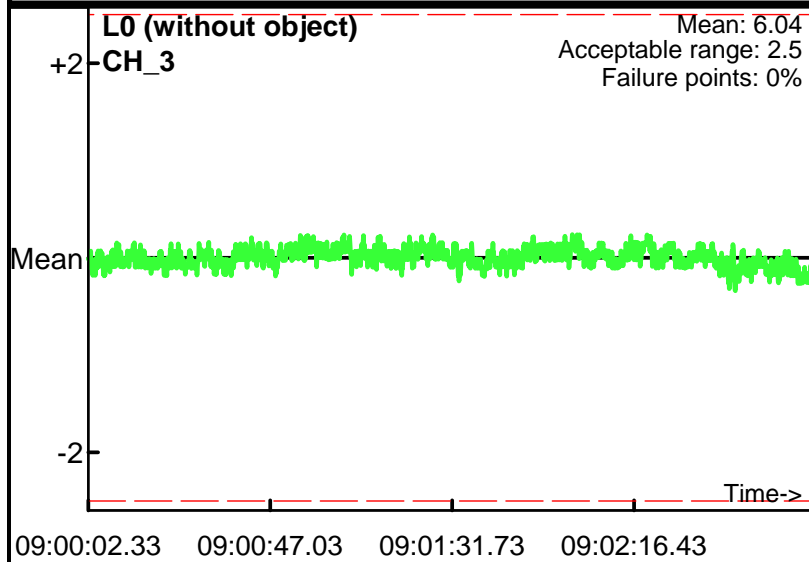L9.2 (without object)
CH_4
Mean: -1.07
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

AM test
Operator: BG & Butch
Date: 7/27/2009

L0 (without object)
CH_1
Mean: -41.05
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_2
Mean: 5.34
Acceptable range: 2.5
Failure points: 0%

09:00:02.33   09:00:47.03   09:01:31.73   09:02:16.43
09:00:02.33   09:00:47.03   09:01:31.73   09:02:16.43

L1 (with object)
CH_1
Mean: 191.95
Acceptable range: 2.5
Failure points: 0.0556%

L1 (with object)
CH_2
Mean: 169.43
Acceptable range: 2.5
Failure points: 0%

09:05:02.03   09:05:46.98   09:06:31.93   09:07:16.88
09:05:02.03   09:05:46.98   09:06:31.93   09:07:16.88

L2 (without object)
CH_1
Mean: -34.21
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_2
Mean: 7.67
Acceptable range: 2.5
Failure points: 0%

09:09:19.83   09:09:33.80   09:09:47.77   09:10:01.75   09:10
09:09:19.83   09:09:33.80   09:09:47.77   09:10:01.75   09:10

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
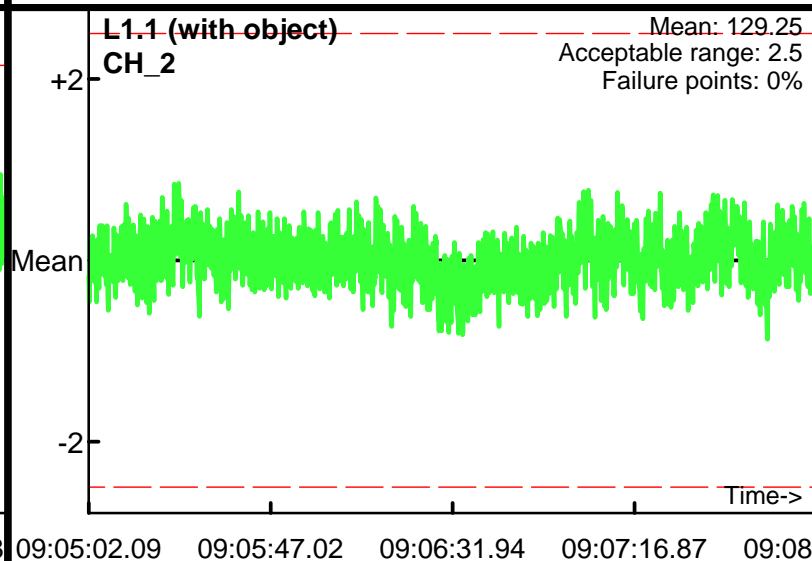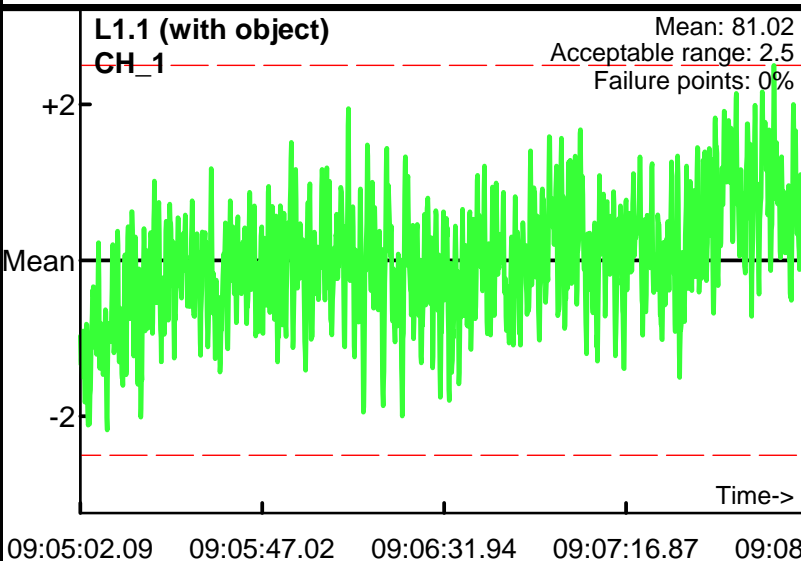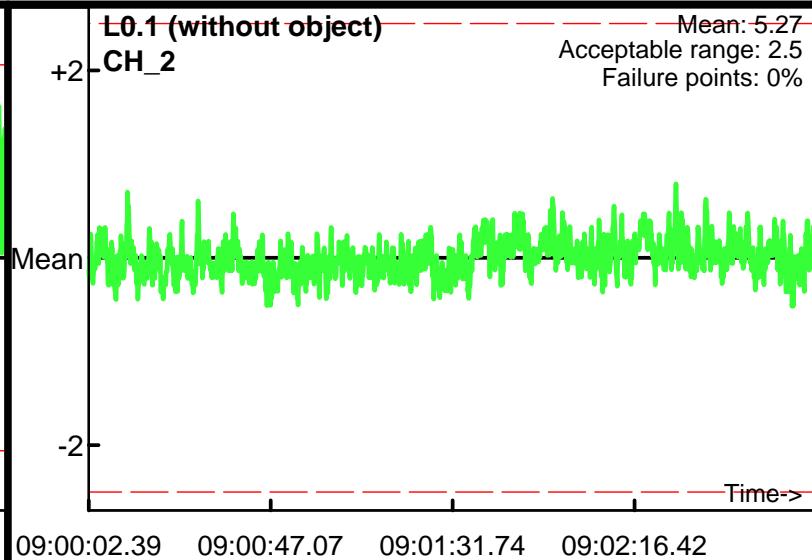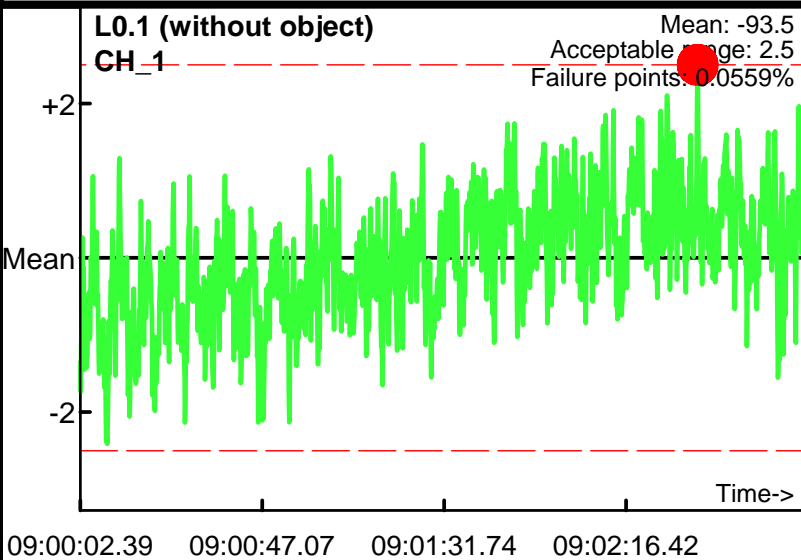Line Name: L0 L1 L2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & Butch
Date: 7/27/2009

L0 (without object)
CH_3
Mean: 6.04
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_4
Mean: -1.08
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_3
Mean: 105.22
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_4
Mean: 48.99
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_3
Mean: 6.7
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
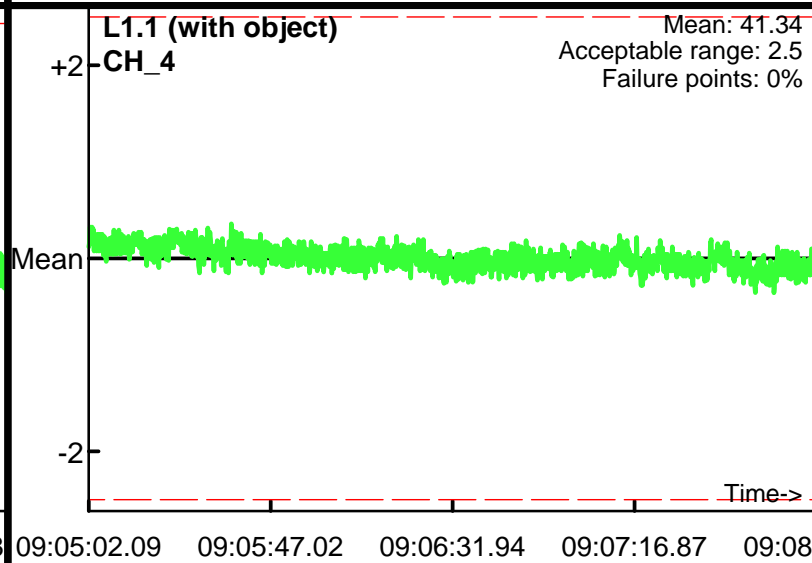CH_4
Mean: -1
Acceptable range: 2.5
Failure points: 0%

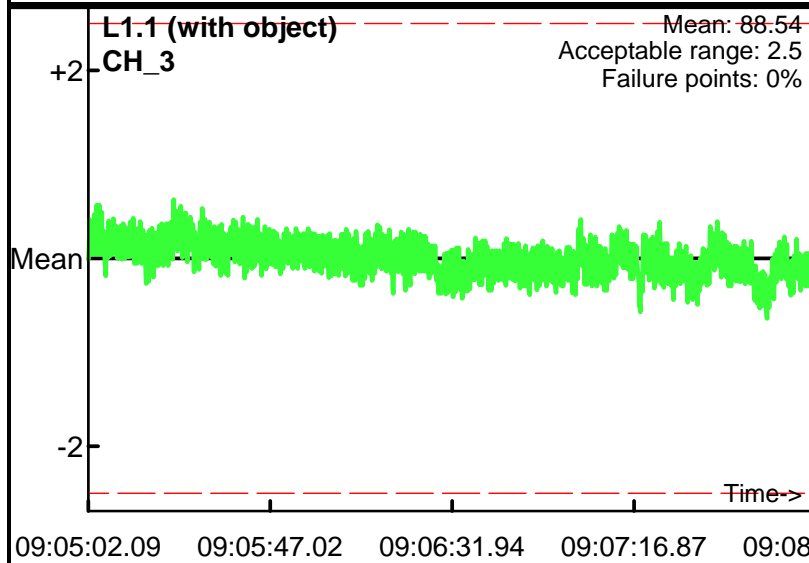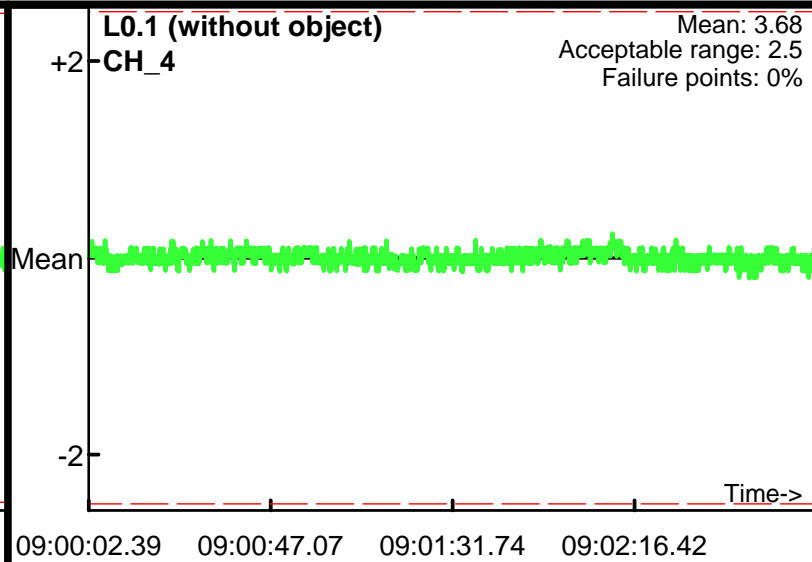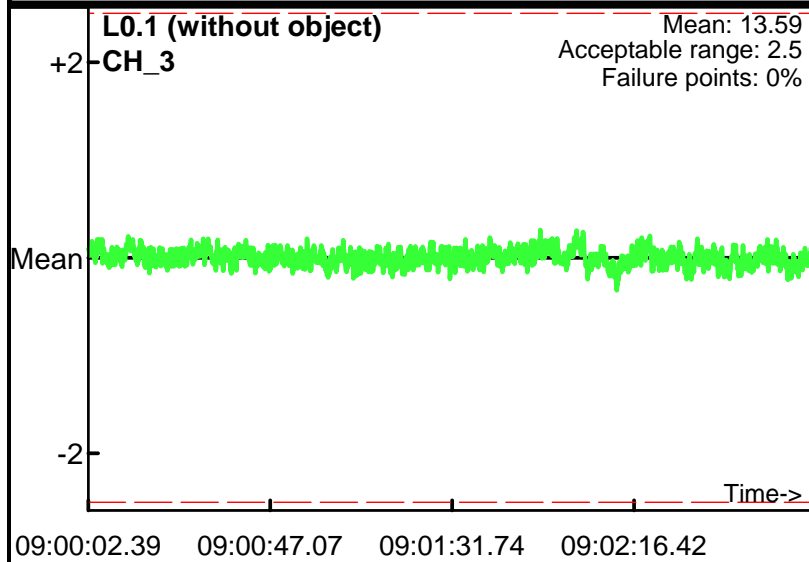# Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & Butch
Date: 7/27/2009

L0.1 (without object)
CH_1
Mean: -93.5
Acceptable range: 2.5
Failure points: 0.0559%

L0.1 (without object)
CH_2
Mean: 5.27
Acceptable range: 2.5
Failure points: 0%

Time->

09:00:02.39   09:00:47.07   09:01:31.74   09:02:16.42
09:00:02.39   09:00:47.07   09:01:31.74   09:02:16.42

L1.1 (with object)
CH_1
Mean: 81.02
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_2
Mean: 129.25
Acceptable range: 2.5
Failure points: 0%

Time->

09:05:02.09   09:05:47.02   09:06:31.94   09:07:16.87   09:08
09:05:02.09   09:05:47.02   09:06:31.94   09:07:16.87   09:08

L2.1 (without object)
CH_1
Mean: -90.24
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_2
Mean: 5.8
Acceptable range: 2.5
Failure points: 0%

Time->

09:09:19.80   09:09:33.77   09:09:47.75   09:10:01.73
09:09:19.80   09:09:33.77   09:09:47.75   09:10:01.73

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
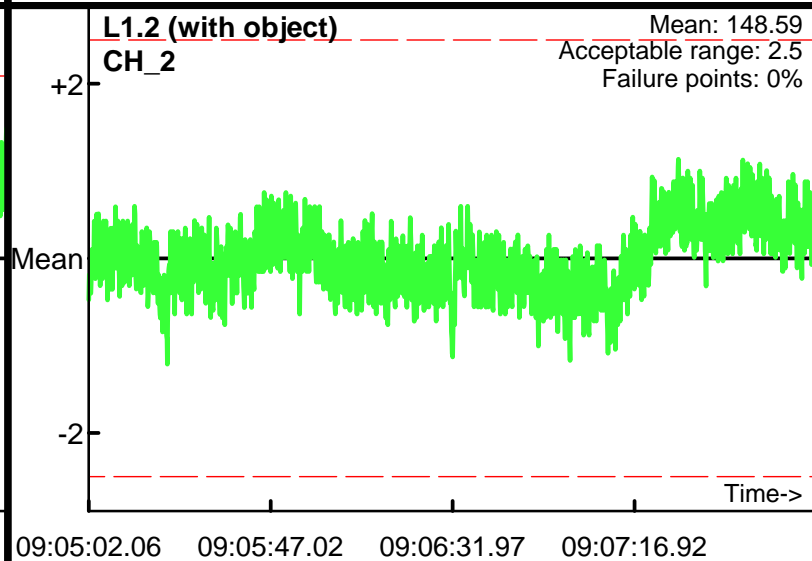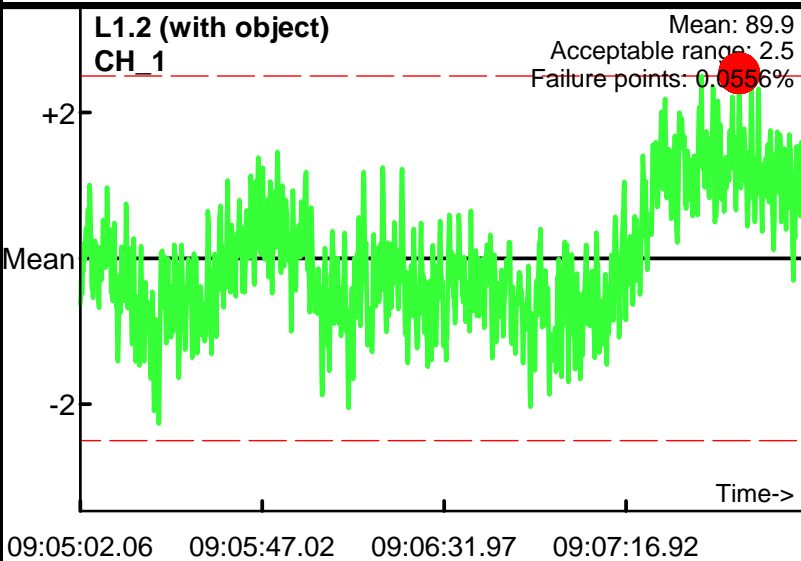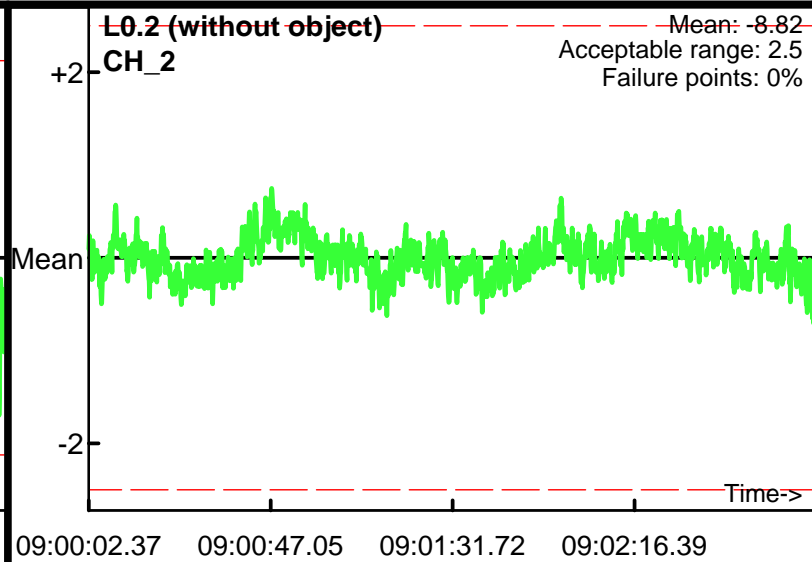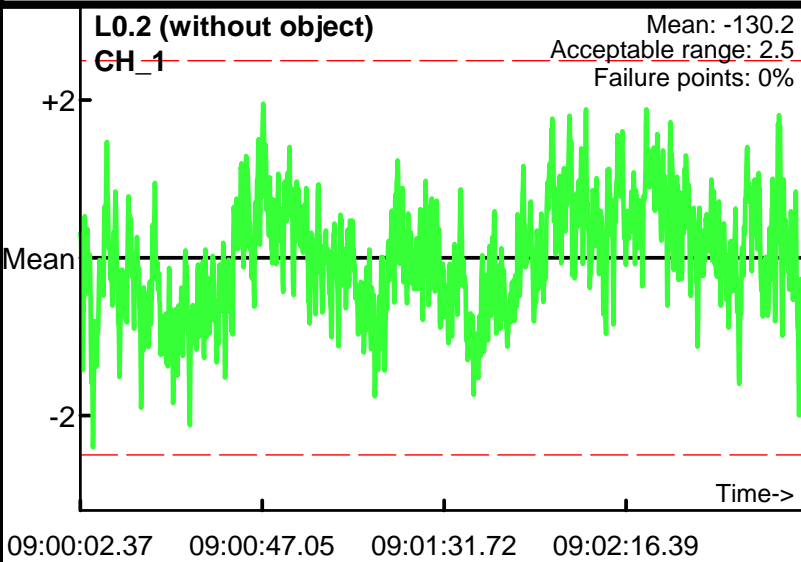Grid/Location: QC Area

● Outside range
-- -- Acceptable limits

AM test
Operator: BG & Butch
Date: 7/27/2009

L0.1 (without object)
CH_3
Mean: 13.59
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
09:00:02.39   09:00:47.07   09:01:31.74   09:02:16.42

L0.1 (without object)
CH_4
Mean: 3.68
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
09:00:02.39   09:00:47.07   09:01:31.74   09:02:16.42

L1.1 (with object)
CH_3
Mean: 88.54
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
09:05:02.09   09:05:47.02   09:06:31.94   09:07:16.87   09:08

L1.1 (with object)
CH_4
Mean: 41.34
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
09:05:02.09   09:05:47.02   09:06:31.94   09:07:16.87   09:08

L2.1 (without object)
CH_3
Mean: 13.54
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
09:09:19.80   09:09:33.77   09:09:47.75   09:10:01.73

L2.1 (without object)
CH_4
Mean: 3.55
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
09:09:19.80   09:09:33.77   09:09:47.75   09:10:01.73

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
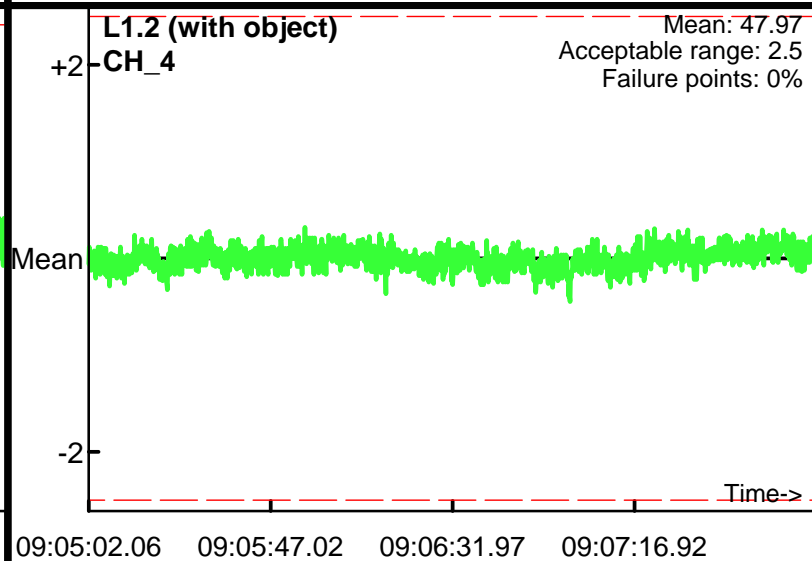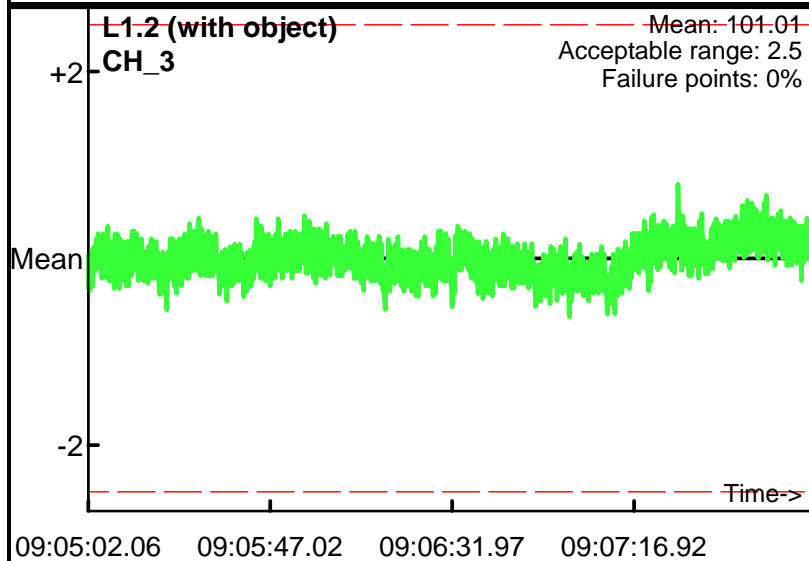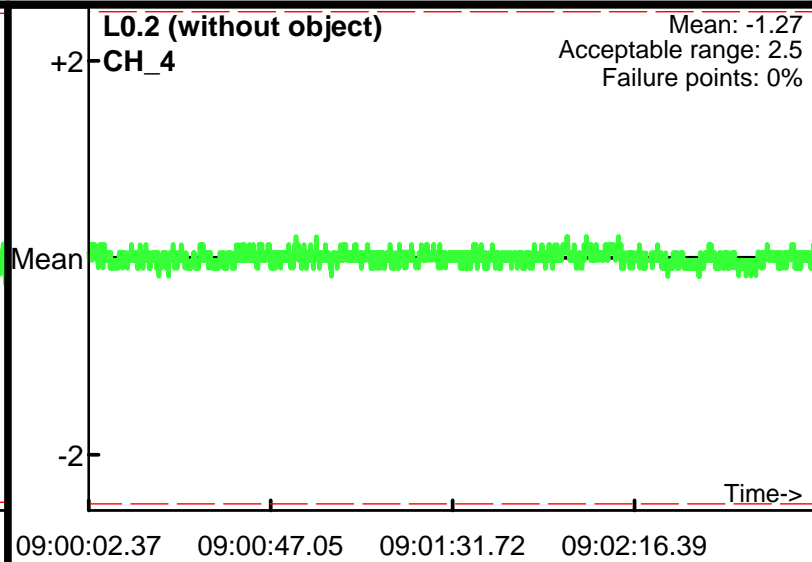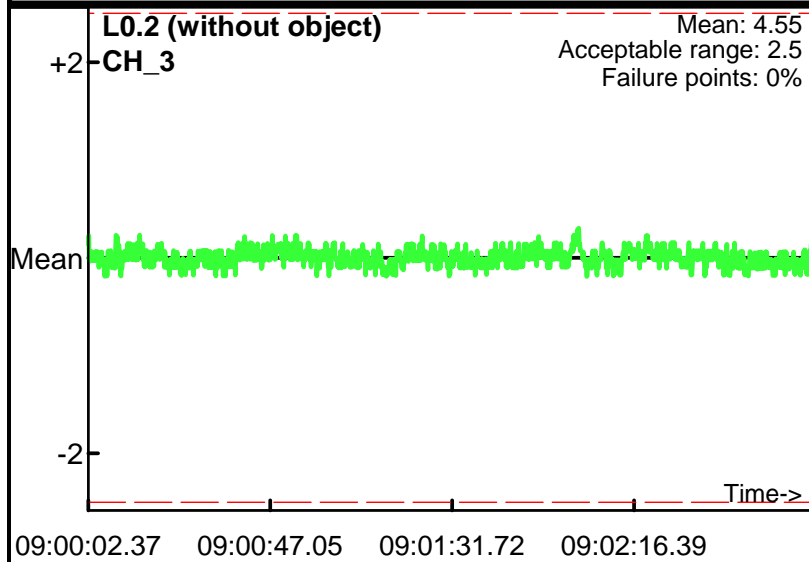Line Name: L0.1 L1.1 L2.1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
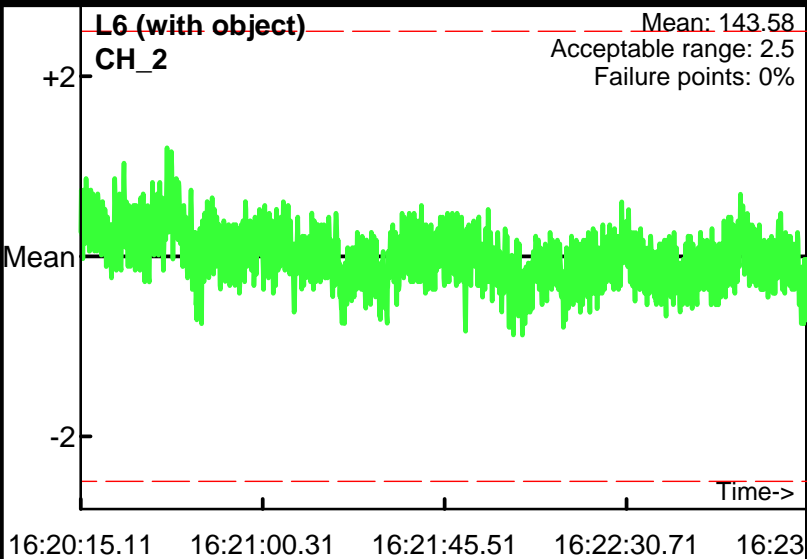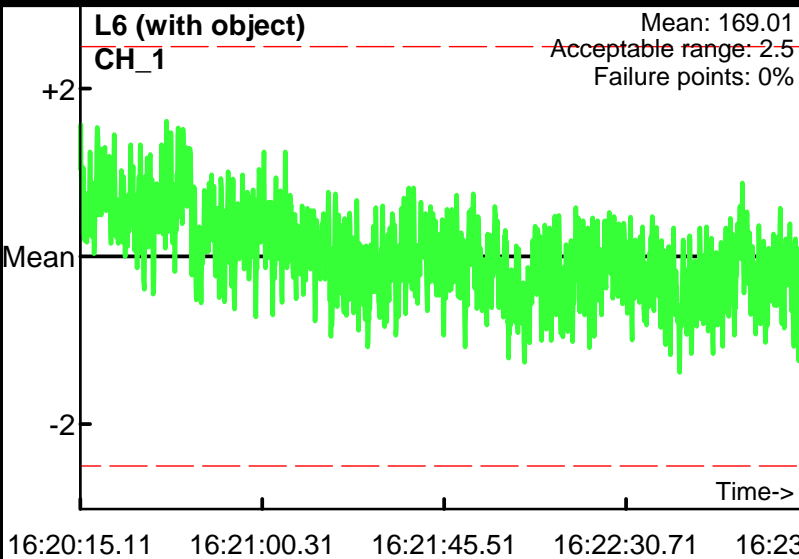Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & Butch
Date: 7/27/2009

L0.2 (without object)
CH_1
Mean: -130.2
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:00:02.37   09:00:47.05   09:01:31.72   09:02:16.39

L0.2 (without object)
CH_2
Mean: -8.82
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:00:02.37   09:00:47.05   09:01:31.72   09:02:16.39

L1.2 (with object)
CH_1
Mean: 89.9
Acceptable range: 2.5
Failure points: 0.0556%

+2
Mean
-2
Time->

09:05:02.06   09:05:47.02   09:06:31.97   09:07:16.92

L1.2 (with object)
CH_2
Mean: 148.59
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:05:02.06   09:05:47.02   09:06:31.97   09:07:16.92

L2.2 (without object)
CH_1
Mean: -121.82
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:09:19.88   09:09:33.82   09:09:47.77   09:10:01.72   09:10

L2.2 (without object)
CH_2
Mean: -6.56
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:09:19.88   09:09:33.82   09:09:47.77   09:10:01.72   09:10

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 1

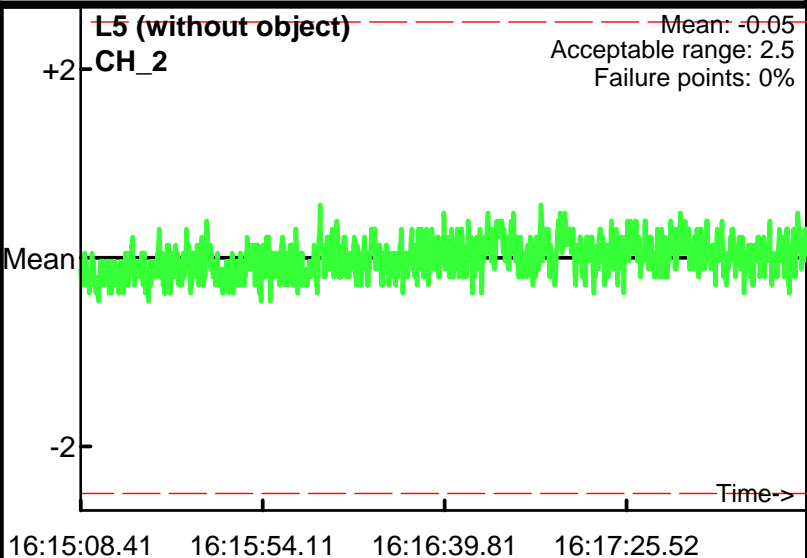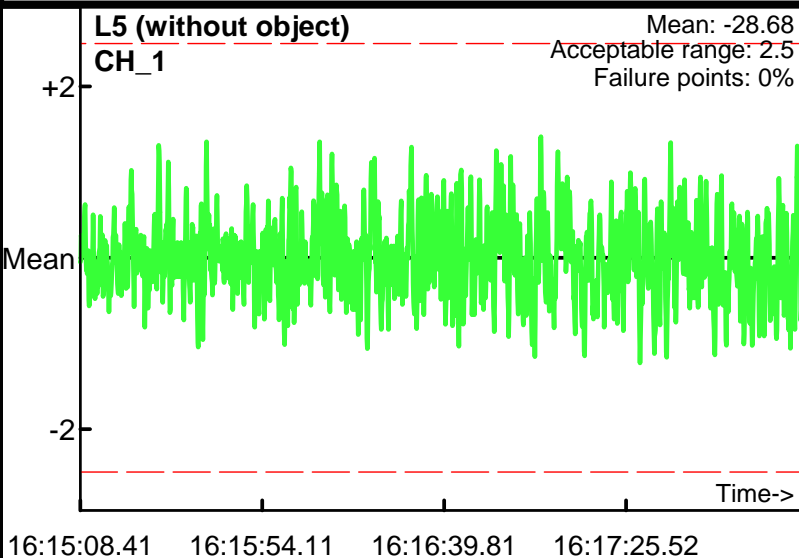# Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & Butch
Date: 7/27/2009
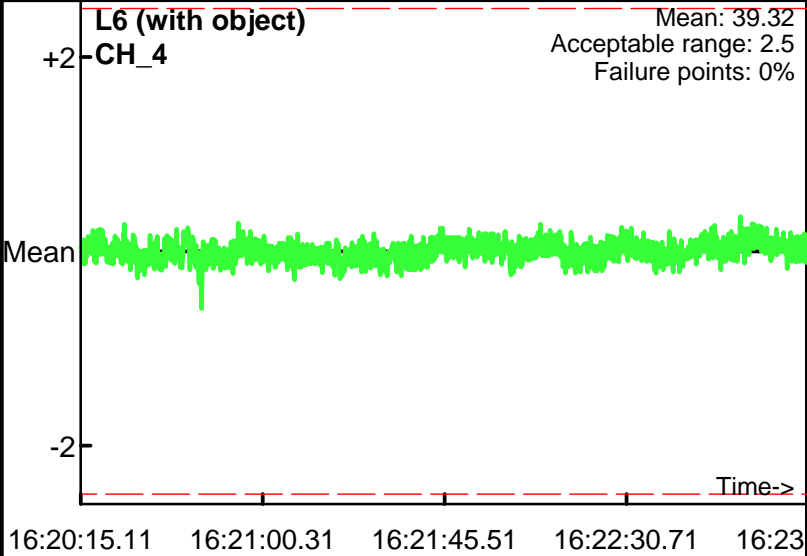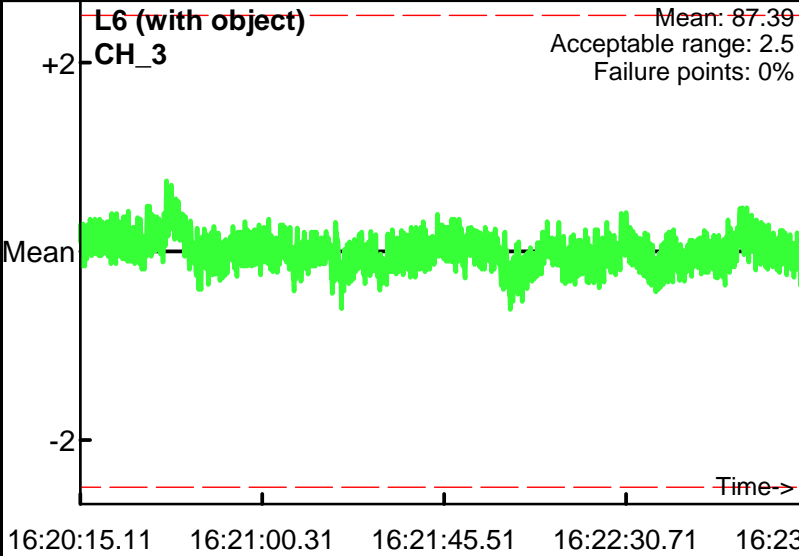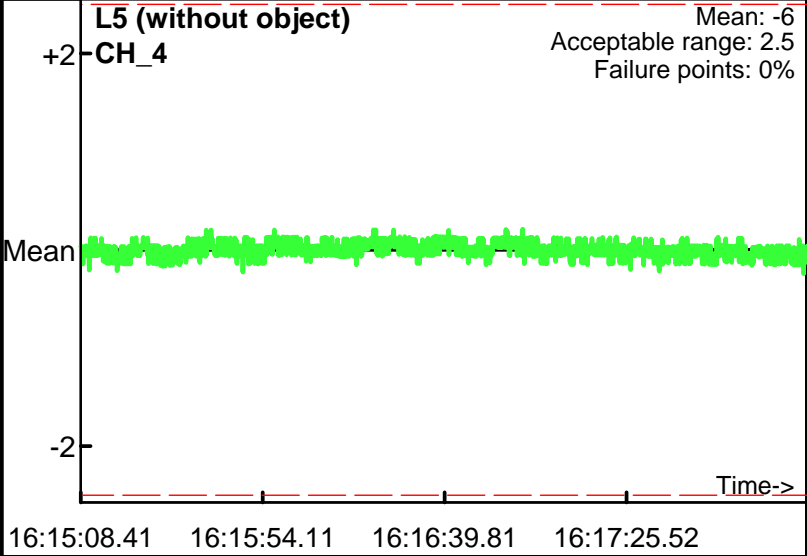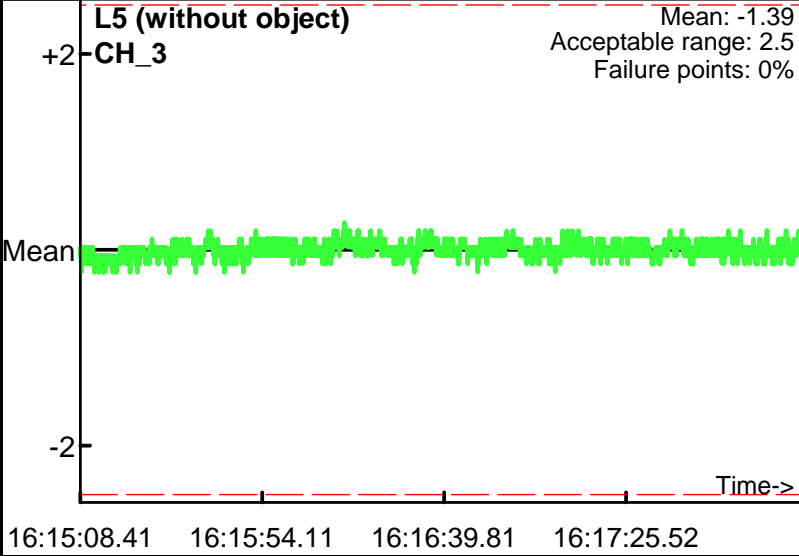

L0.2 (without object)
CH_3
Mean: 4.55
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:00:02.37   09:00:47.05   09:01:31.72   09:02:16.39

L0.2 (without object)
CH_4
Mean: -1.27
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:00:02.37   09:00:47.05   09:01:31.72   09:02:16.39

L1.2 (with object)
CH_3
Mean: 101.01
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:05:02.06   09:05:47.02   09:06:31.97   09:07:16.92

L1.2 (with object)
CH_4
Mean: 47.97
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:05:02.06   09:05:47.02   09:06:31.97   09:07:16.92

L2.2 (without object)
CH_3
Mean: 5.04
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:09:19.88   09:09:33.82   09:09:47.77   09:10:01.72   09:10

L2.2 (without object)
CH_4
Mean: -1.14
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:09:19.88   09:09:33.82   09:09:47.77   09:10:01.72   09:10

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
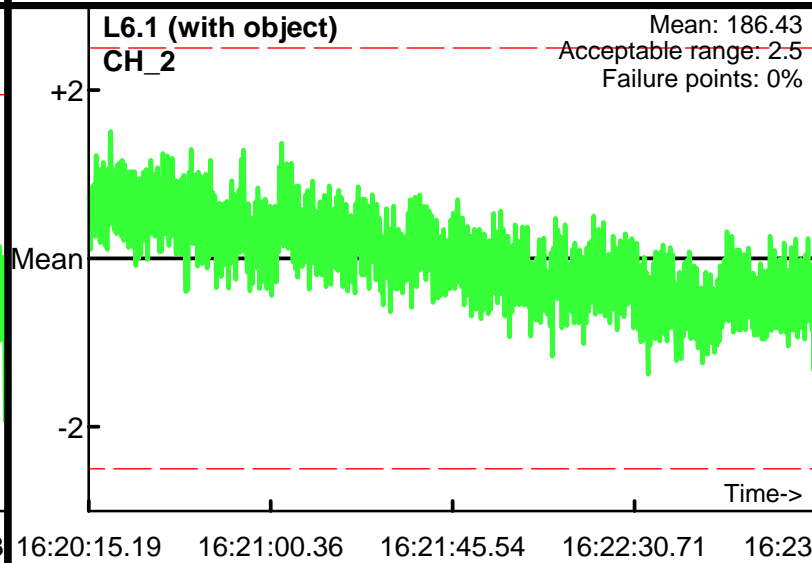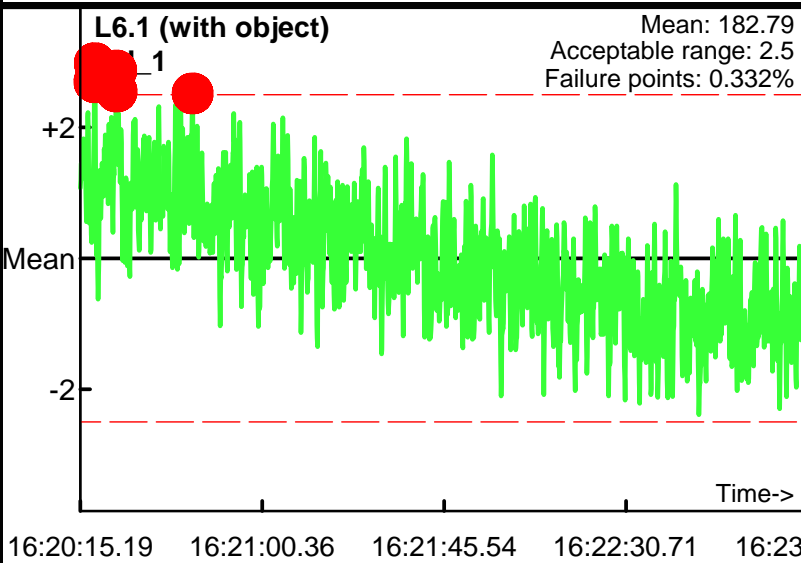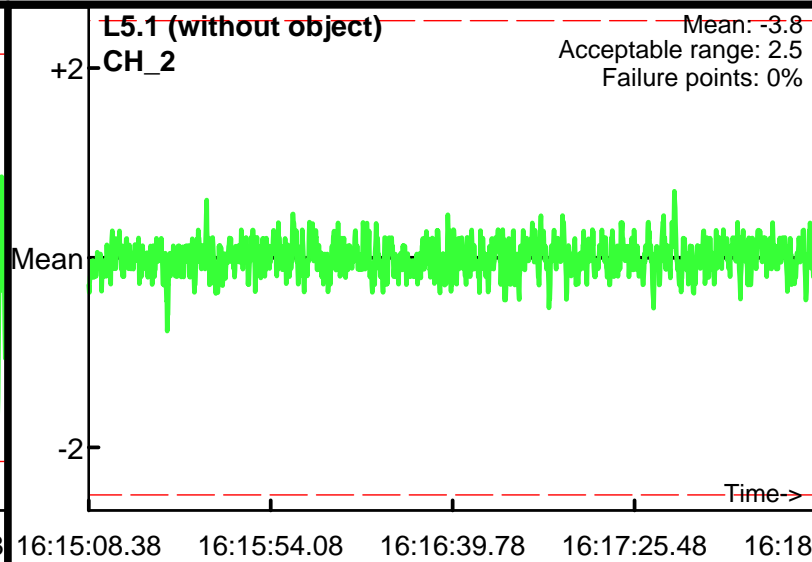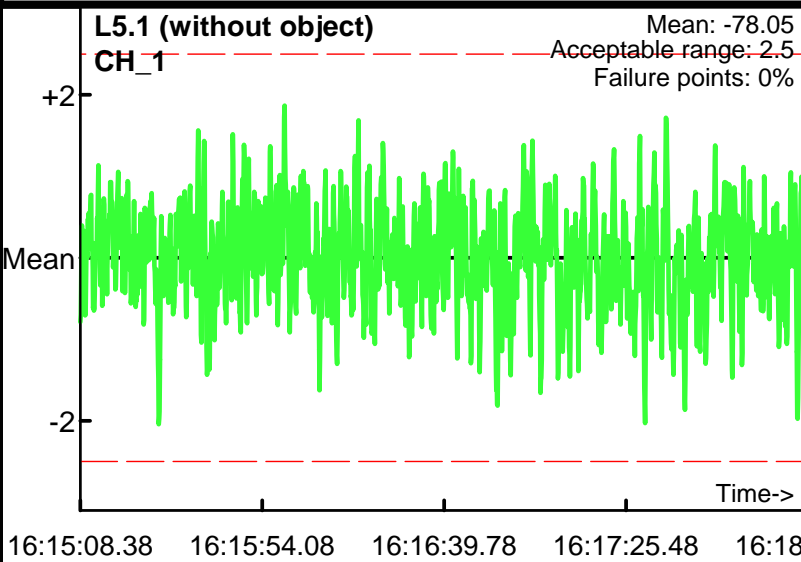Grid/Location: QC Area

🔴 Outside range
--- Acceptable limits

PM test
Operator: BG & Butch
Date: 7/27/2009

L5 (without object)
CH_1
Mean: -28.68
Acceptable range: 2.5
Failure points: 0%

L5 (without object)
CH_2
Mean: -0.05
Acceptable range: 2.5
Failure points: 0%

L6 (with object)
CH_1
Mean: 169.01
Acceptable range: 2.5
Failure points: 0%

L6 (with object)
CH_2
Mean: 143.58
Acceptable range: 2.5
Failure points: 0%

L7 (without object)
CH_1
Mean: -28.71
Acceptable range: 2.5
Failure points: 0%

L7 (without object)
CH_2
Mean: 0.11
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
Line Name: L5 L6 L7

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & Butch
Date: 7/27/2009
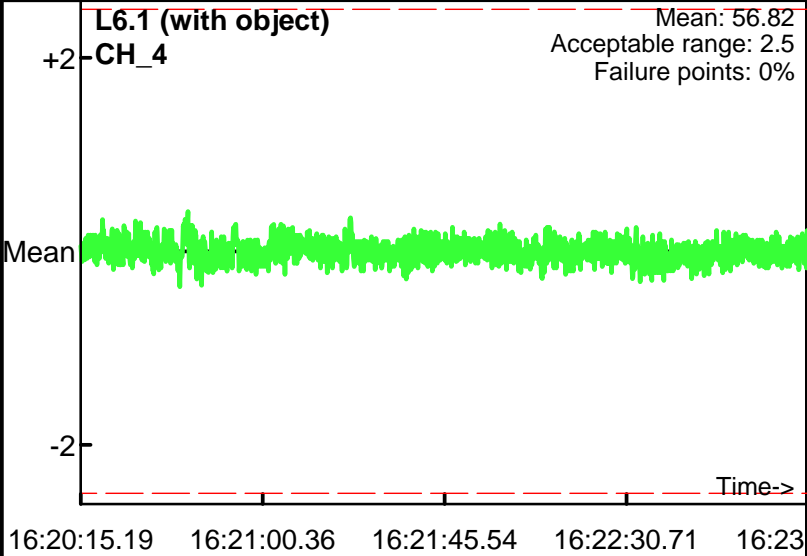
	L5 (without object) CH_3	Mean: -1.39, Acceptable range: 2.5, Failure points: 0%
L5 (without object) CH_4	Mean: -6, Acceptable range: 2.5, Failure points: 0%
L6 (with object) CH_3	Mean: 87.39, Acceptable range: 2.5, Failure points: 0%
L6 (with object) CH_4	Mean: 39.32, Acceptable range: 2.5, Failure points: 0%
L7 (without object) CH_3	Mean: -1.31, Acceptable range: 2.5, Failure points: 0%
L7 (without object) CH_4	Mean: -6.08, Acceptable range: 2.5, Failure points: 0%

Time->

16:15:08.41   16:15:54.11   16:16:39.81   16:17:25.52

16:20:15.11   16:21:00.31   16:21:45.51   16:22:30.71   16:23
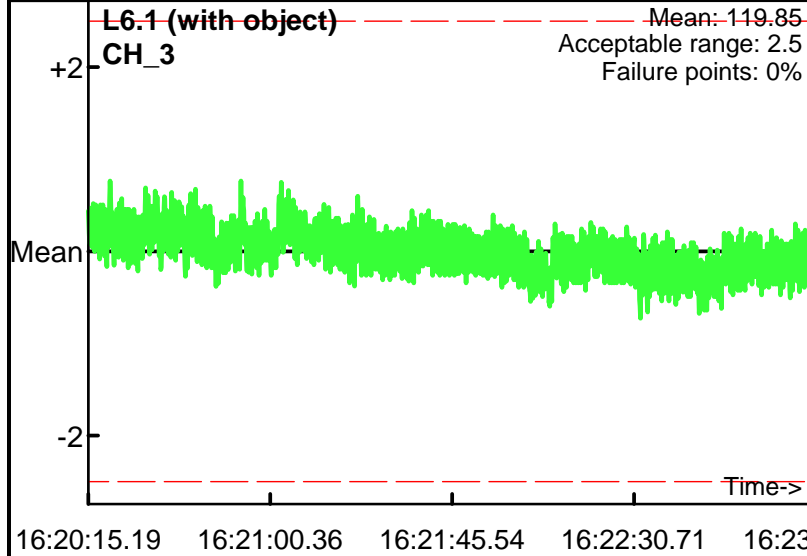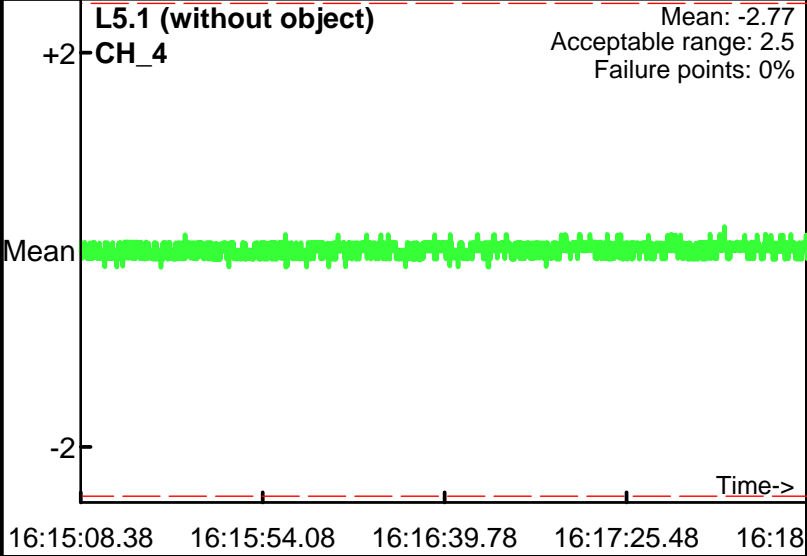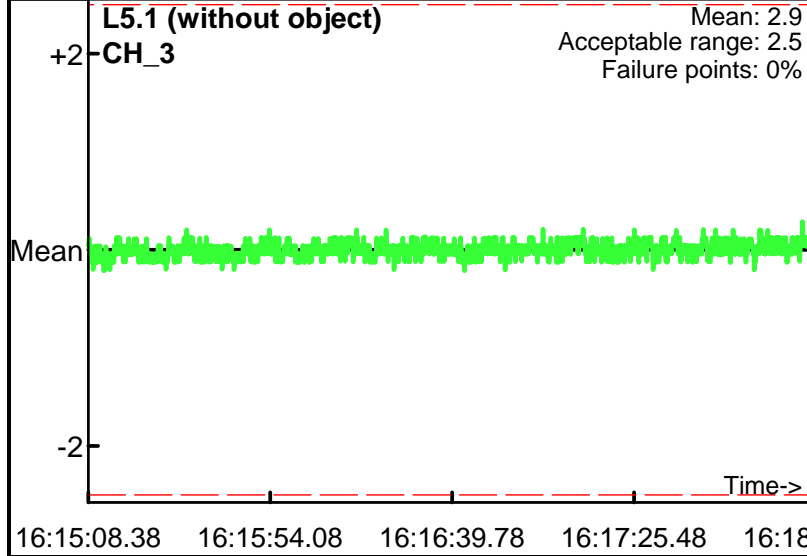
16:23:55.91   16:24:10.38   16:24:24.86   16:24:39.34

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
‒ ‒ ‒ Acceptable limits

PM test
Operator: BG & Butch
Date: 7/27/2009

L5.1 (without object)
CH_1
Mean: -78.05
Acceptable range: 2.5
Failure points: 0%

16:15:08.38 — 16:15:54.08 — 16:16:39.78 — 16:17:25.48 — 16:18

L5.1 (without object)
CH_2
Mean: -3.8
Acceptable range: 2.5
Failure points: 0%

16:15:08.38 — 16:15:54.08 — 16:16:39.78 — 16:17:25.48 — 16:18

L6.1 (with object)
CH_1
Mean: 182.79
Acceptable range: 2.5
Failure points: 0.332%

16:20:15.19 — 16:21:00.36 — 16:21:45.54 — 16:22:30.71 — 16:23

L6.1 (with object)
CH_2
Mean: 186.43
Acceptable range: 2.5
Failure points: 0%

16:20:15.19 — 16:21:00.36 — 16:21:45.54 — 16:22:30.71 — 16:23

L7.1 (without object)
CH_1
Mean: -78.74
Acceptable range: 2.5
Failure points: 0%

16:23:55.89 — 16:24:10.36 — 16:24:24.84 — 16:24:39.31

L7.1 (without object)
CH_2
Mean: -3.95
Acceptable range: 2.5
Failure points: 0%

16:23:55.89 — 16:24:10.36 — 16:24:24.84 — 16:24:39.31

Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
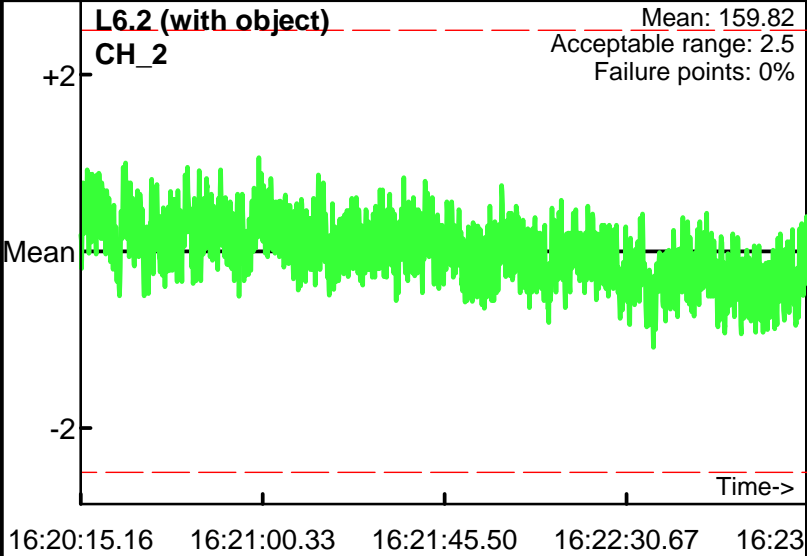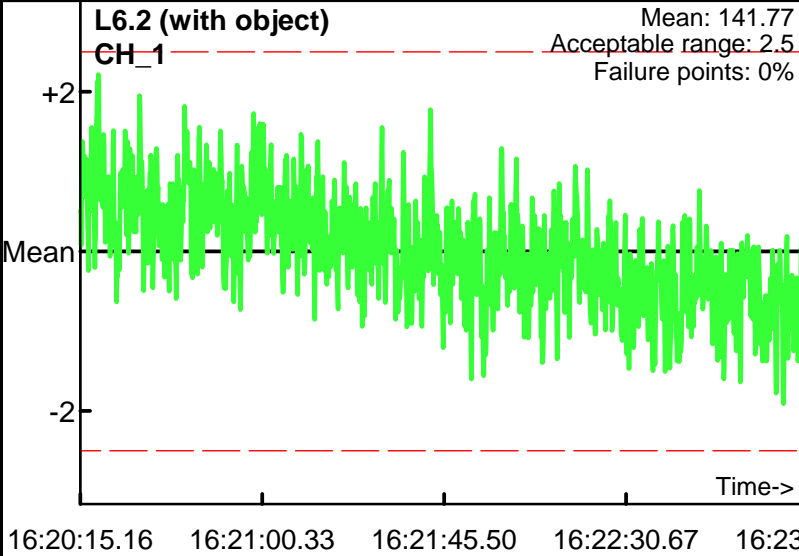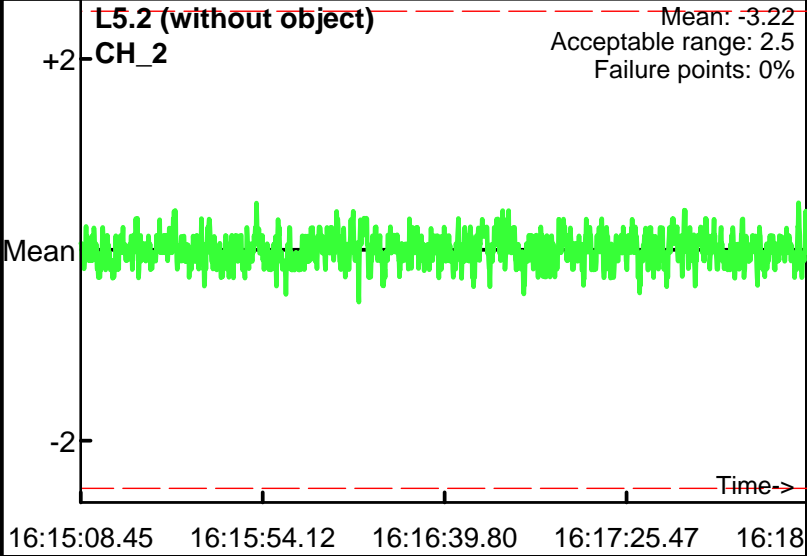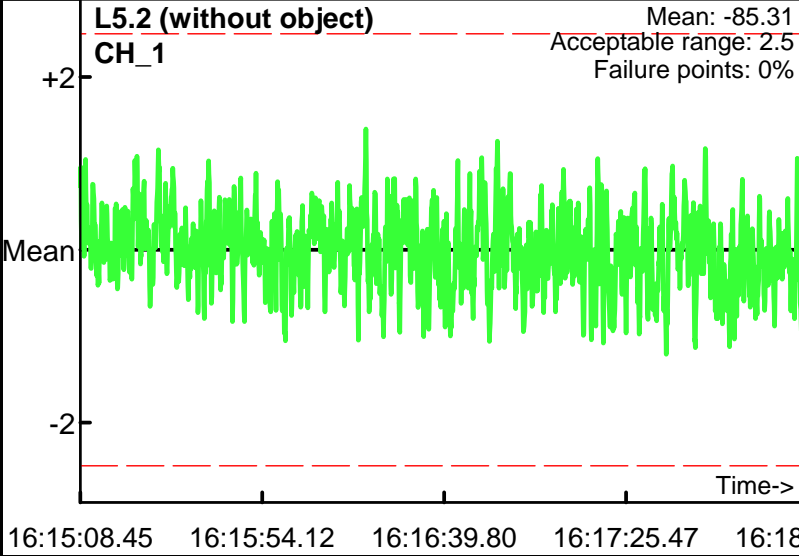Line Name: L5.1 L6.1 L7.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & Butch
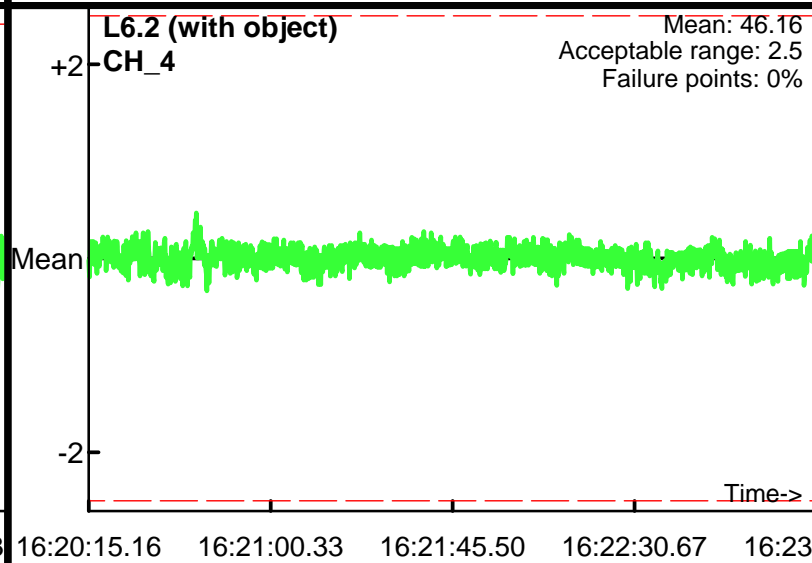Date: 7/27/2009

L5.1 (without object)
CH_3

Mean: 2.9
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:08.38   16:15:54.08   16:16:39.78   16:17:25.48   16:18

L5.1 (without object)
CH_4

Mean: -2.77
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:08.38   16:15:54.08   16:16:39.78   16:17:25.48   16:18

L6.1 (with object)
CH_3

Mean: 119.85
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:20:15.19   16:21:00.36   16:21:45.54   16:22:30.71   16:23

L6.1 (with object)
CH_4

Mean: 56.82
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:20:15.19   16:21:00.36   16:21:45.54   16:22:30.71   16:23

L7.1 (without object)
CH_3

Mean: 2.9
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:23:55.89   16:24:10.36   16:24:24.84   16:24:39.31

L7.1 (without object)
CH_4

Mean: -2.87
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:23:55.89   16:24:10.36   16:24:24.84   16:24:39.31

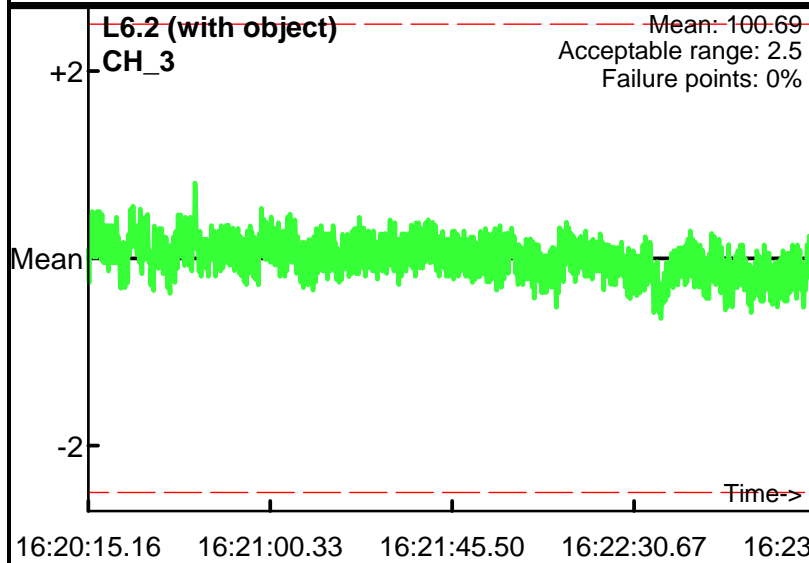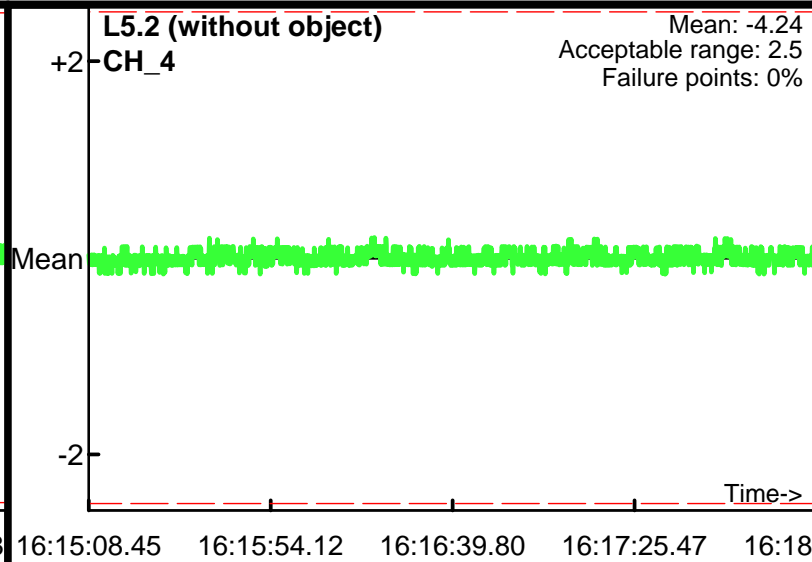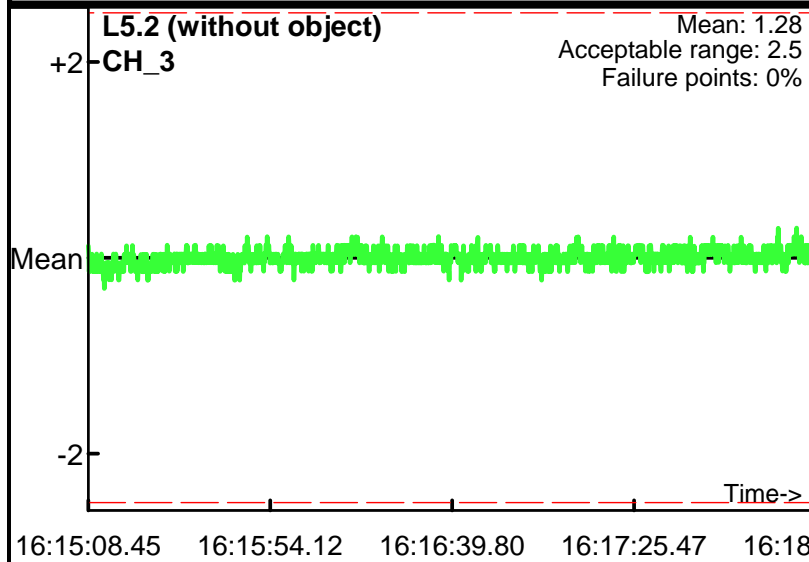Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
Line Name: L5.1 L6.1 L7.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
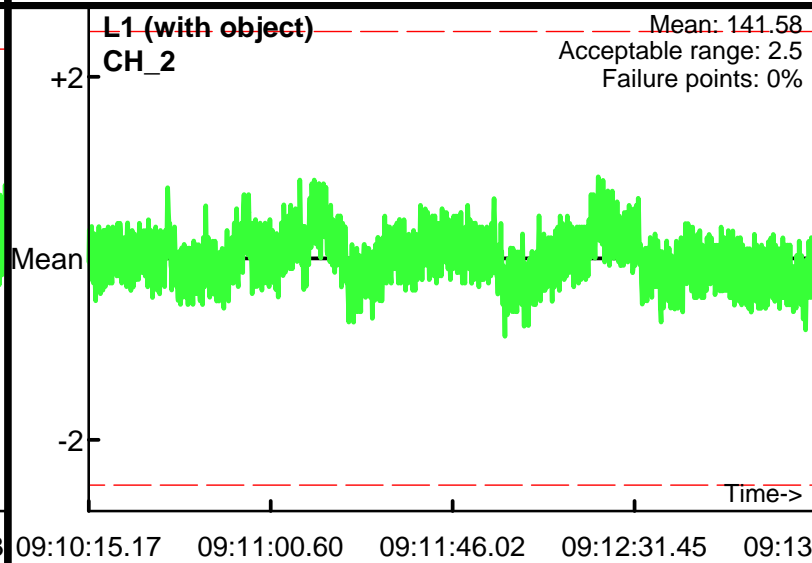Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & Butch
Date: 7/27/2009

L5.2 (without object)
CH_1
Mean: -85.31
Acceptable range: 2.5
Failure points: 0%

L5.2 (without object)
CH_2
Mean: -3.22
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_1
Mean: 141.77
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_2
Mean: 159.82
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_1
Mean: -85.99
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_2
Mean: -3.17
Acceptable range: 2.5
Failure points: 0%

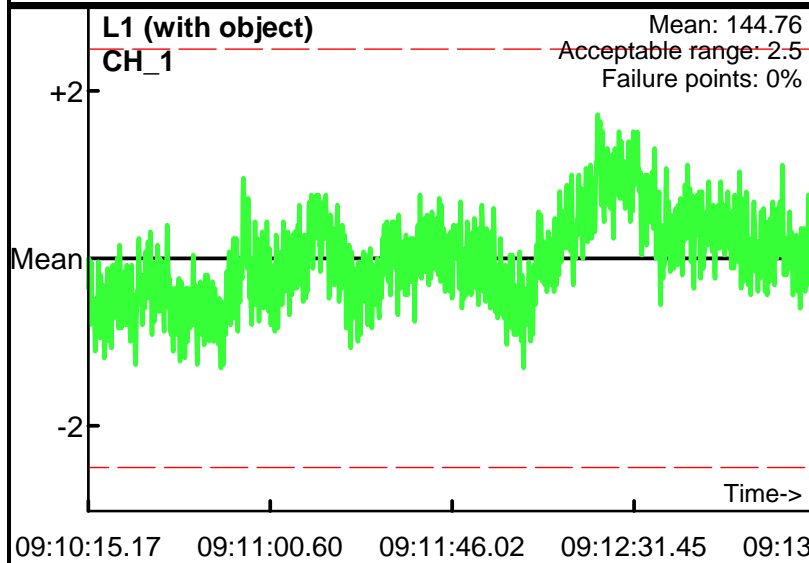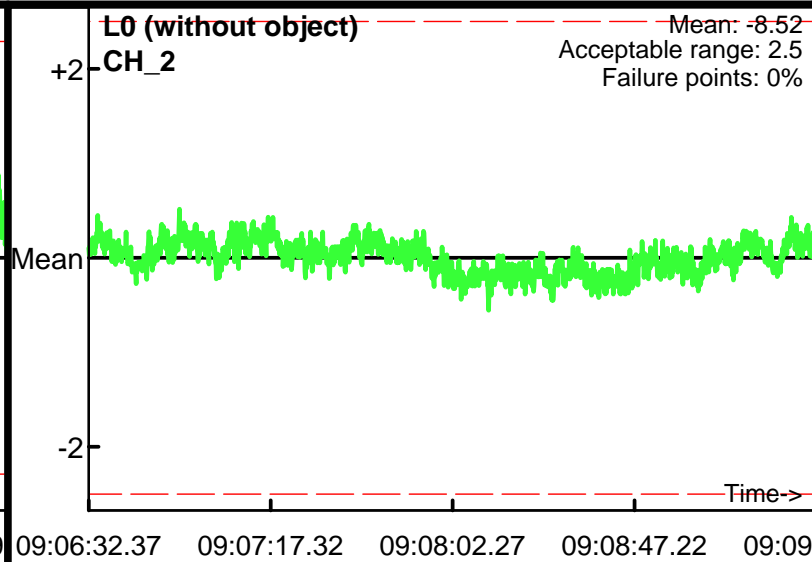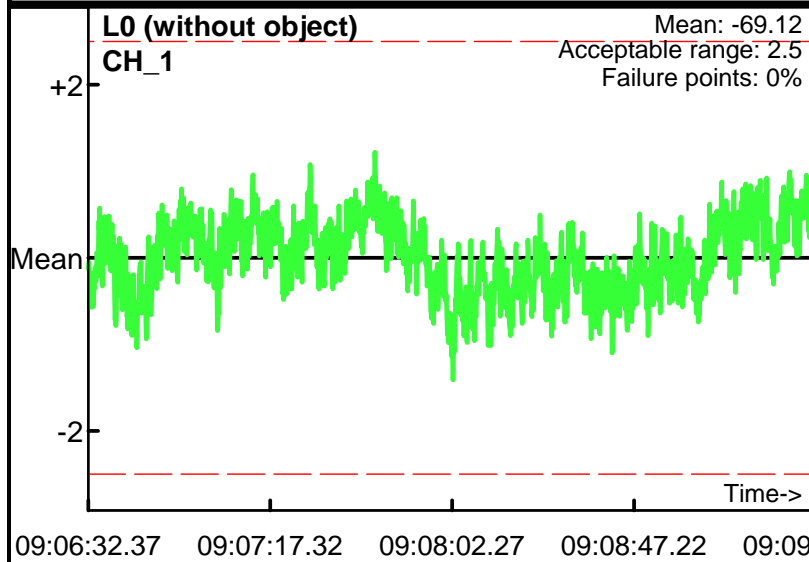Database: C:_QCReports_Ord_Data\072709\QC\072709_TA_QC.gdb
Line Name: L5.2 L6.2 L7.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
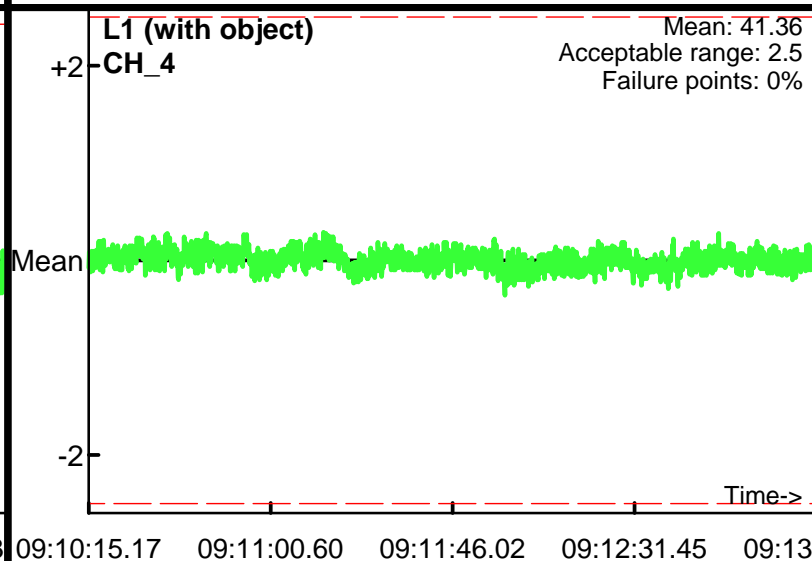Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & Butch
Date: 7/27/2009

L5.2 (without object)
CH_3
Mean: 1.28
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:08.45   16:15:54.12   16:16:39.80   16:17:25.47   16:18

L5.2 (without object)
CH_4
Mean: -4.24
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:08.45   16:15:54.12   16:16:39.80   16:17:25.47   16:18

L6.2 (with object)
CH_3
Mean: 100.69
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:20:15.16   16:21:00.33   16:21:45.50   16:22:30.67   16:23

L6.2 (with object)
CH_4
Mean: 46.16
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:20:15.16   16:21:00.33   16:21:45.50   16:22:30.67   16:23

L7.2 (without object)
CH_3
Mean: 1.38
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:23:55.95   16:24:10.43   16:24:24.90   16:24:39.37

L7.2 (without object)
CH_4
Mean: -4.2
Acceptable range: 2.5
Failure points: 0%

+2
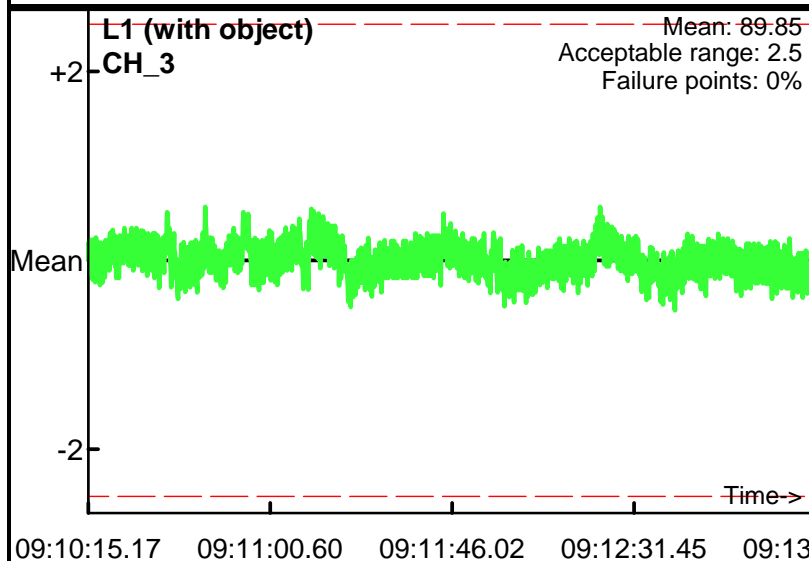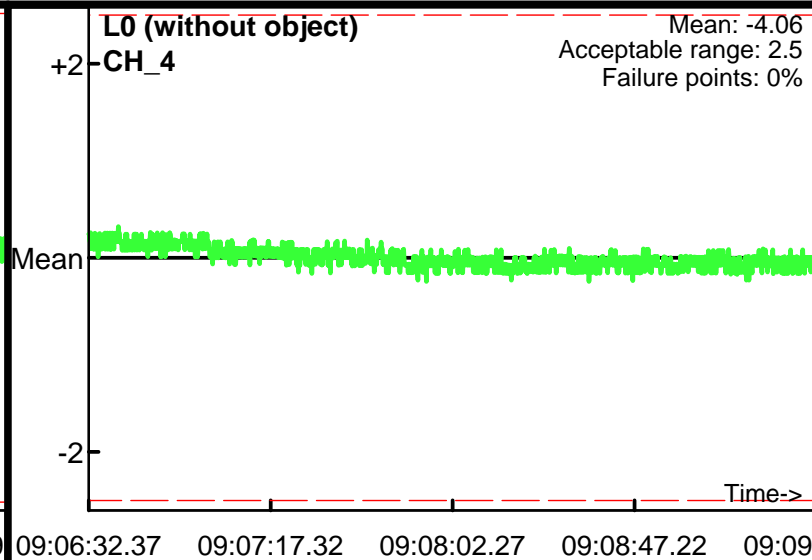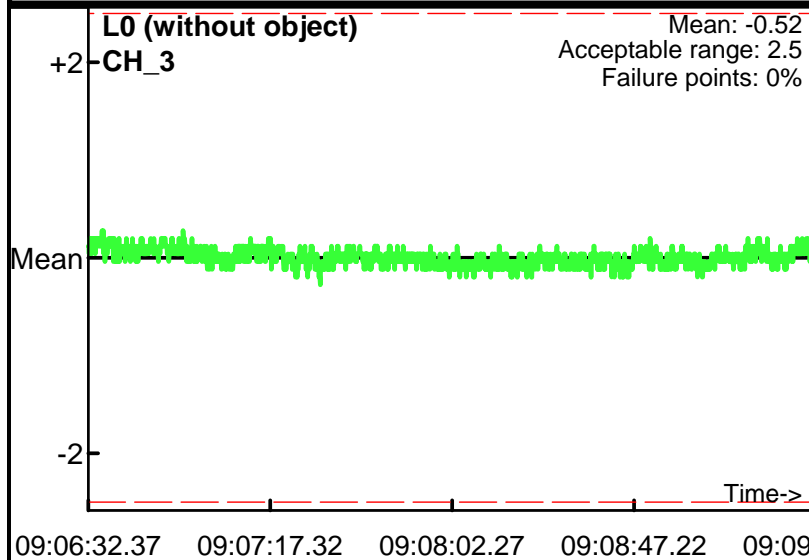Mean
-2
Time->

16:23:55.95   16:24:10.43   16:24:24.90   16:24:39.37

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & BS
Date: 7/28/2009

L0 (without object)
CH_1
Mean: -69.12
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_2
Mean: -8.52
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_1
Mean: 144.76
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_2
Mean: 141.58
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_1
Mean: -65.24
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_2
Mean: -7.93
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
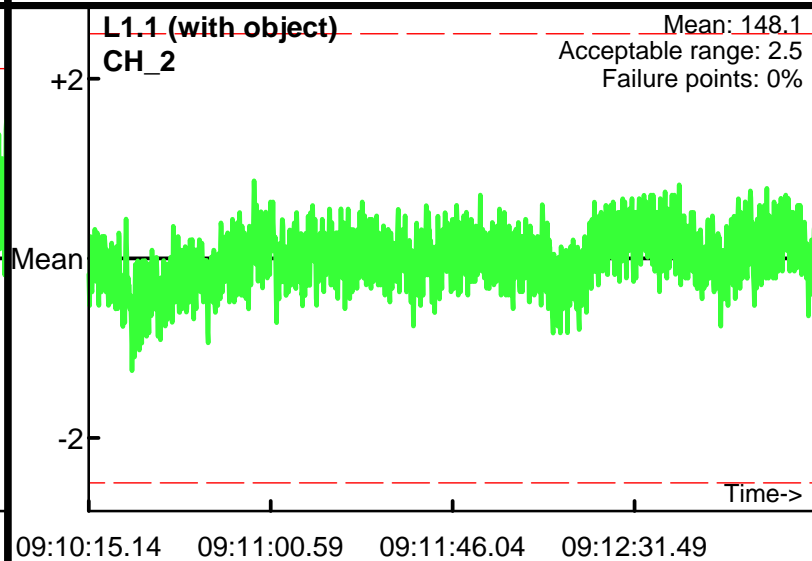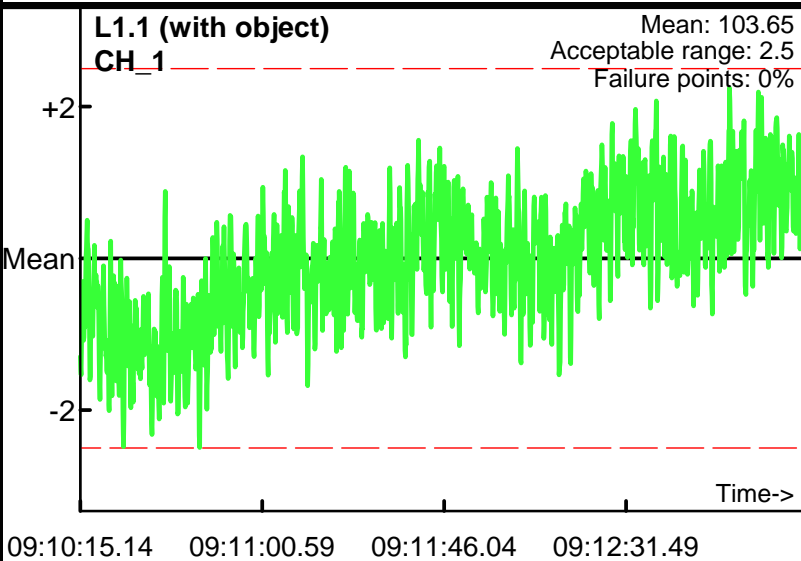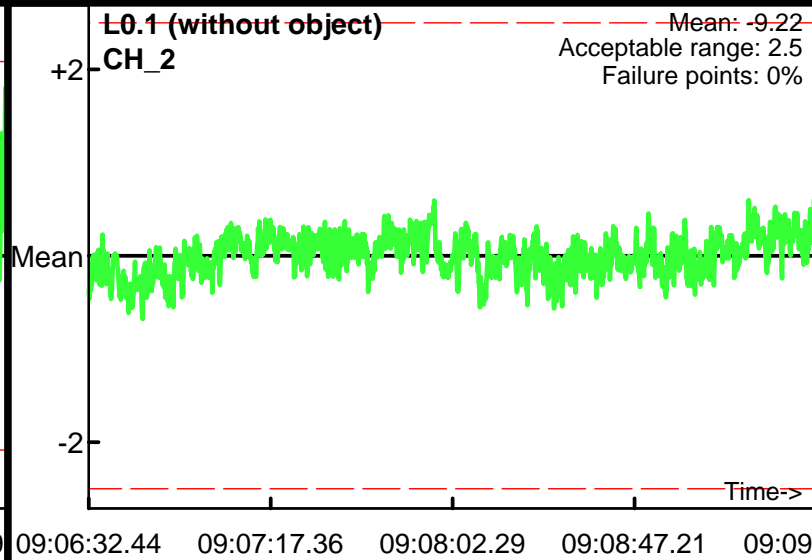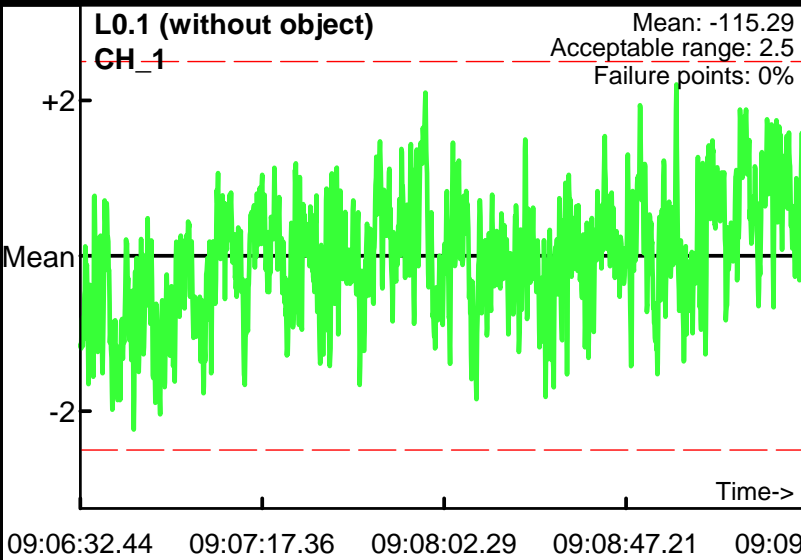Line Name: L0 L1 L2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
— — Acceptable limits

AM test
Operator: BG & BS
Date: 7/28/2009

L0 (without object)
CH_3

Mean: -0.52
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_4

Mean: -4.06
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_3

Mean: 89.85
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_4

Mean: 41.36
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_3

Mean: -0.49
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_4

Mean: -4.11
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L0 L1 L2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & BS
Date: 7/28/2009
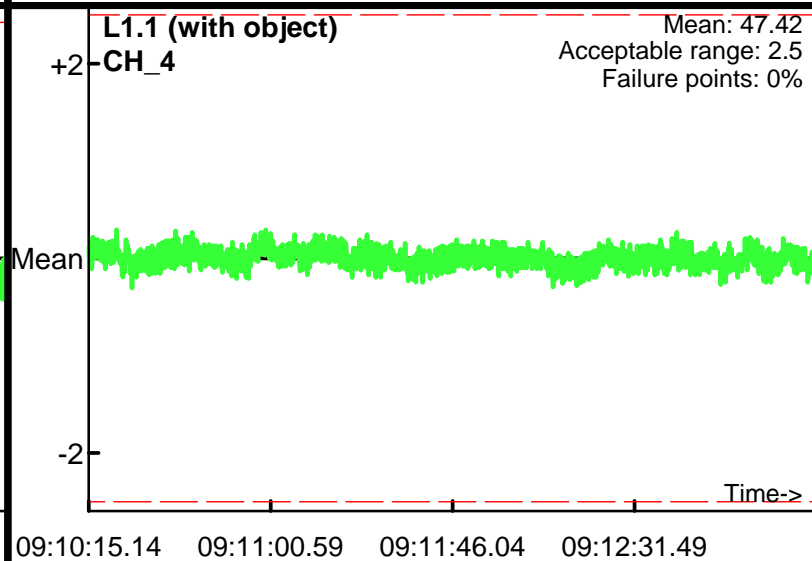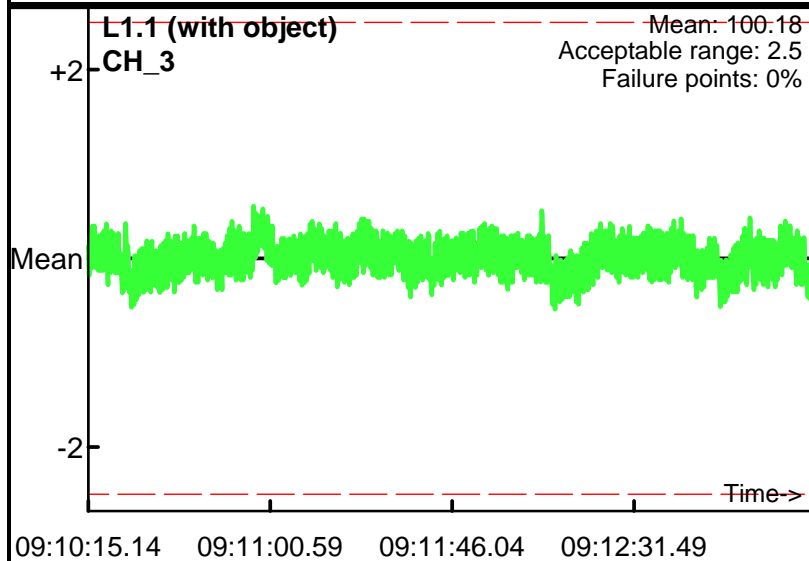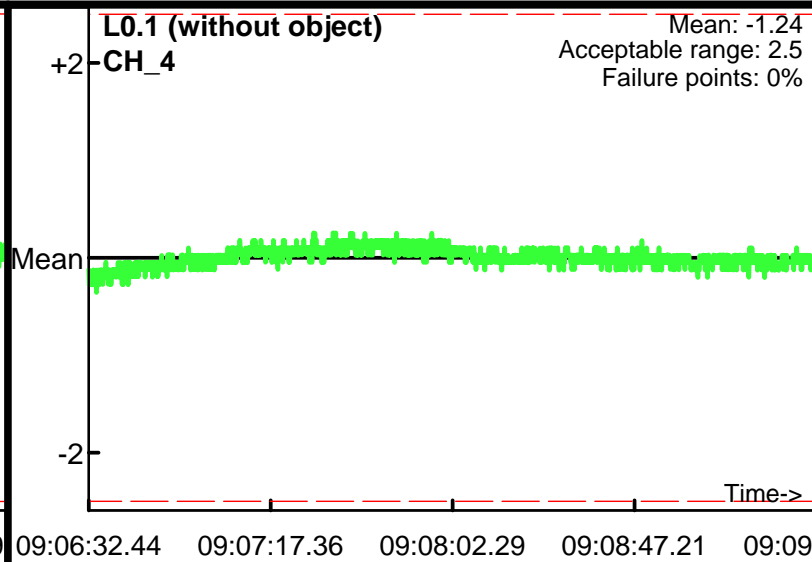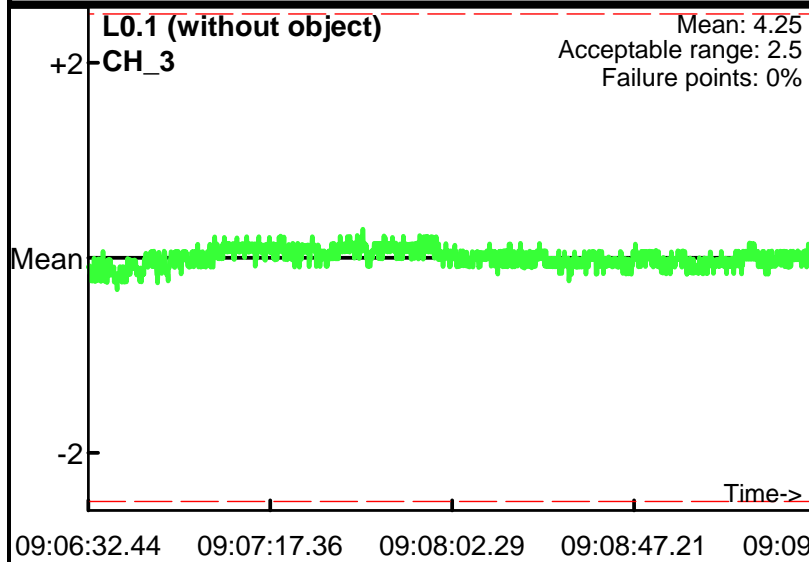

L0.1 (without object)
CH_1
Mean: -115.29
Acceptable range: 2.5
Failure points: 0%

L0.1 (without object)
CH_2
Mean: -9.22
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_1
Mean: 103.65
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_2
Mean: 148.1
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_1
Mean: -110.83
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_2
Mean: -7.9
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
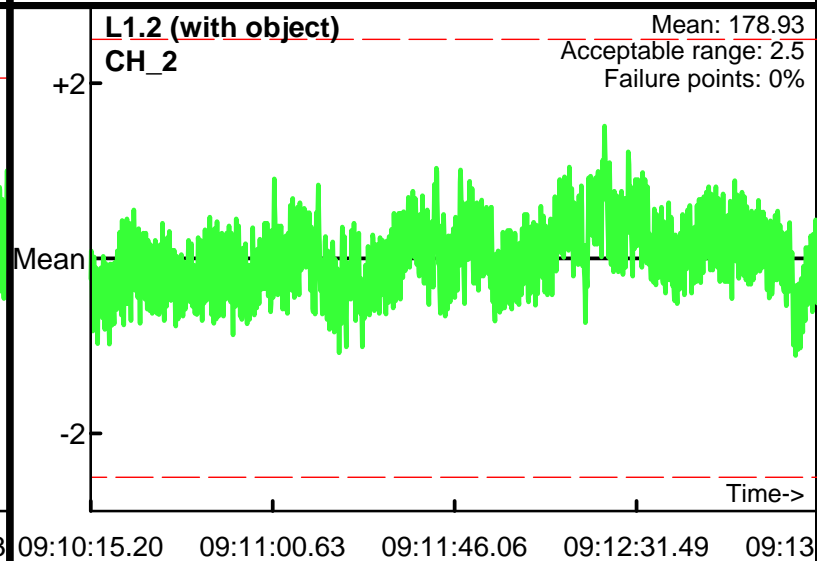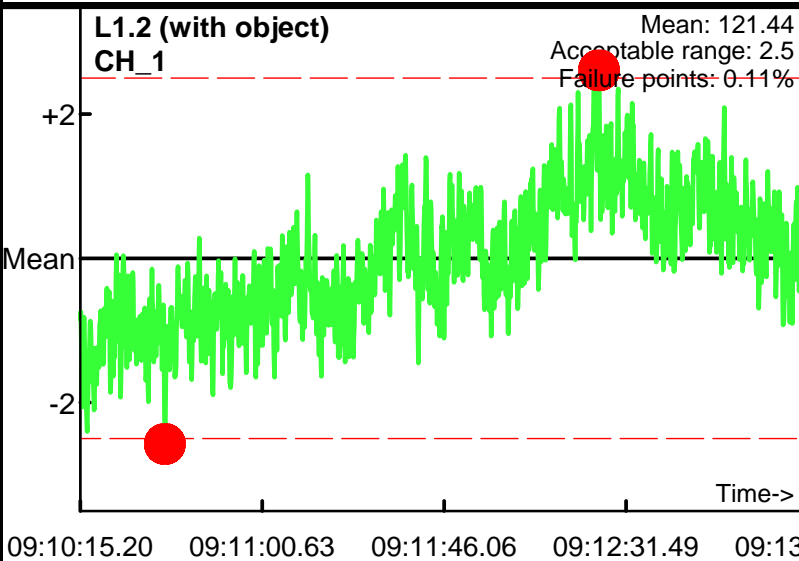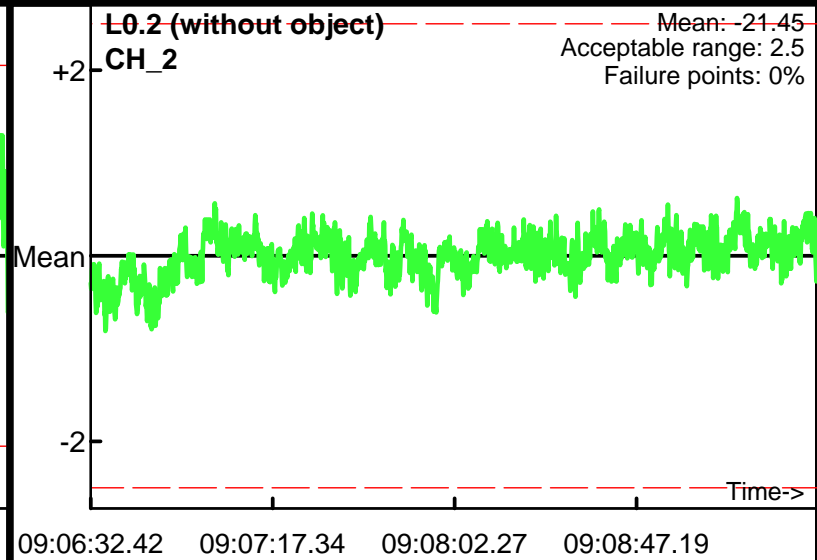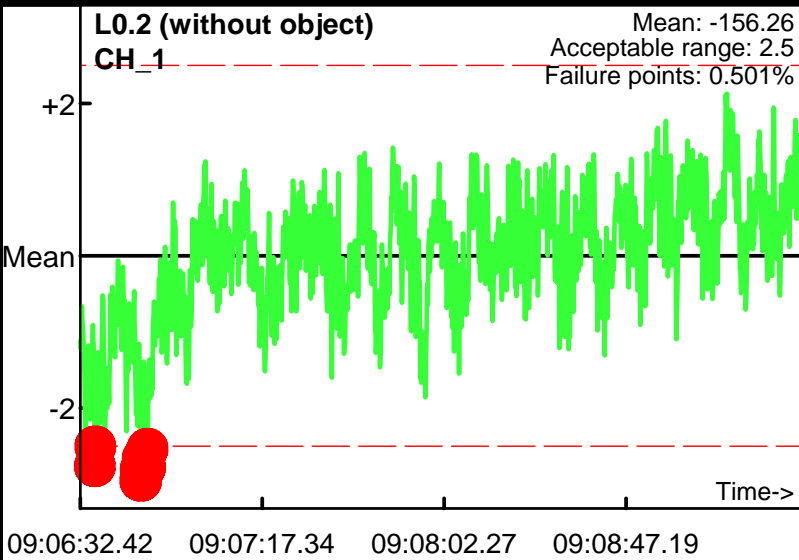Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & BS
Date: 7/28/2009

L0.1 (without object)
CH_3
+2
Mean
-2
Time->

Mean: 4.25
Acceptable range: 2.5
Failure points: 0%

09:06:32.44   09:07:17.36   09:08:02.29   09:08:47.21   09:09

L0.1 (without object)
CH_4
+2
Mean
-2
Time->

Mean: -1.24
Acceptable range: 2.5
Failure points: 0%

09:06:32.44   09:07:17.36   09:08:02.29   09:08:47.21   09:09

L1.1 (with object)
CH_3
+2
Mean
-2
Time->

Mean: 100.18
Acceptable range: 2.5
Failure points: 0%

09:10:15.14   09:11:00.59   09:11:46.04   09:12:31.49

L1.1 (with object)
CH_4
+2
Mean
-2
Time->

Mean: 47.42
Acceptable range: 2.5
Failure points: 0%

09:10:15.14   09:11:00.59   09:11:46.04   09:12:31.49

L2.1 (without object)
CH_3
+2
Mean
-2
Time->

Mean: 4.49
Acceptable range: 2.5
Failure points: 0%

09:13:52.94   09:14:07.41   09:14:21.89   09:14:36.37

L2.1 (without object)
CH_4
+2
Mean
-2
Time->

Mean: -1.28
Acceptable range: 2.5
Failure points: 0%

09:13:52.94   09:14:07.41   09:14:21.89   09:14:36.37

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

⬤ Outside range
– – – Acceptable limits

AM test
Operator: BG & BS
Date: 7/28/2009
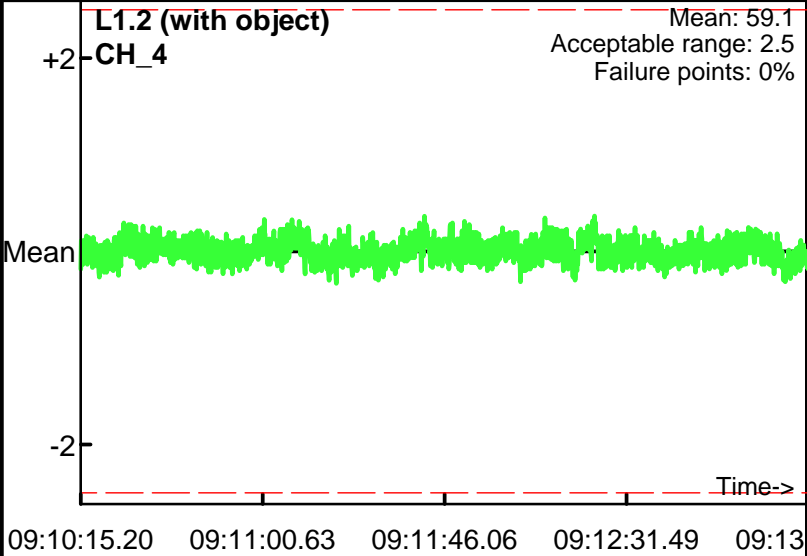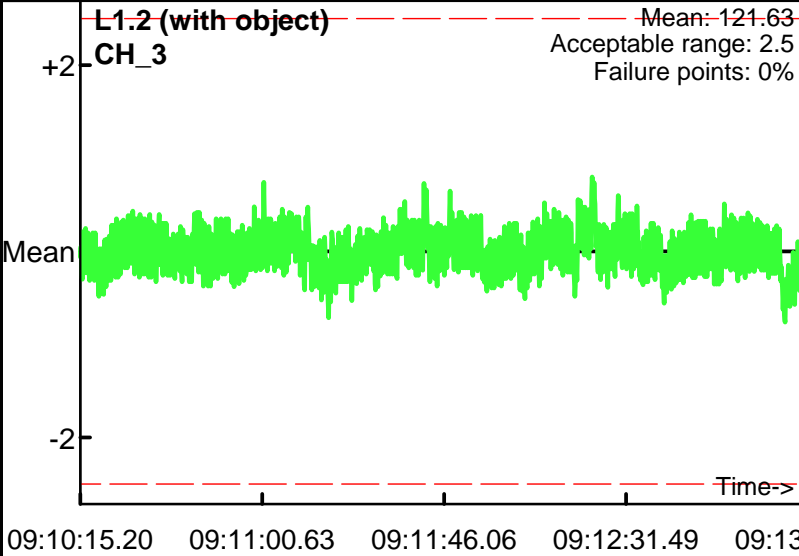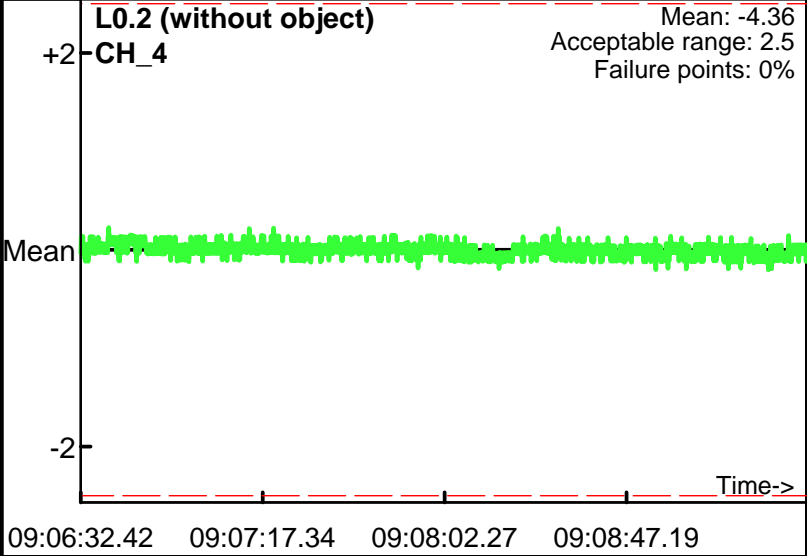

L0.2 (without object)
CH_1
Mean: -156.26
Acceptable range: 2.5
Failure points: 0.501%

L0.2 (without object)
CH_2
Mean: -21.45
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_1
Mean: 121.44
Acceptable range: 2.5
Failure points: 0.11%

L1.2 (with object)
CH_2
Mean: 178.93
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_1
Mean: -151.44
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_2
Mean: -20.14
Acceptable range: 2.5
Failure points: 0%

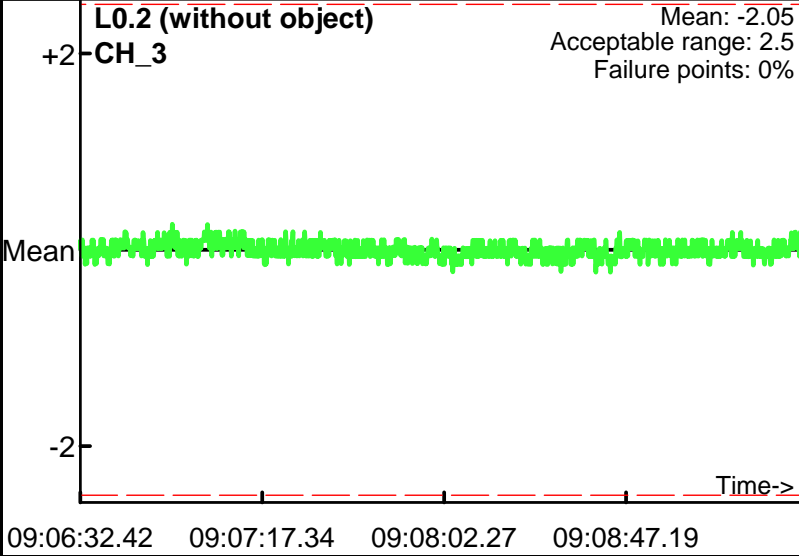Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & BS
Date: 7/28/2009

L0.2 (without object)
CH_3
Mean: -2.05
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:06:32.42   09:07:17.34   09:08:02.27   09:08:47.19

L0.2 (without object)
CH_4
Mean: -4.36
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:06:32.42   09:07:17.34   09:08:02.27   09:08:47.19

L1.2 (with object)
CH_3
Mean: 121.63
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:10:15.20   09:11:00.63   09:11:46.06   09:12:31.49   09:13

L1.2 (with object)
CH_4
Mean: 59.1
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:10:15.20   09:11:00.63   09:11:46.06   09:12:31.49   09:13

L2.2 (without object)
CH_3
Mean: -1.86
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:13:53.01   09:14:07.46   09:14:21.91   09:14:36.36

L2.2 (without object)
CH_4
Mean: -4.43
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
09:13:53.01   09:14:07.46   09:14:21.91   09:14:36.36

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits

PM test
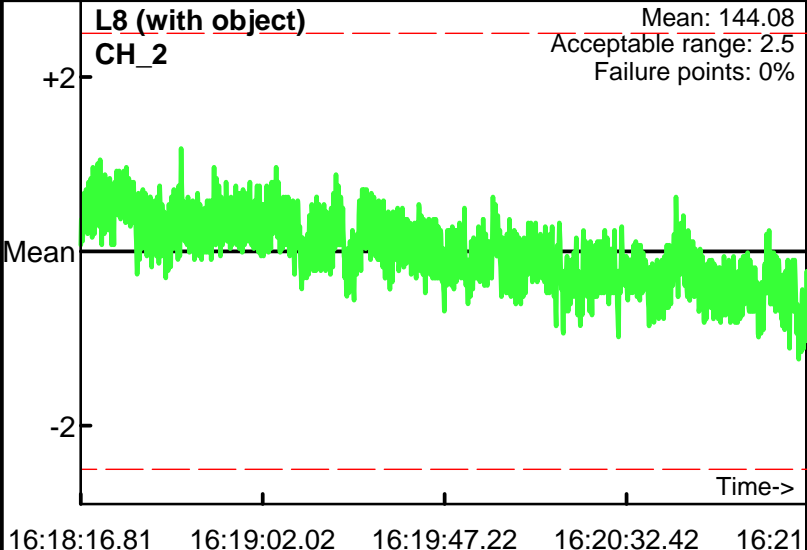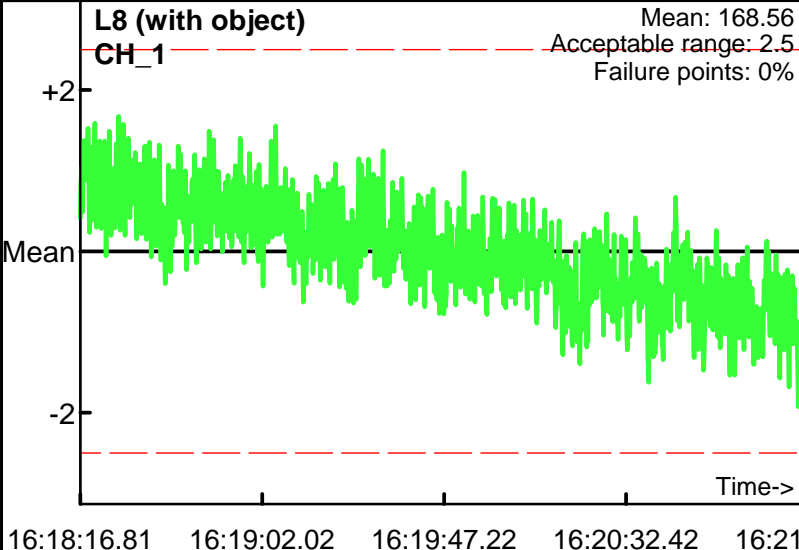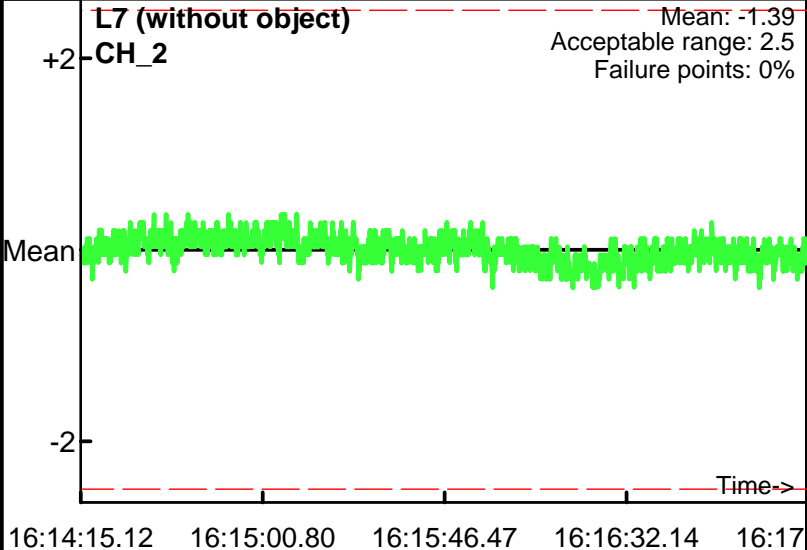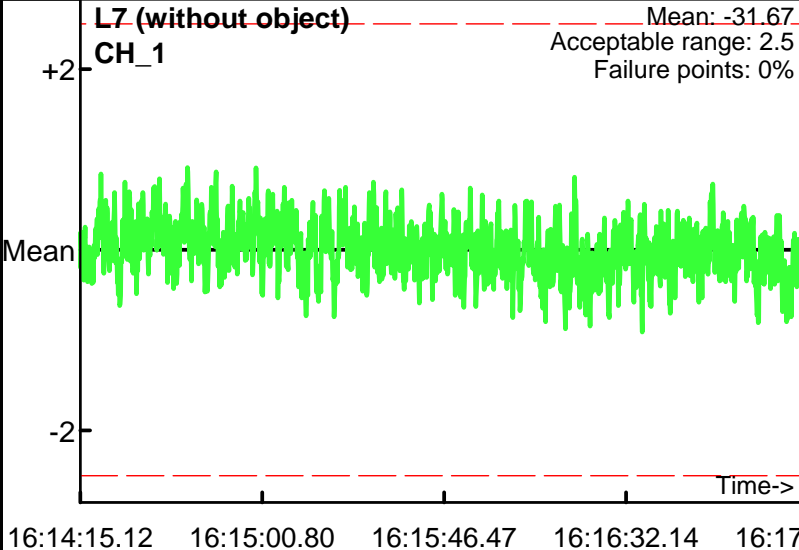Operator: BG & BS
Date: 7/28/2009

L7 (without object)
CH_1
Mean: -31.67
Acceptable range: 2.5
Failure points: 0%

L7 (without object)
CH_2
Mean: -1.39
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_1
Mean: 168.56
Acceptable range: 2.5
Failure points: 0%

L8 (with object)
CH_2
Mean: 144.08
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
CH_1
Mean: -32.11
Acceptable range: 2.5
Failure points: 0%

L9 (without object)
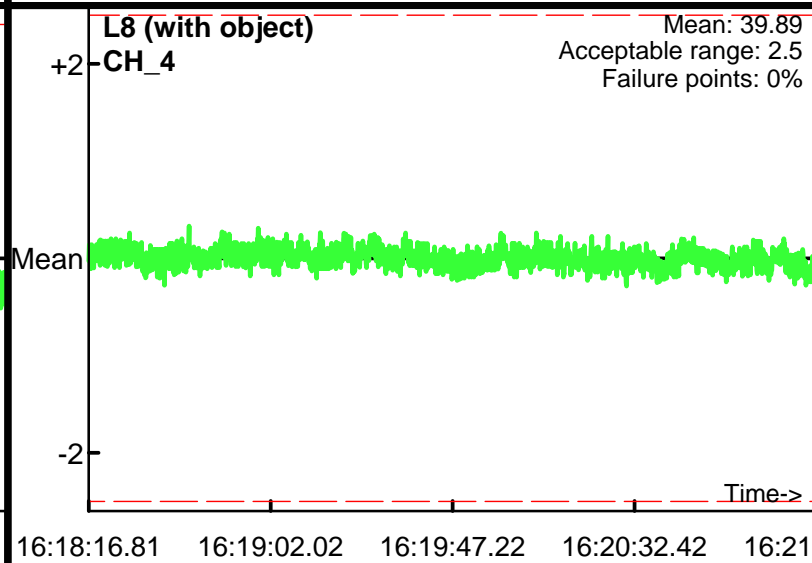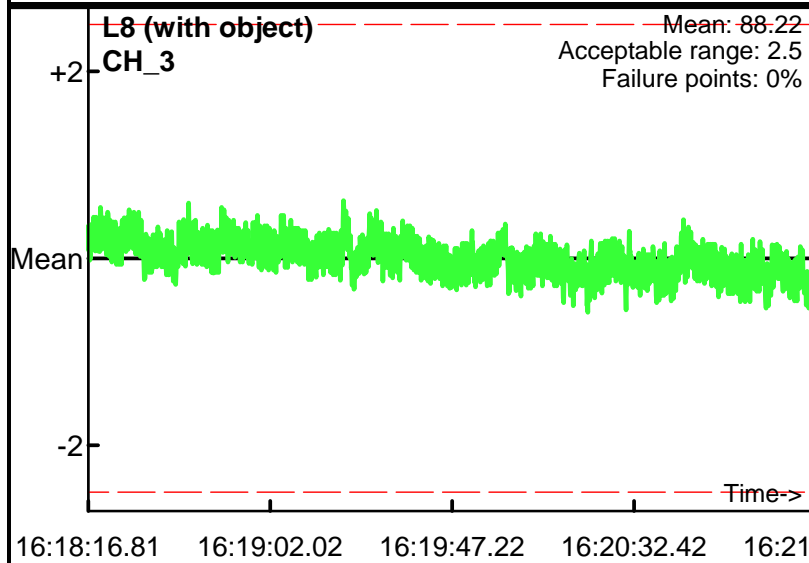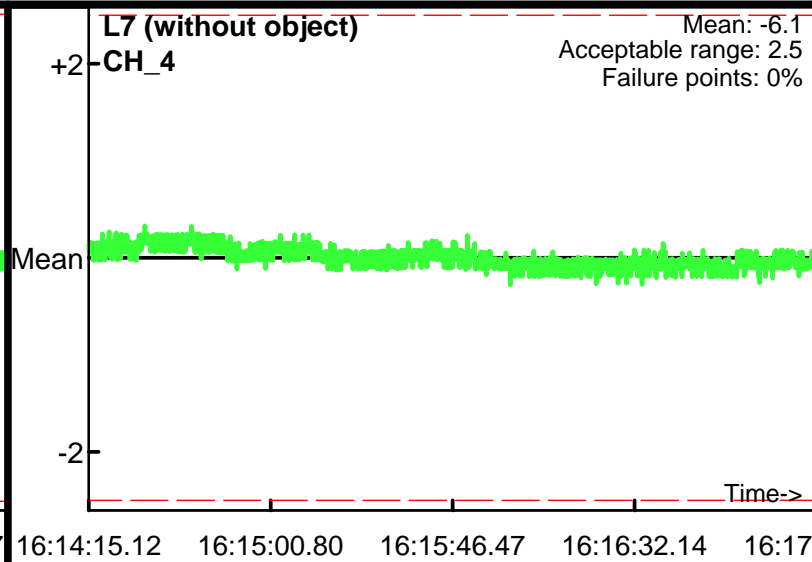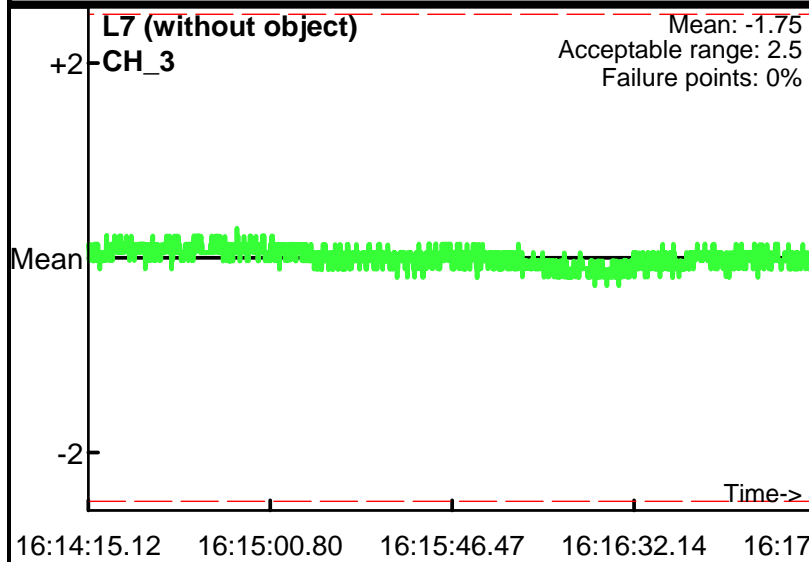CH_2
Mean: -1.44
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
Operator: BG & BS
Date: 7/28/2009

L7 (without object) CH_3
Mean: -1.75
Acceptable range: 2.5
Failure points: 0%

16:14:15.12 16:15:00.80 16:15:46.47 16:16:32.14 16:17

L7 (without object) CH_4
Mean: -6.1
Acceptable range: 2.5
Failure points: 0%

16:14:15.12 16:15:00.80 16:15:46.47 16:16:32.14 16:17

L8 (with object) CH_3
Mean: 88.22
Acceptable range: 2.5
Failure points: 0%

16:18:16.81 16:19:02.02 16:19:47.22 16:20:32.42 16:21

L8 (with object) CH_4
Mean: 39.89
Acceptable range: 2.5
Failure points: 0%

16:18:16.81 16:19:02.02 16:19:47.22 16:20:32.42 16:21

L9 (without object) CH_3
Mean: -1.67
Acceptable range: 2.5
Failure points: 0%

16:22:01.62 16:22:16.60 16:22:31.57 16:22:46.54

L9 (without object) CH_4
Mean: -6.14
Acceptable range: 2.5
Failure points: 0%

16:22:01.62 16:22:16.60 16:22:31.57 16:22:46.54

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L7 L8 L9

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
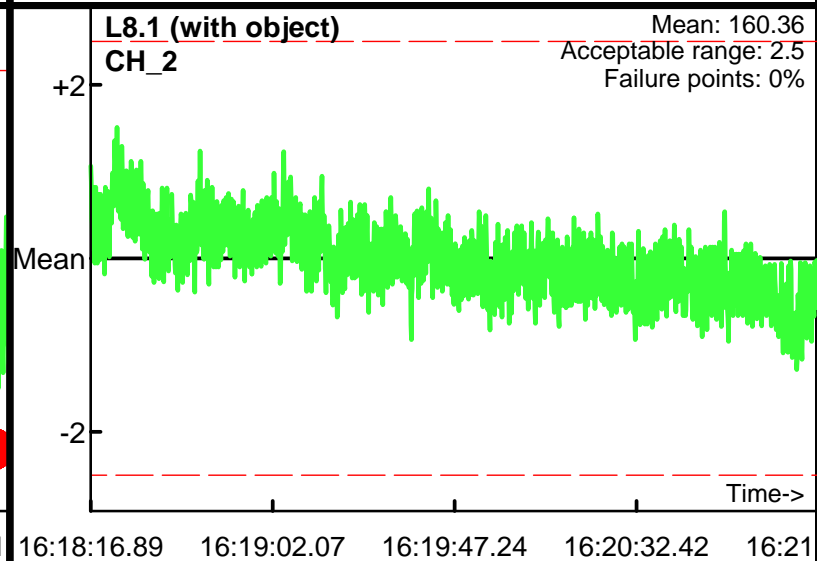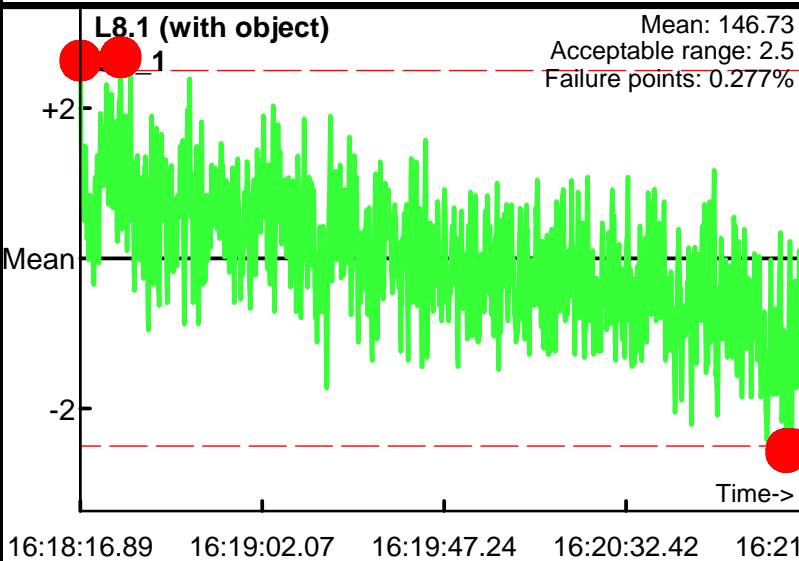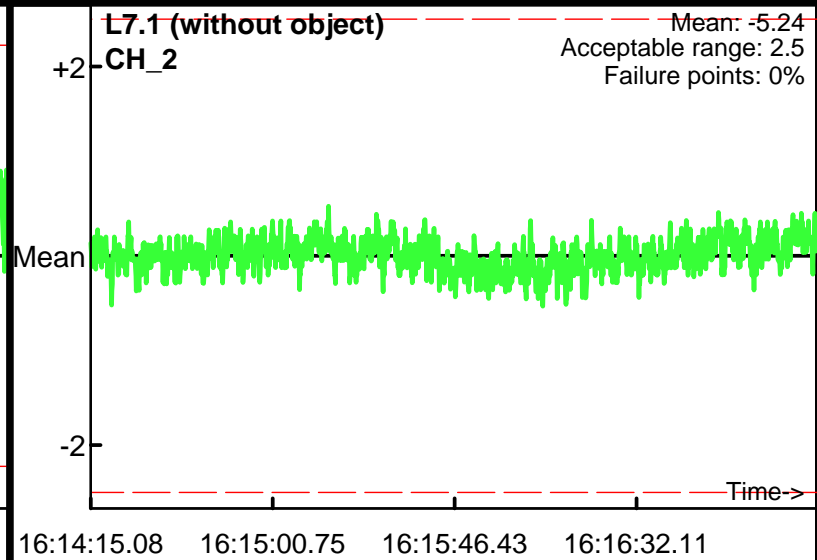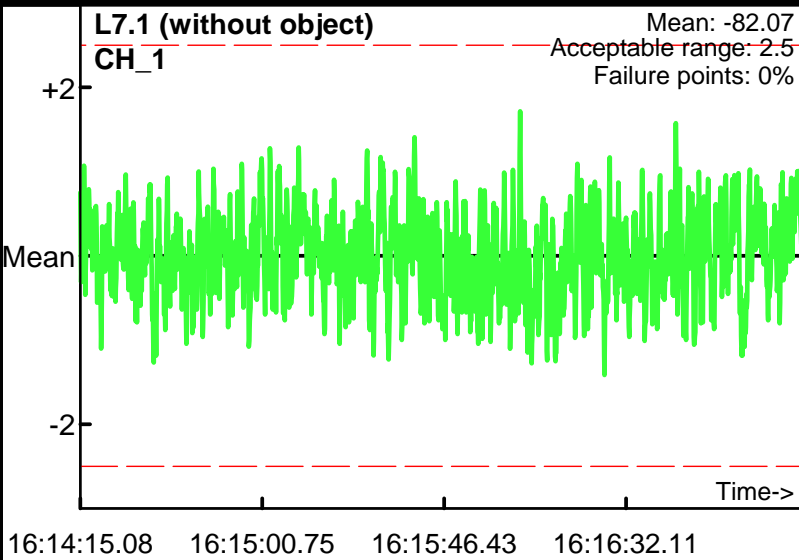Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/28/2009

L7.1 (without object) CH_1
Mean: -82.07
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object) CH_2
Mean: -5.24
Acceptable range: 2.5
Failure points: 0%

L8.1 (with object) CH_1
Mean: 146.73
Acceptable range: 2.5
Failure points: 0.277%

L8.1 (with object) CH_2
Mean: 160.36
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object) CH_1
Mean: -82.58
Acceptable range: 2.5
Failure points: 0%

L9.1 (without object) CH_2
Mean: -5.14
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
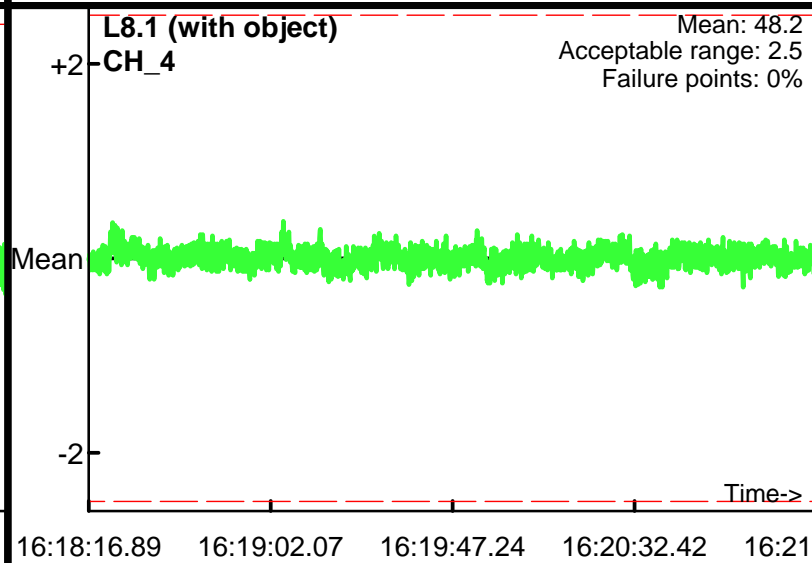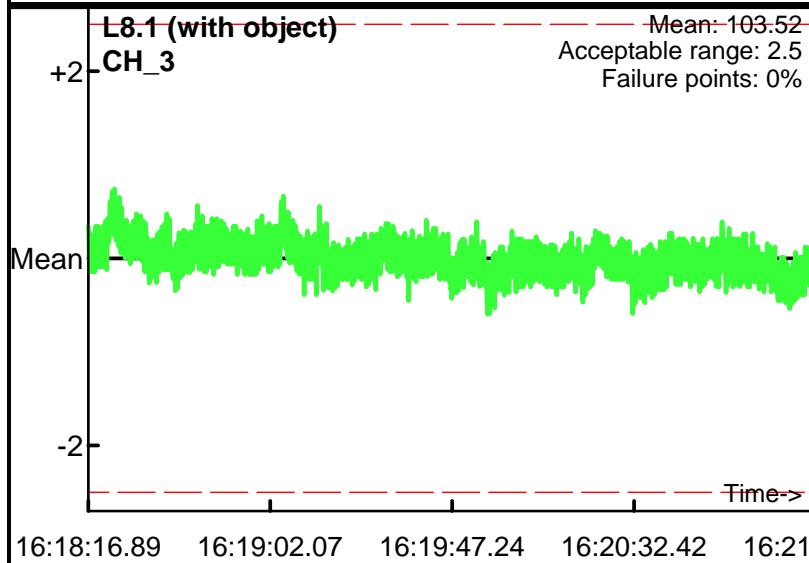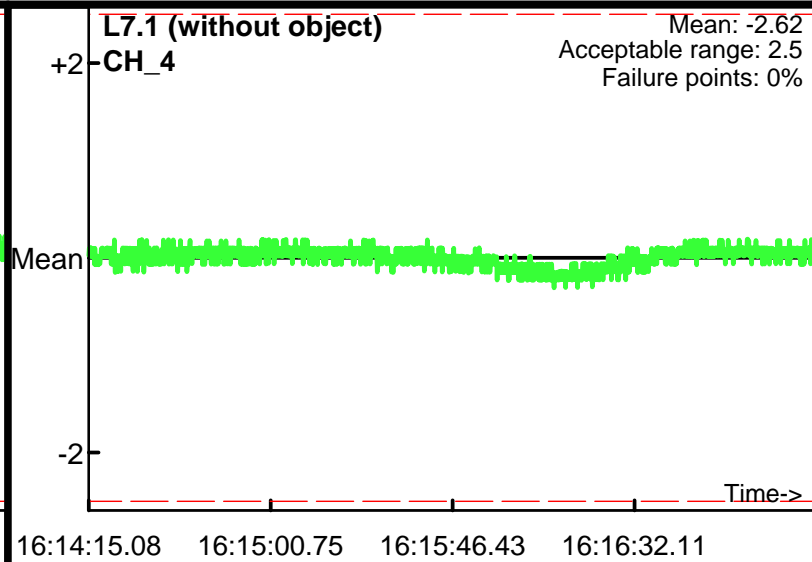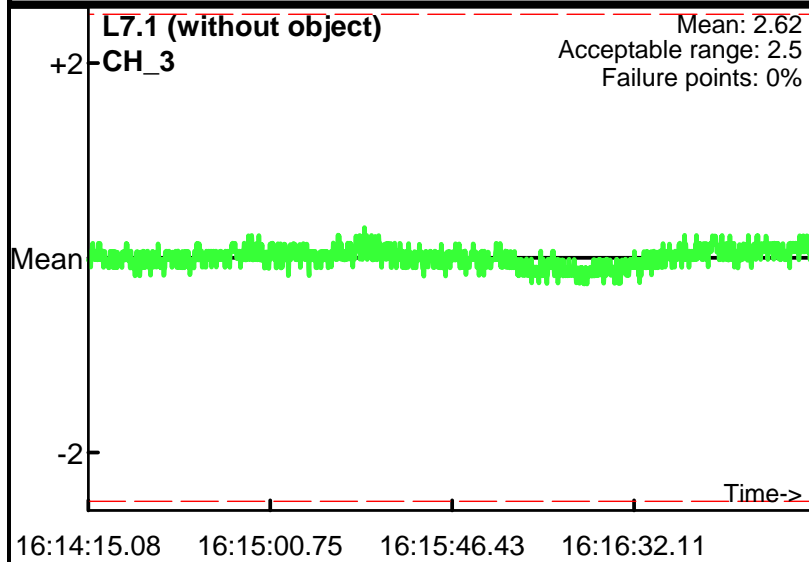Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/28/2009

L7.1 (without object)
CH_3
+2
Mean
-2
Time->

Mean: 2.62
Acceptable range: 2.5
Failure points: 0%

16:14:15.08   16:15:00.75   16:15:46.43   16:16:32.11

L7.1 (without object)
CH_4
+2
Mean
-2
Time->

Mean: -2.62
Acceptable range: 2.5
Failure points: 0%

16:14:15.08   16:15:00.75   16:15:46.43   16:16:32.11

L8.1 (with object)
CH_3
+2
Mean
-2
Time->

Mean: 103.52
Acceptable range: 2.5
Failure points: 0%

16:18:16.89   16:19:02.07   16:19:47.24   16:20:32.42   16:21

L8.1 (with object)
CH_4
+2
Mean
-2
Time->

Mean: 48.2
Acceptable range: 2.5
Failure points: 0%

16:18:16.89   16:19:02.07   16:19:47.24   16:20:32.42   16:21

L9.1 (without object)
CH_3
+2
Mean
-2
Time->

Mean: 2.81
Acceptable range: 2.5
Failure points: 0%

16:22:01.69   16:22:16.64   16:22:31.59   16:22:46.55   16:23

L9.1 (without object)
CH_4
+2
Mean
-2
Time->

Mean: -2.52
Acceptable range: 2.5
Failure points: 0%

16:22:01.69   16:22:16.64   16:22:31.59   16:22:46.55   16:23

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L7.1 L8.1 L9.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/28/2009
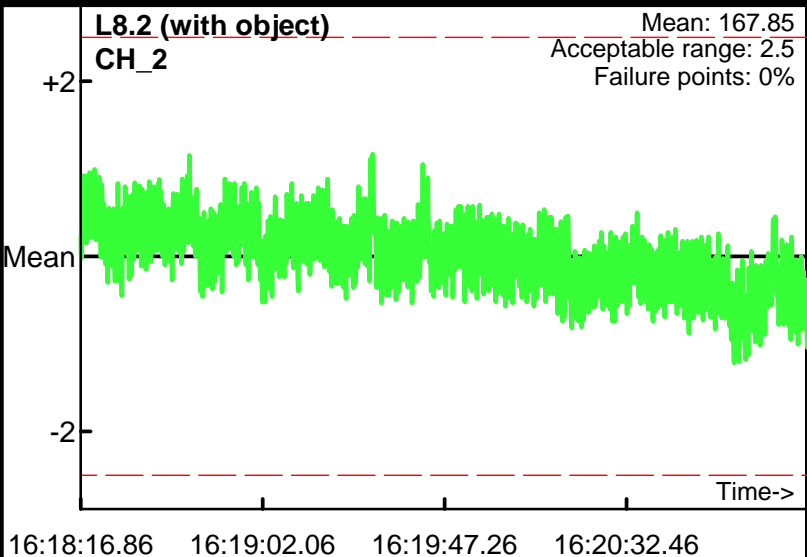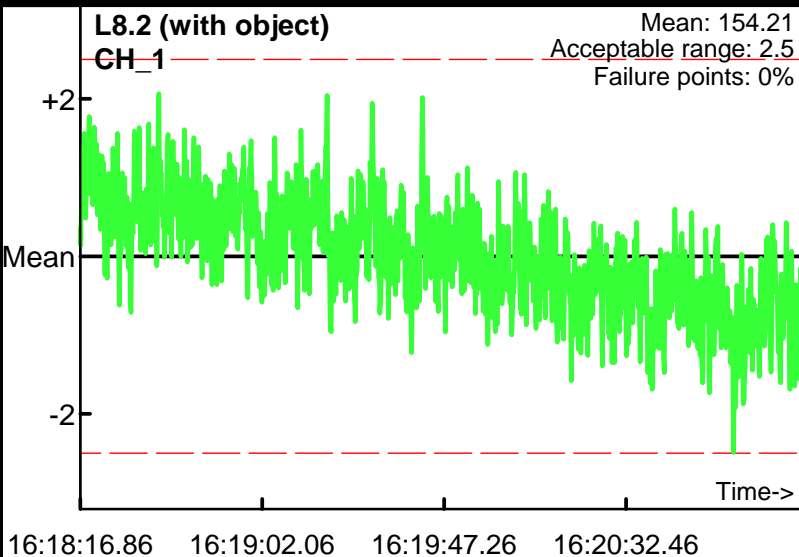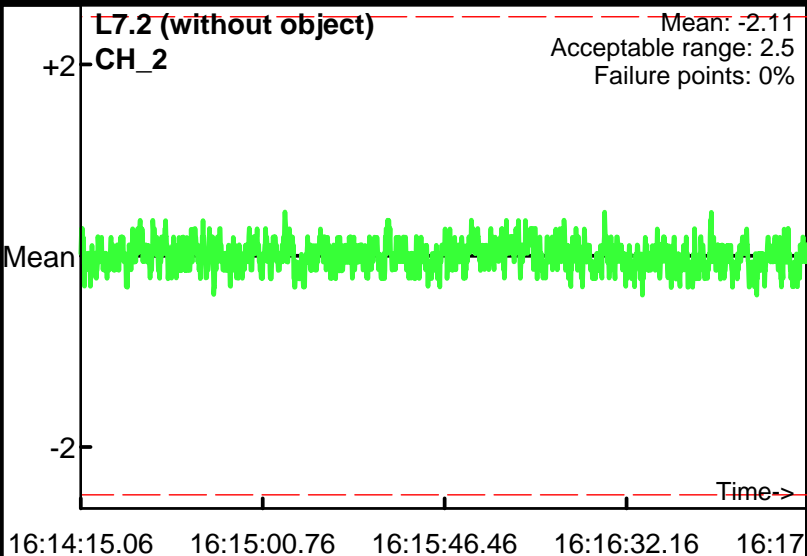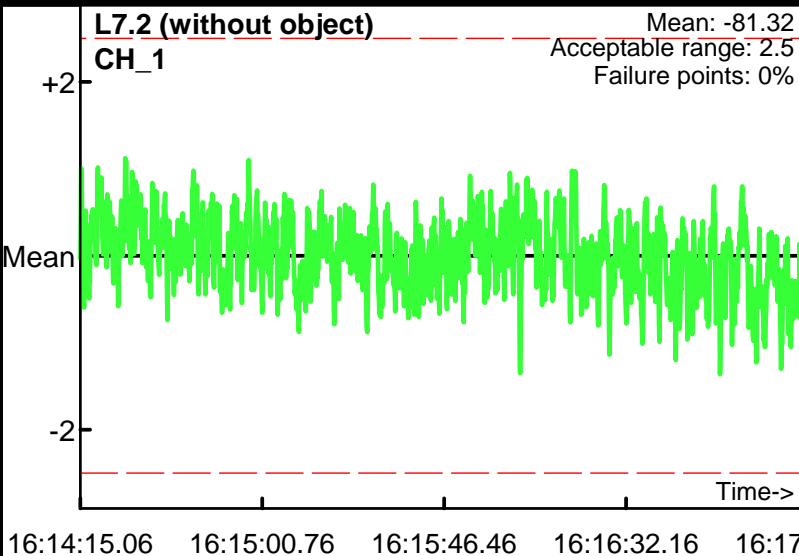
L7.2 (without object)
CH_1

Mean: -81.32
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

16:14:15.06   16:15:00.76   16:15:46.46   16:16:32.16   16:17

L7.2 (without object)
CH_2

Mean: -2.11
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:14:15.06   16:15:00.76   16:15:46.46   16:16:32.16   16:17

L8.2 (with object)
CH_1

Mean: 154.21
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:18:16.86   16:19:02.06   16:19:47.26   16:20:32.46

L8.2 (with object)
CH_2

Mean: 167.85
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:18:16.86   16:19:02.06   16:19:47.26   16:20:32.46

L9.2 (without object)
CH_1

Mean: -82.23
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:22:01.66   16:22:16.63   16:22:31.61   16:22:46.59

L9.2 (without object)
CH_2

Mean: -2.13
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

16:22:01.66   16:22:16.63   16:22:31.61   16:22:46.59

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/28/2009
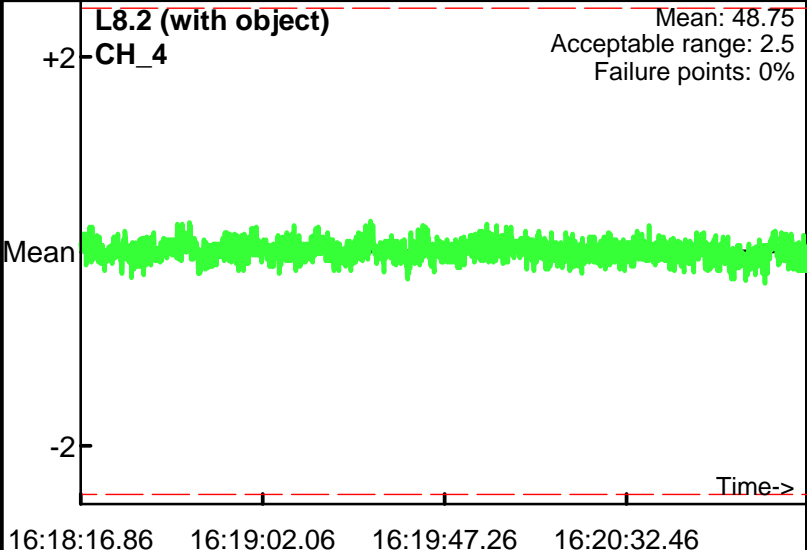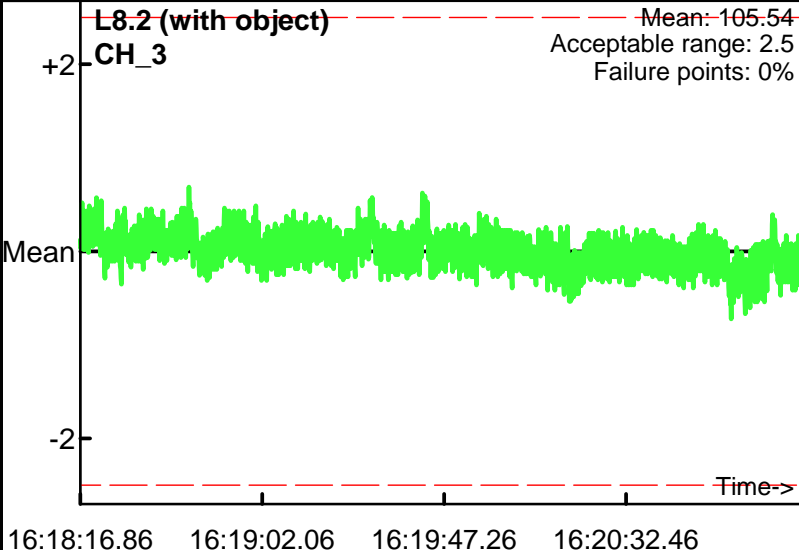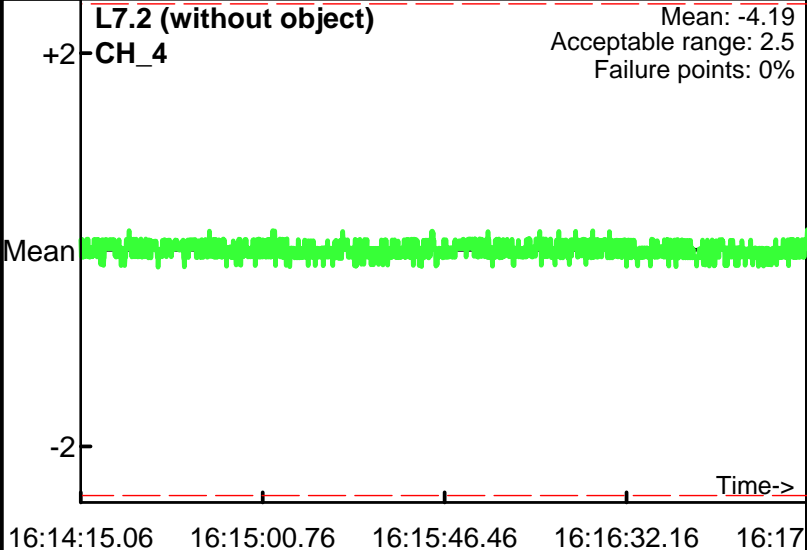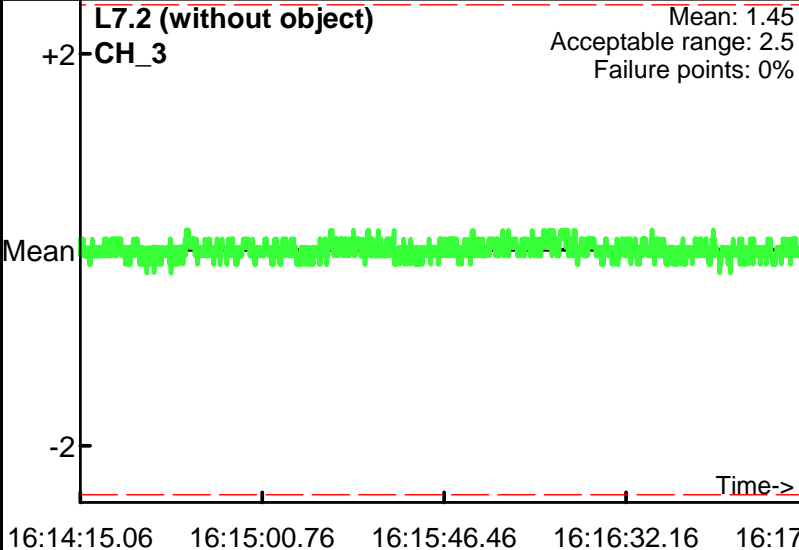
L7.2 (without object)
CH_3

Mean: 1.45
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:14:15.06   16:15:00.76   16:15:46.46   16:16:32.16   16:17

L7.2 (without object)
CH_4

Mean: -4.19
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:14:15.06   16:15:00.76   16:15:46.46   16:16:32.16   16:17

L8.2 (with object)
CH_3

Mean: 105.54
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:18:16.86   16:19:02.06   16:19:47.26   16:20:32.46

L8.2 (with object)
CH_4

Mean: 48.75
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:18:16.86   16:19:02.06   16:19:47.26   16:20:32.46

L9.2 (without object)
CH_3

Mean: 1.55
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:22:01.66   16:22:16.63   16:22:31.61   16:22:46.59

L9.2 (without object)
CH_4

Mean: -4.14
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:22:01.66   16:22:16.63   16:22:31.61   16:22:46.59

Database: C:_QCReports_Ord_Data\072809\QC\072809_TA_QC.gdb
Line Name: L7.2 L8.2 L9.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – Acceptable limits

AM test
Operator: BG & BS
Date: 7/29/2009

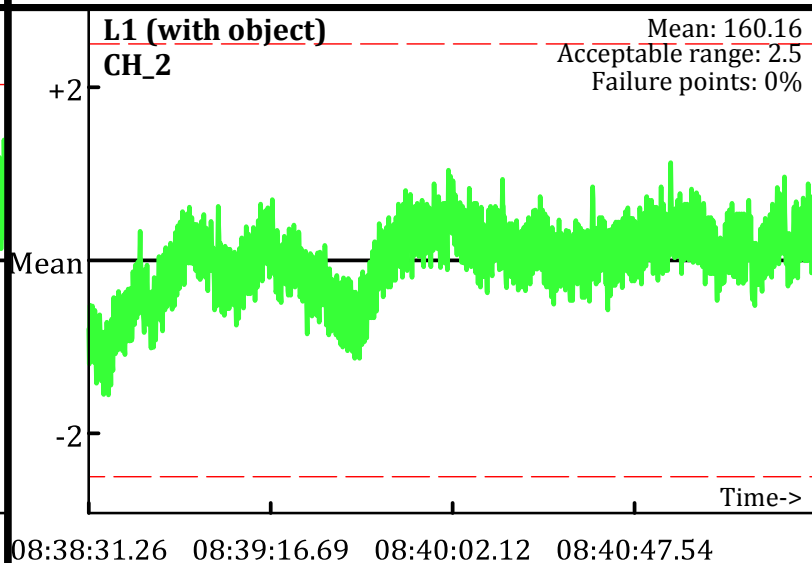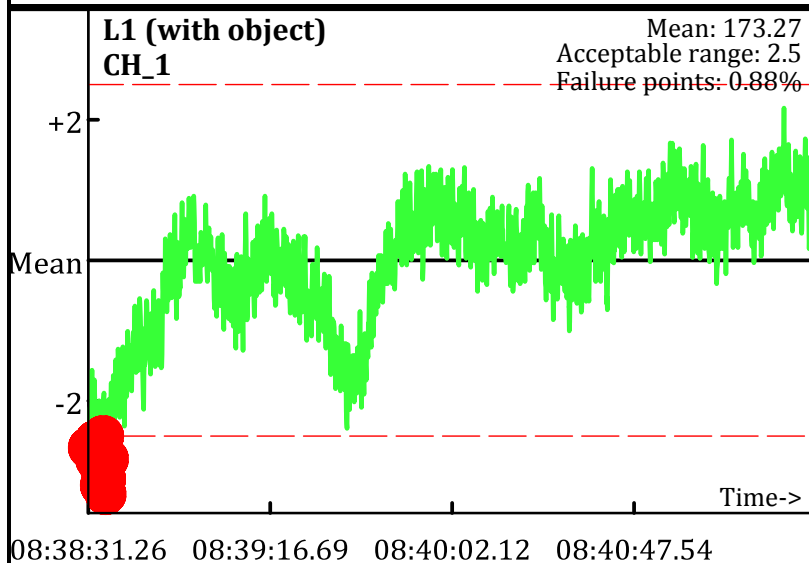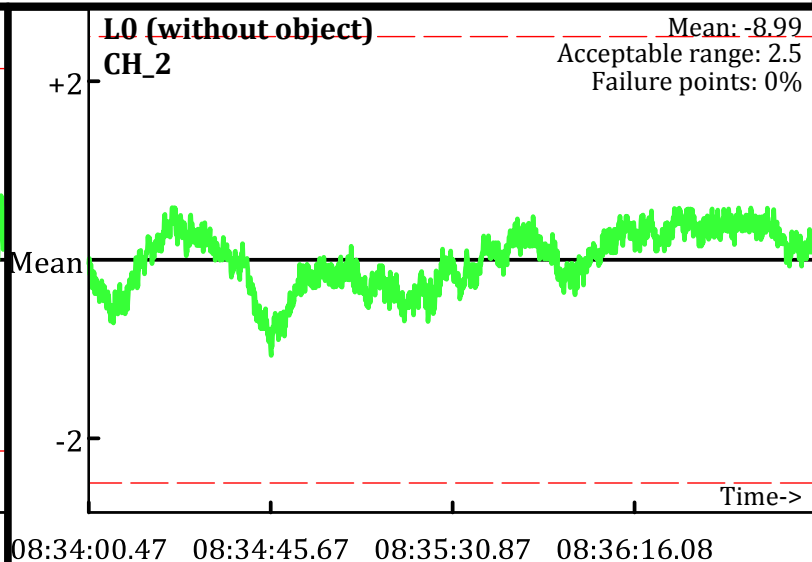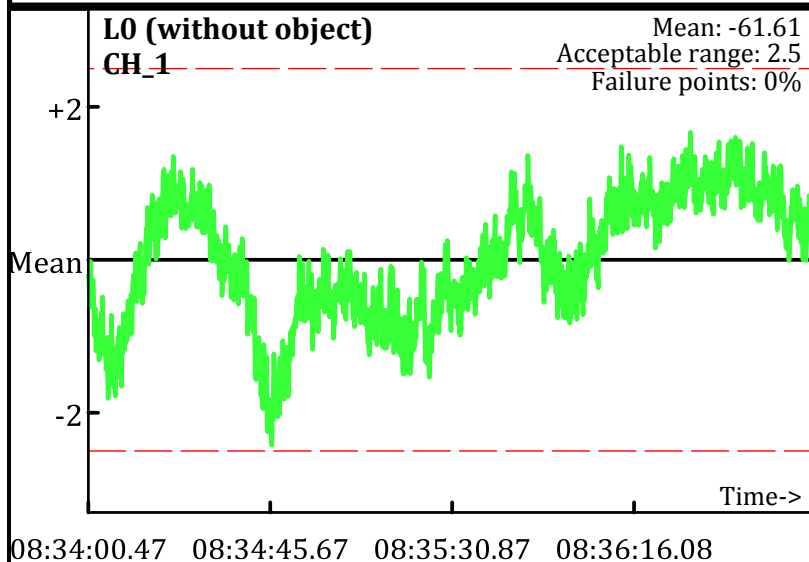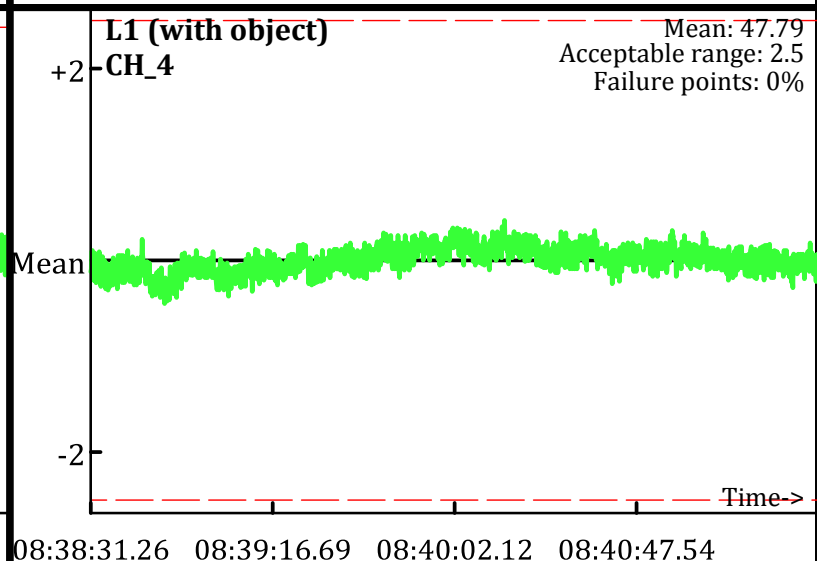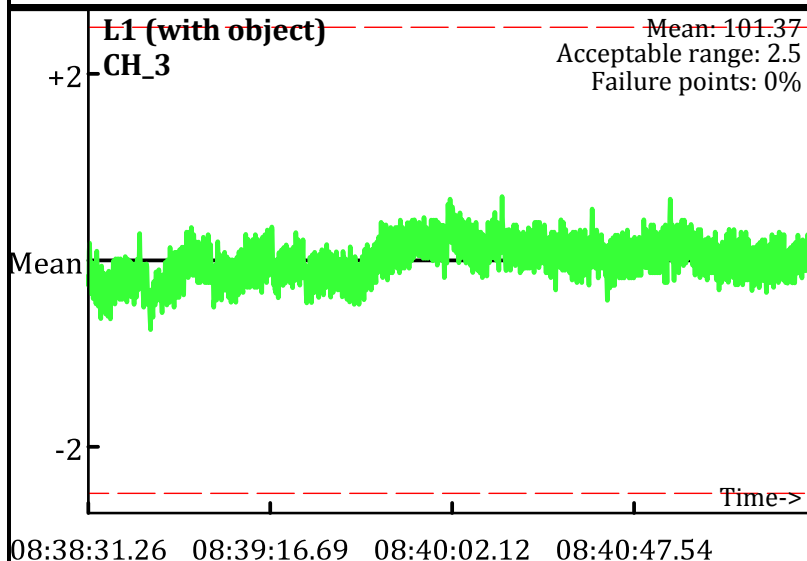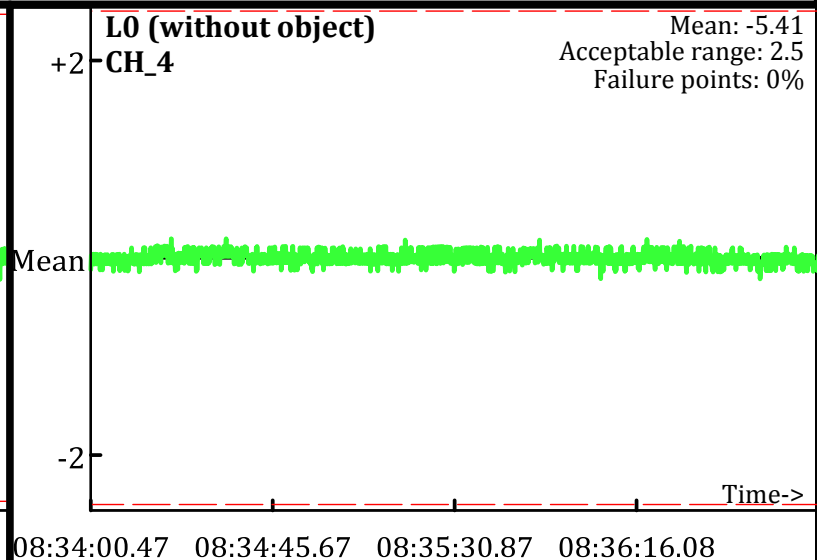L0 (without object) CH_1
Mean: -61.61
Acceptable range: 2.5
Failure points: 0%

L0 (without object) CH_2
Mean: -8.99
Acceptable range: 2.5
Failure points: 0%

08:34:00.47   08:34:45.67   08:35:30.87   08:36:16.08

L1 (with object) CH_1
Mean: 173.27
Acceptable range: 2.5
Failure points: 0.88%

L1 (with object) CH_2
Mean: 160.16
Acceptable range: 2.5
Failure points: 0%

08:38:31.26   08:39:16.69   08:40:02.12   08:40:47.54

L2 (without object) CH_1
Mean: -58.59
Acceptable range: 2.5
Failure points: 0%

L2 (without object) CH_2
Mean: -8.01
Acceptable range: 2.5
Failure points: 0%

08:42:54.06   08:43:08.27   08:43:22.47   08:43:36.67

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L0 L1 L2

Page: 1

Static Calibration Test

● Outside range
--- Acceptable limits

L0 (without object)
CH_3
Mean: -2.67
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:34:00.47   08:34:45.67   08:35:30.87   08:36:16.08

L0 (without object)
CH_4
Mean: -5.41
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:34:00.47   08:34:45.67   08:35:30.87   08:36:16.08

L1 (with object)
CH_3
Mean: 101.37
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:38:31.26   08:39:16.69   08:40:02.12   08:40:47.54

L1 (with object)
CH_4
Mean: 47.79
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:38:31.26   08:39:16.69   08:40:02.12   08:40:47.54

L2 (without object)
CH_3
Mean: -2.45
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
08:42:54.06   08:43:08.27   08:43:22.47   08:43:36.67

L2 (without object)
CH_4
Mean: -5.36
Acceptable range: 2.5
Failure points: 0%
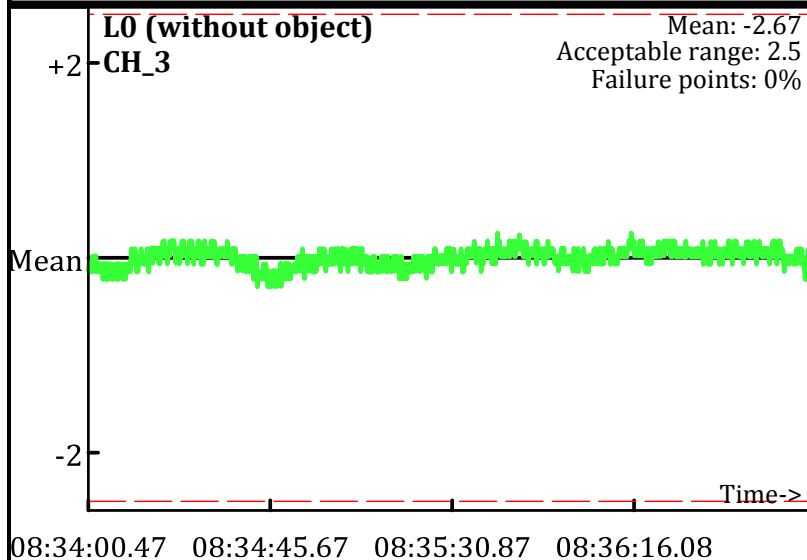
+2
Mean
-2
Time->
08:42:54.06   08:43:08.27   08:43:22.47   08:43:36.67

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
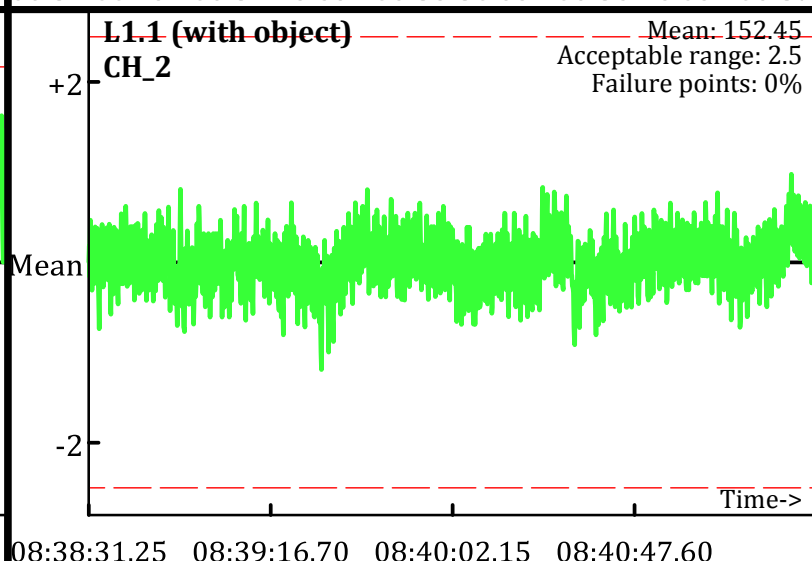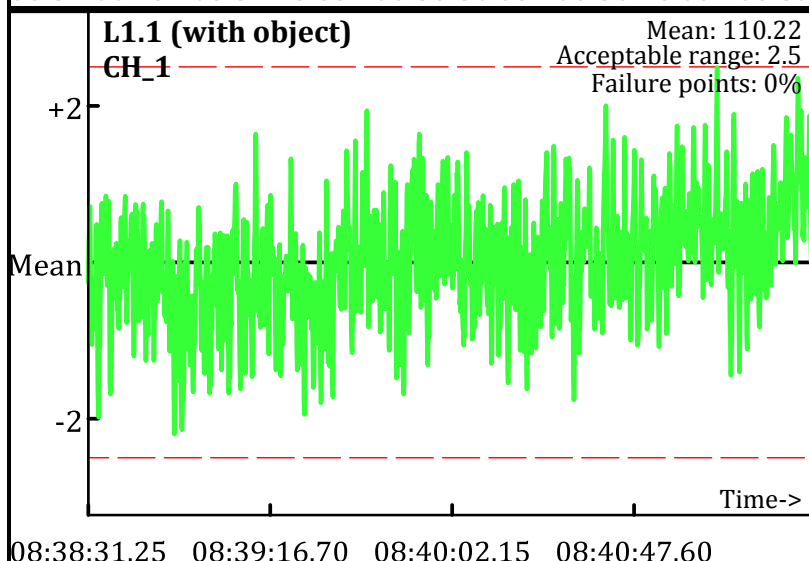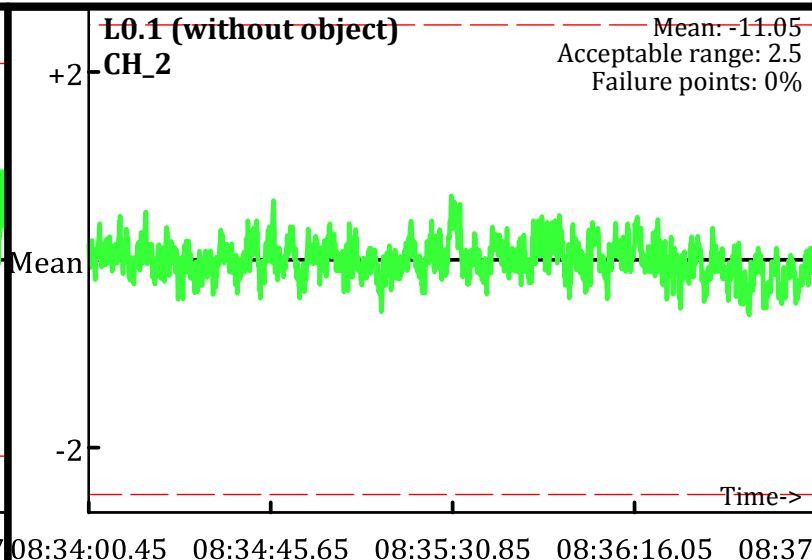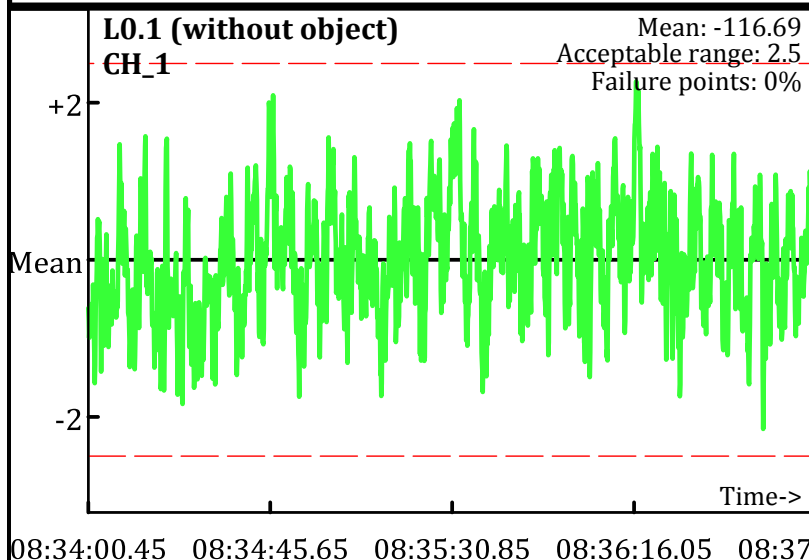Grid/Location: QC Area

● Outside range
- - - Acceptable limits

AM test
Operator: BG & BS
Date: 7/29/2009

L0.1 (without object) CH_1 — Mean: -116.69, Acceptable range: 2.5, Failure points: 0%

L0.1 (without object) CH_2 — Mean: -11.05, Acceptable range: 2.5, Failure points: 0%

L1.1 (with object) CH_1 — Mean: 110.22, Acceptable range: 2.5, Failure points: 0%

L1.1 (with object) CH_2 — Mean: 152.45, Acceptable range: 2.5, Failure points: 0%

L2.1 (without object) CH_1 — Mean: -114.95, Acceptable range: 2.5, Failure points: 0%

L2.1 (without object) CH_2 — Mean: -10.77, Acceptable range: 2.5, Failure points: 0%

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
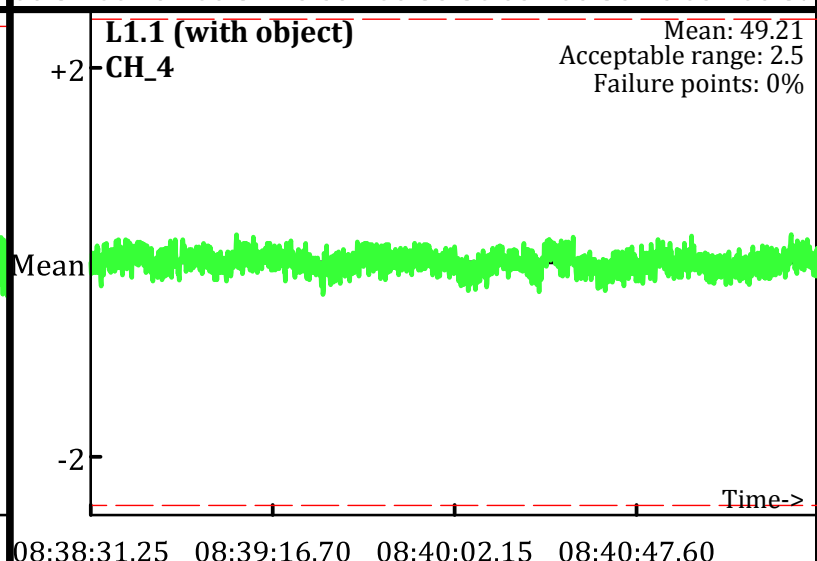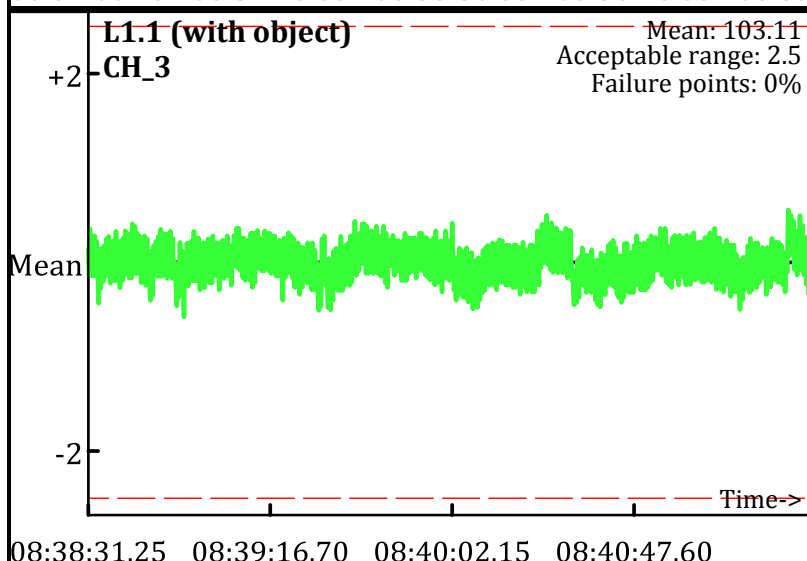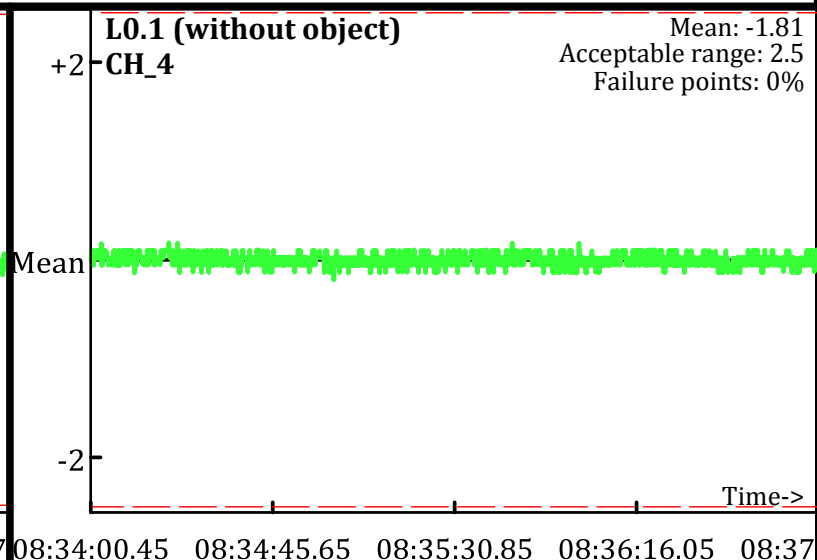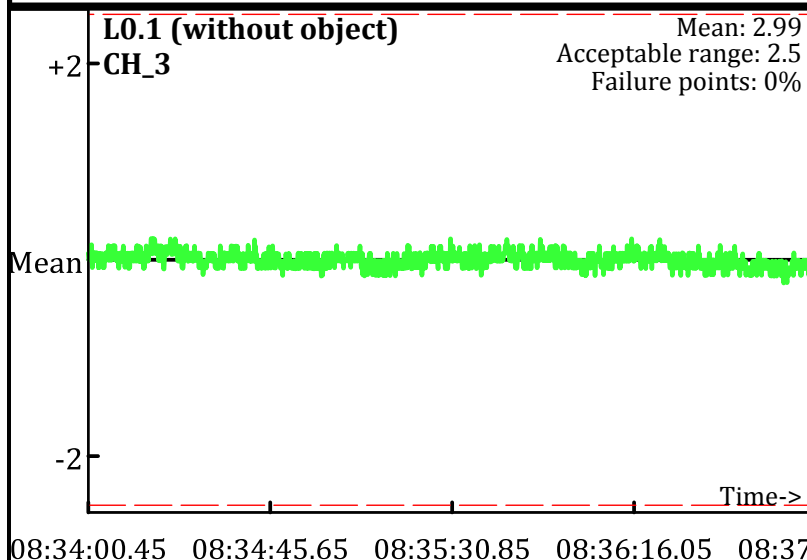Grid/Location: QC Area

🔴 Outside range
— — Acceptable limits

AM test
Operator: BG & BS
Date: 7/29/2009

L0.1 (without object)
CH_3
Mean: 2.99
Acceptable range: 2.5
Failure points: 0%

L0.1 (without object)
CH_4
Mean: -1.81
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_3
Mean: 103.11
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_4
Mean: 49.21
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_3
Mean: 2.99
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_4
Mean: -1.83
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
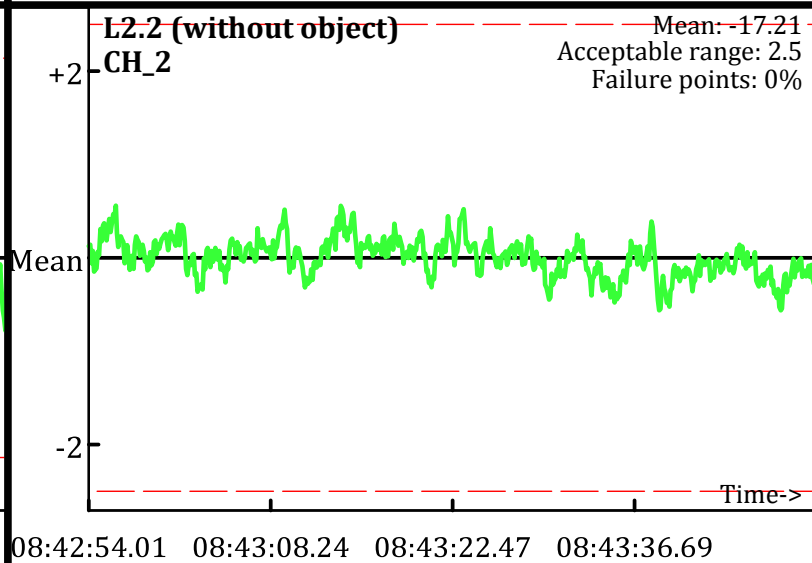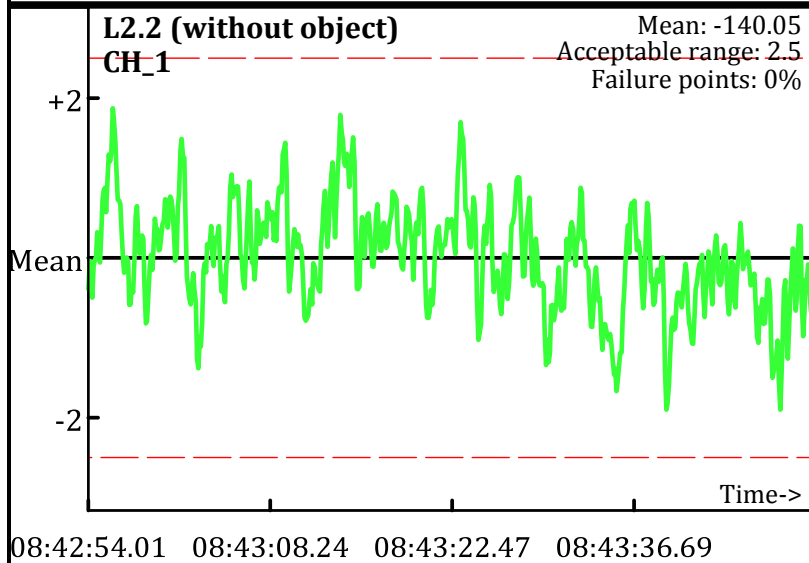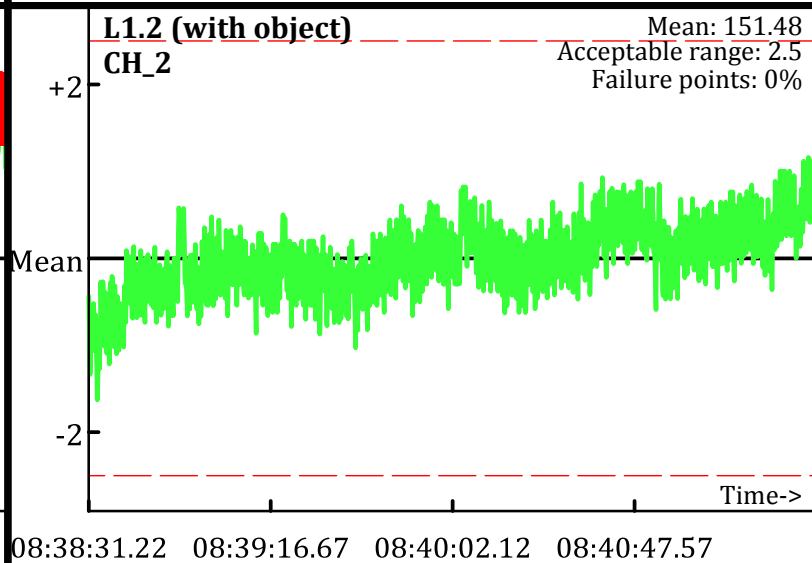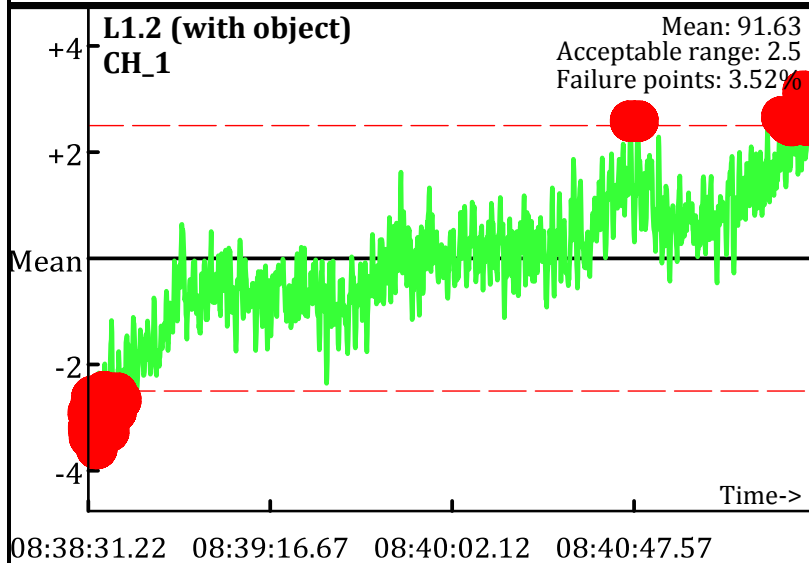-- Acceptable limits

AM test
Operator: BG & BS
Date: 7/29/2009

L0.2 (without object) CH_1 — Mean: -147.13, Acceptable range: 2.5, Failure points: 2.05%

L0.2 (without object) CH_2 — Mean: -19.34, Acceptable range: 2.5, Failure points: 0%

L1.2 (with object) CH_1 — Mean: 91.63, Acceptable range: 2.5, Failure points: 3.52%

L1.2 (with object) CH_2 — Mean: 151.48, Acceptable range: 2.5, Failure points: 0%

L2.2 (without object) CH_1 — Mean: -140.05, Acceptable range: 2.5, Failure points: 0%

L2.2 (without object) CH_2 — Mean: -17.21, Acceptable range: 2.5, Failure points: 0%

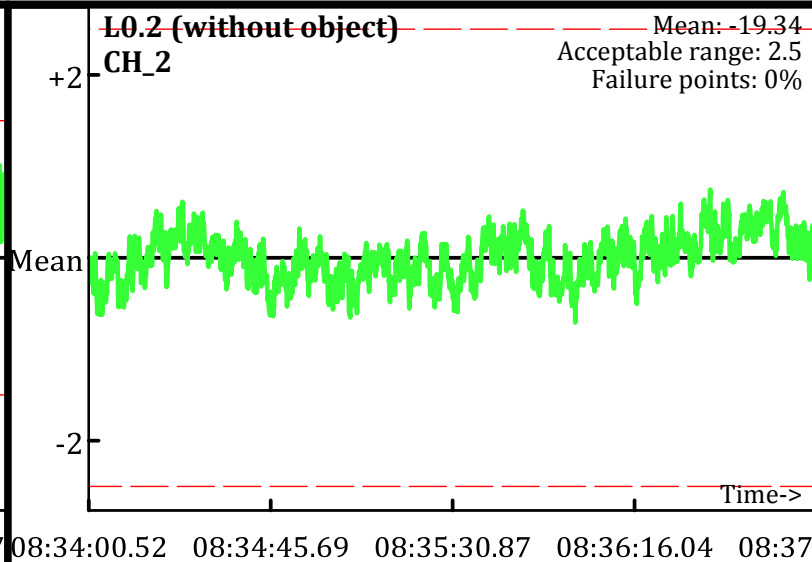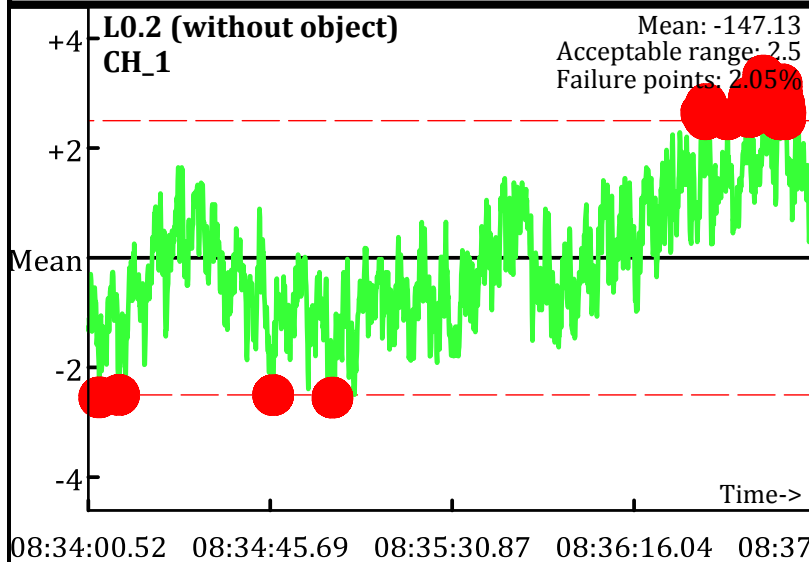Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: BG & BS
Date: 7/29/2009

L0.2 (without object)
CH_3
Mean: -1.38
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_4
Mean: -4.1
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_3
Mean: 103.39
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_4
Mean: 49.53
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_3
Mean: -0.97
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
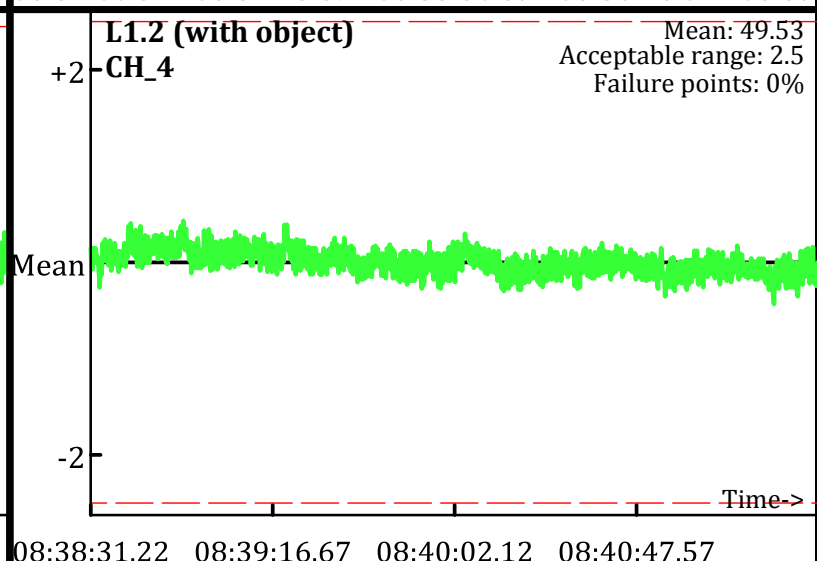**CH_4**
Mean: -4.04
Acceptable range: 2.5
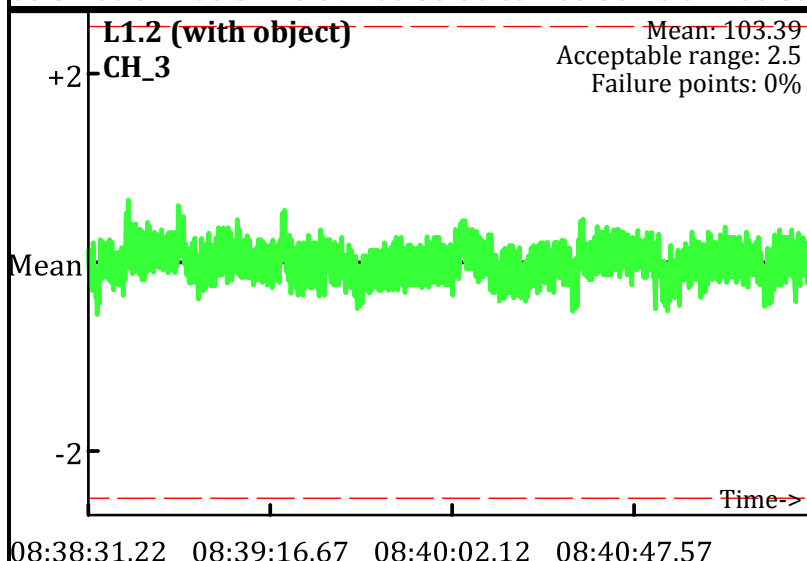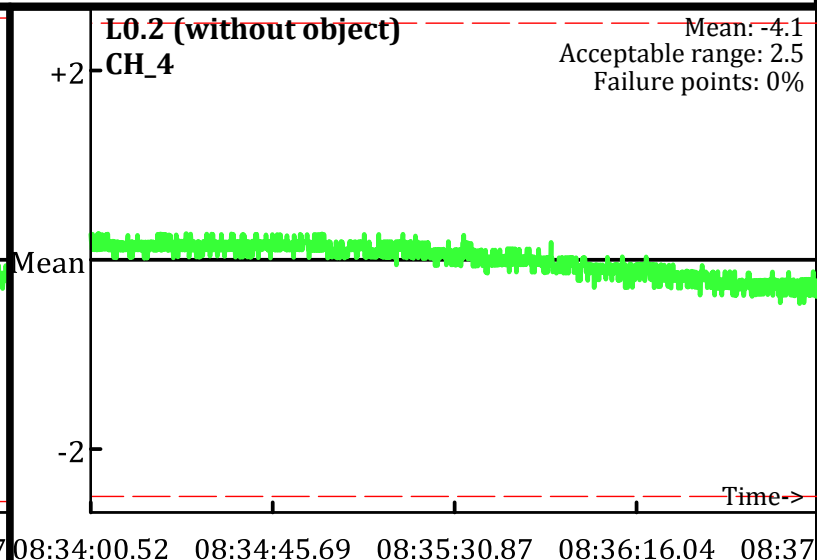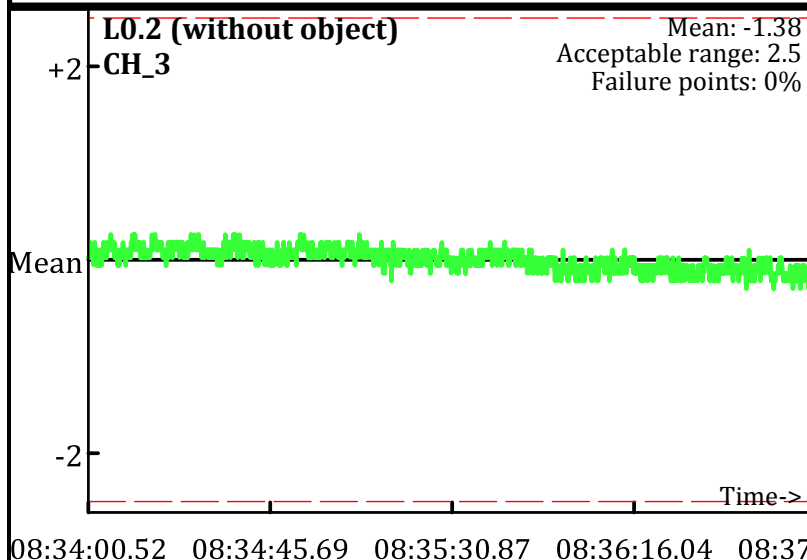Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

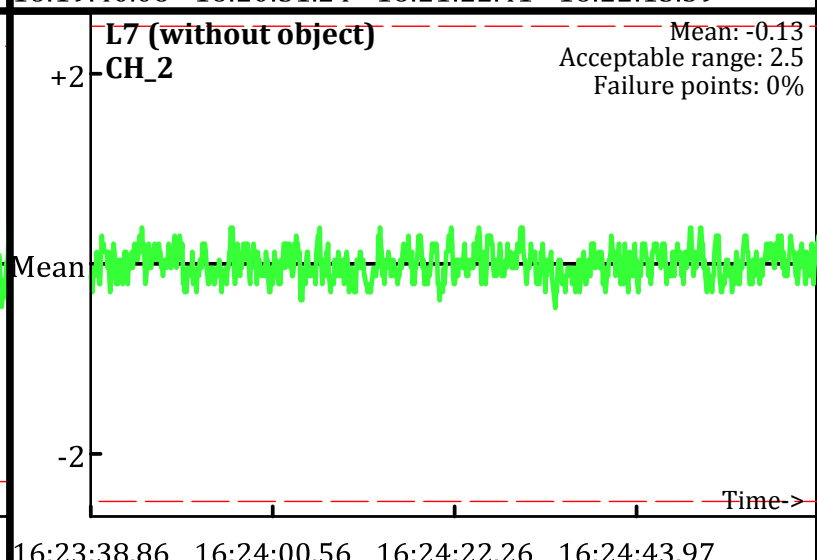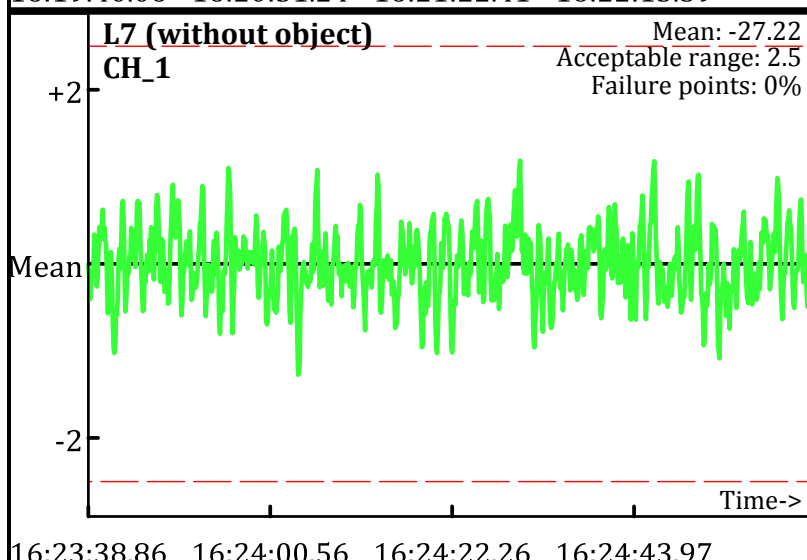PM test
Operator: BG & BS
Date: 7/29/2009

L5 (without object)
CH_1
Mean: -27.49
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:15:11.27   16:15:57.47   16:16:43.67   16:17:29.87

L5 (without object)
CH_2
Mean: -0.36
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:15:11.27   16:15:57.47   16:16:43.67   16:17:29.87

L6 (with object)
CH_1
Mean: 228.71
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:19:40.06   16:20:31.24   16:21:22.41   16:22:13.59

L6 (with object)
CH_2
Mean: 185.66
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:19:40.06   16:20:31.24   16:21:22.41   16:22:13.59

L7 (without object)
CH_1
Mean: -27.22
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:23:38.86   16:24:00.56   16:24:22.26   16:24:43.97

L7 (without object)
CH_2
Mean: -0.13
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:23:38.86   16:24:00.56   16:24:22.26   16:24:43.97

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
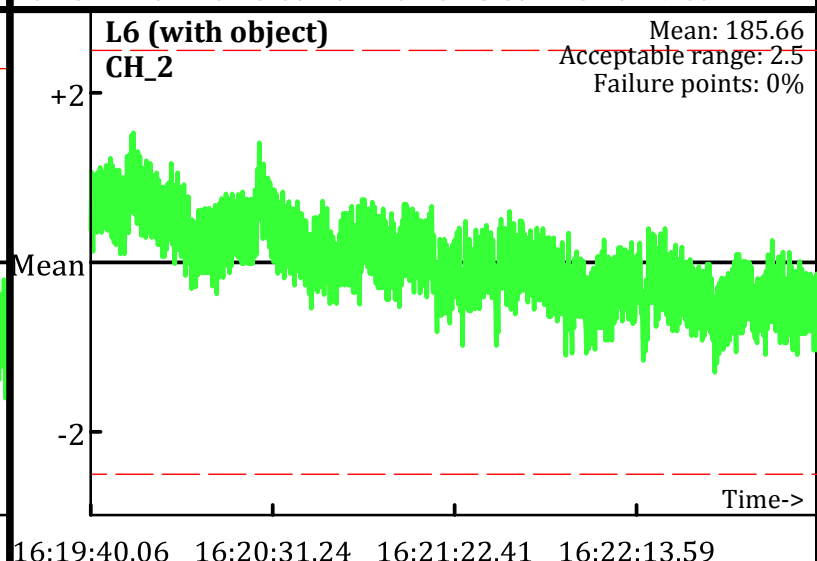Line Name: L5 L6 L7

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
- - - Acceptable limits
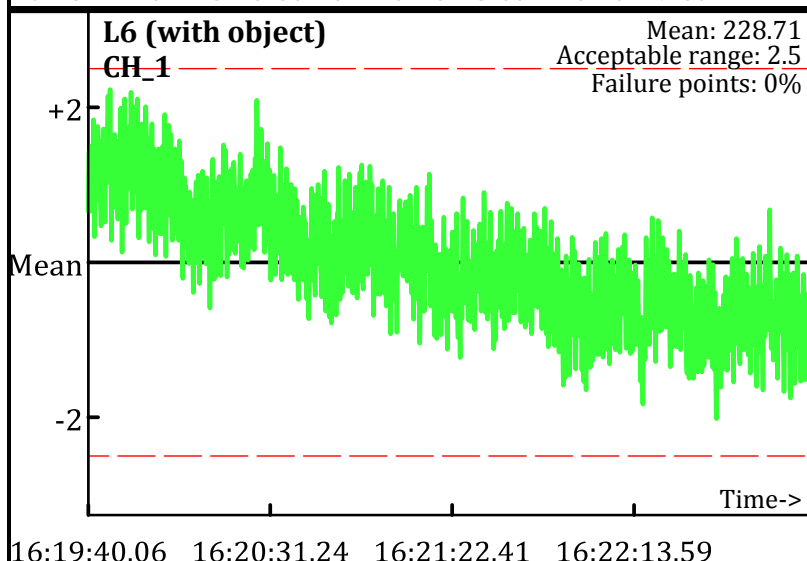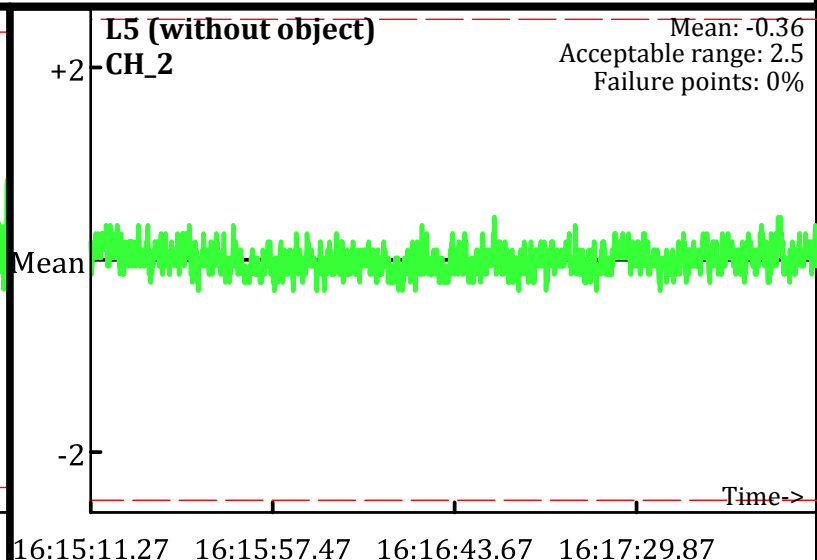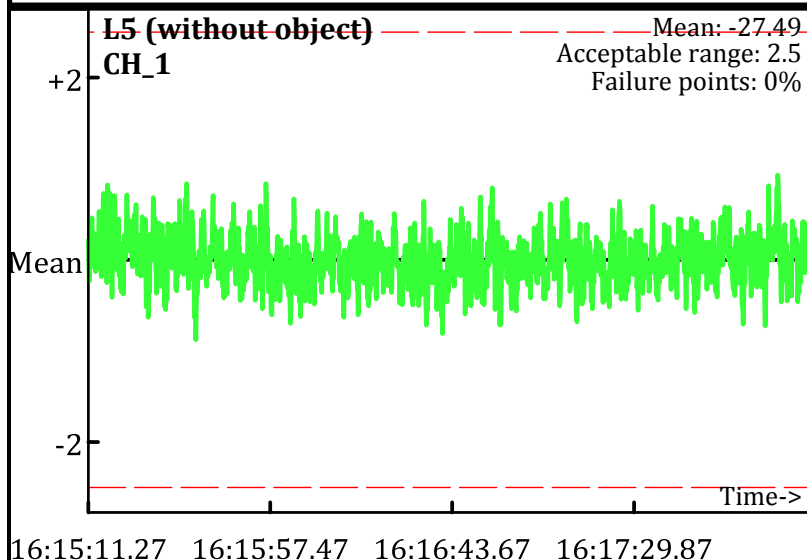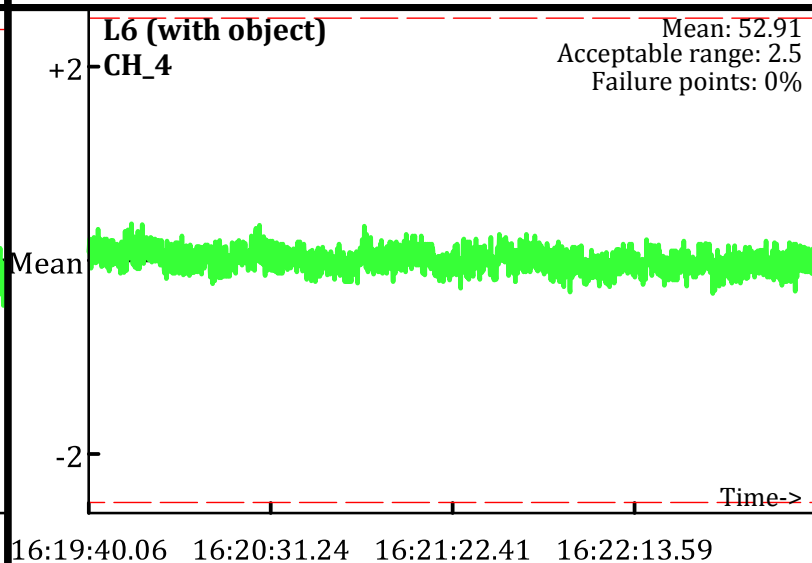
PM test
Operator: BG & BS
Date: 7/29/2009

L5 (without object)
CH_3
Mean: -1.32
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
16:15:11.27   16:15:57.47   16:16:43.67   16:17:29.87

L5 (without object)
CH_4
Mean: -5.85
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
16:15:11.27   16:15:57.47   16:16:43.67   16:17:29.87

L6 (with object)
CH_3
Mean: 113.59
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
16:19:40.06   16:20:31.24   16:21:22.41   16:22:13.59

L6 (with object)
CH_4
Mean: 52.91
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
16:19:40.06   16:20:31.24   16:21:22.41   16:22:13.59

L7 (without object)
CH_3
Mean: -1.23
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
16:23:38.86   16:24:00.56   16:24:22.26   16:24:43.97

L7 (without object)
CH_4
Mean: -5.84
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
16:23:38.86   16:24:00.56   16:24:22.26   16:24:43.97

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
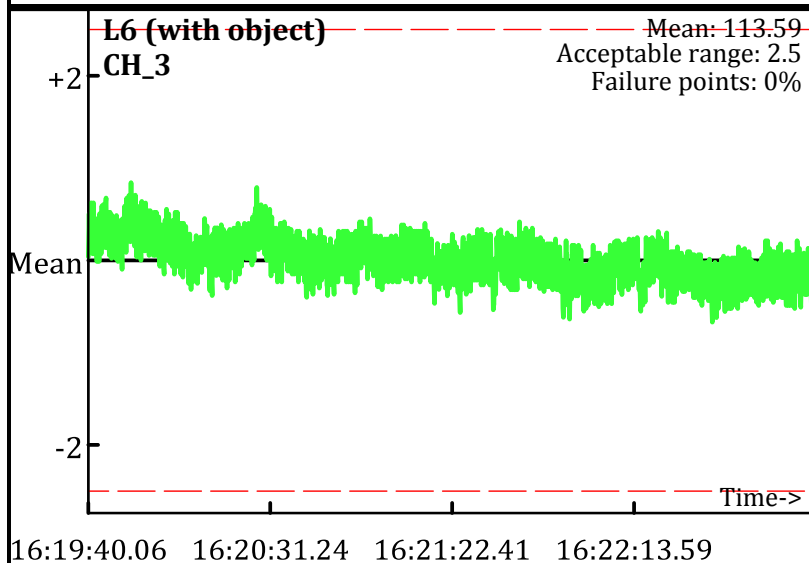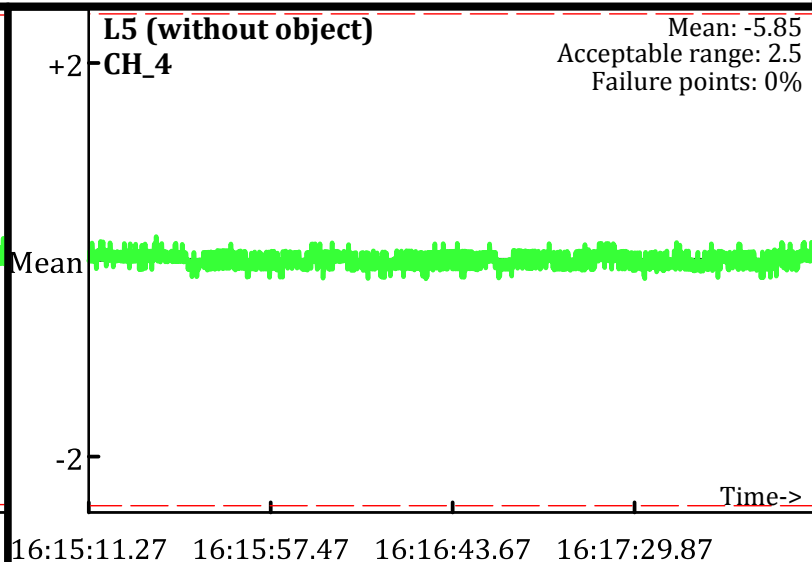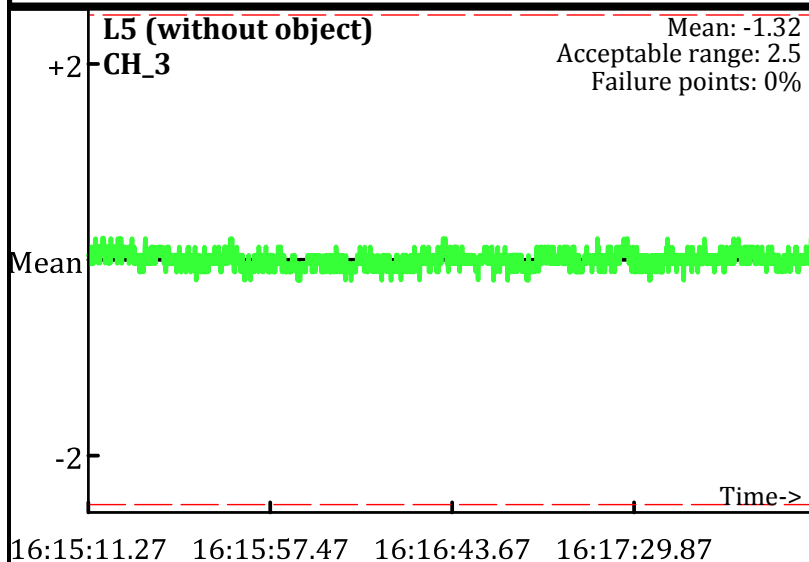Line Name: L5 L6 L7

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
-- -- Acceptable limits
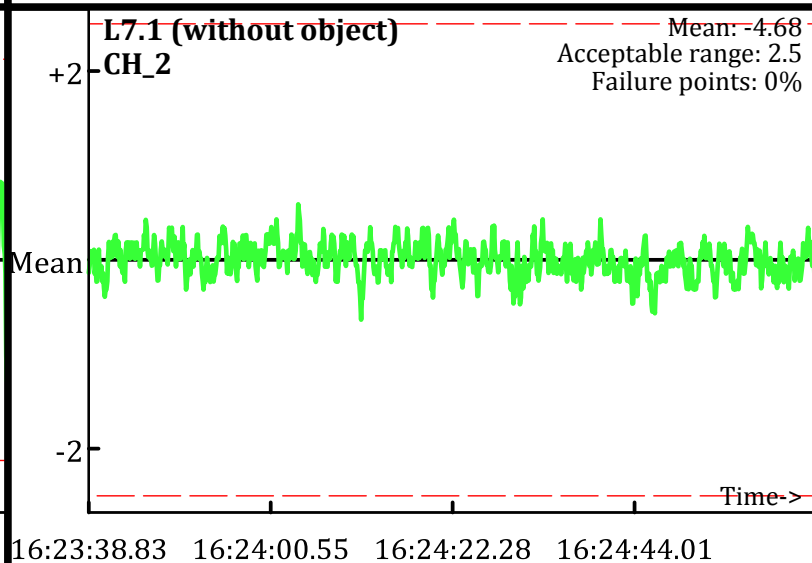
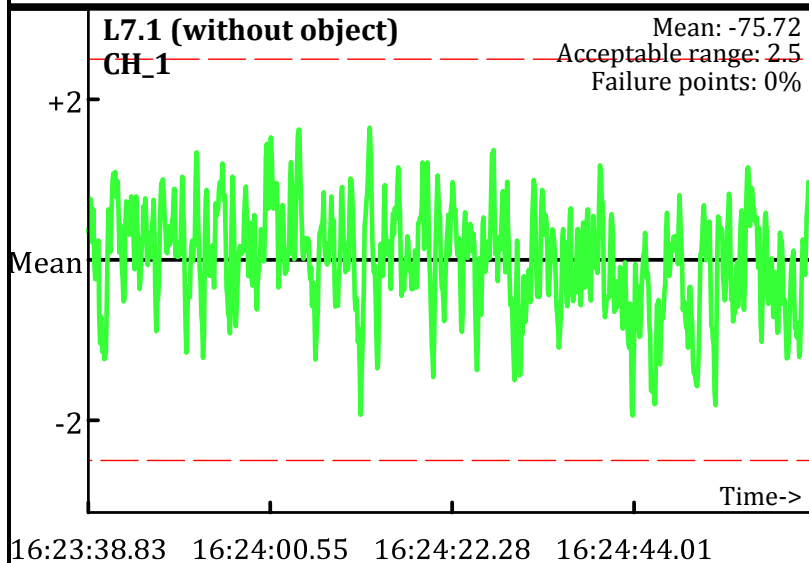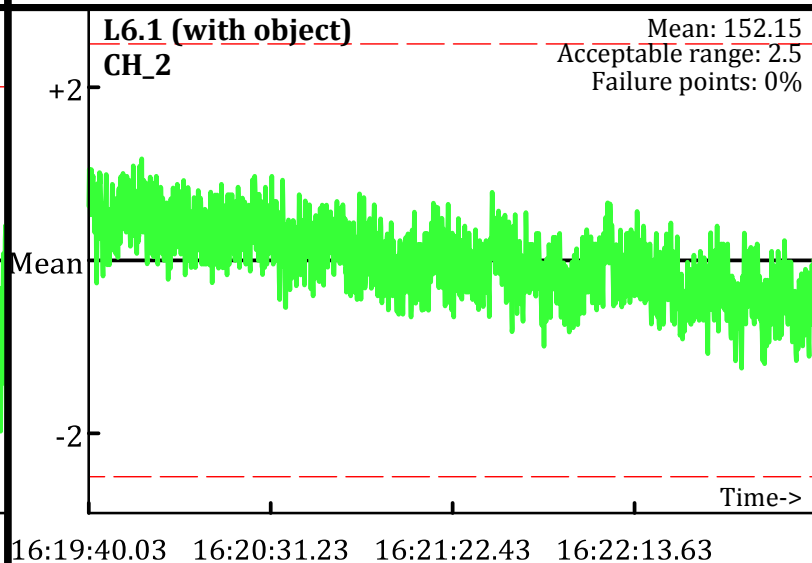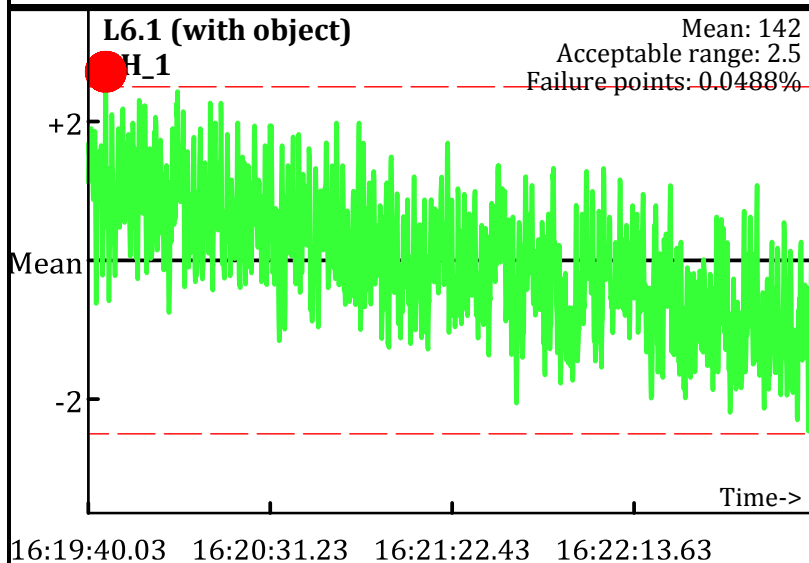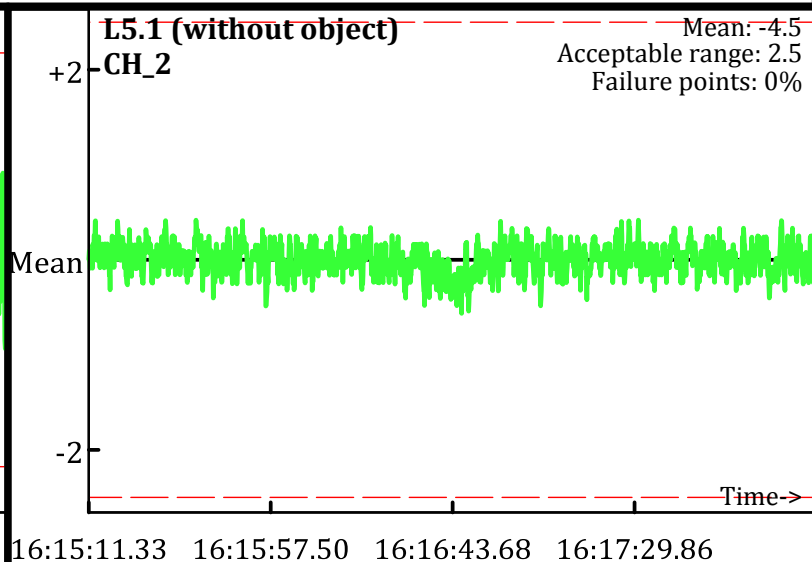PM test
Operator: BG & BS
Date: 7/29/2009

L5.1 (without object)
CH_1
Mean: -74.59
Acceptable range: 2.5
Failure points: 0%

Time->
16:15:11.33   16:15:57.50   16:16:43.68   16:17:29.86

L5.1 (without object)
CH_2
Mean: -4.5
Acceptable range: 2.5
Failure points: 0%

Time->
16:15:11.33   16:15:57.50   16:16:43.68   16:17:29.86

L6.1 (with object)
CH_1
Mean: 142
Acceptable range: 2.5
Failure points: 0.0488%

Time->
16:19:40.03   16:20:31.23   16:21:22.43   16:22:13.63

L6.1 (with object)
CH_2
Mean: 152.15
Acceptable range: 2.5
Failure points: 0%

Time->
16:19:40.03   16:20:31.23   16:21:22.43   16:22:13.63

L7.1 (without object)
CH_1
Mean: -75.72
Acceptable range: 2.5
Failure points: 0%

Time->
16:23:38.83   16:24:00.55   16:24:22.28   16:24:44.01

L7.1 (without object)
CH_2
Mean: -4.68
Acceptable range: 2.5
Failure points: 0%

Time->
16:23:38.83   16:24:00.55   16:24:22.28   16:24:44.01

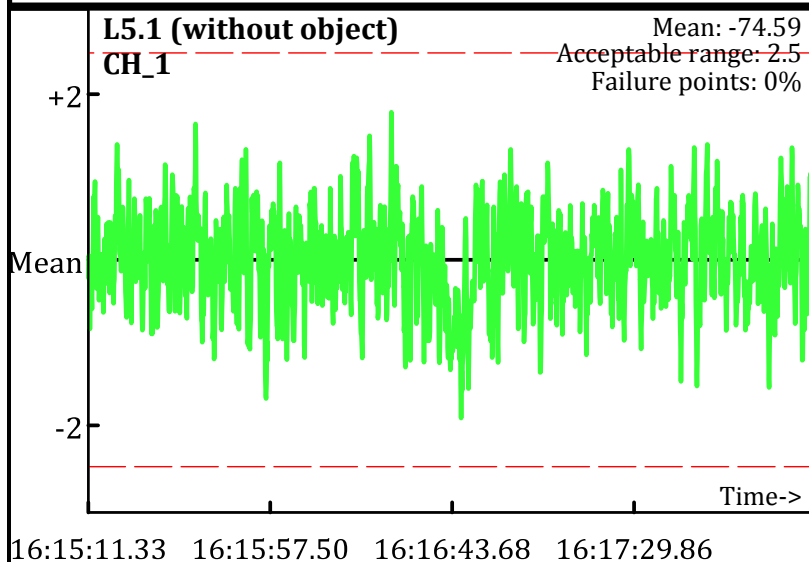Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L5.1 L6.1 L7.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
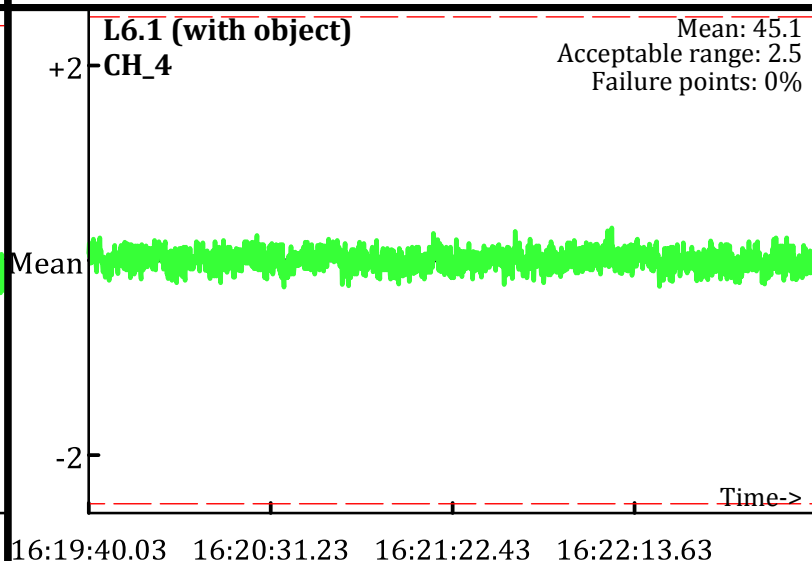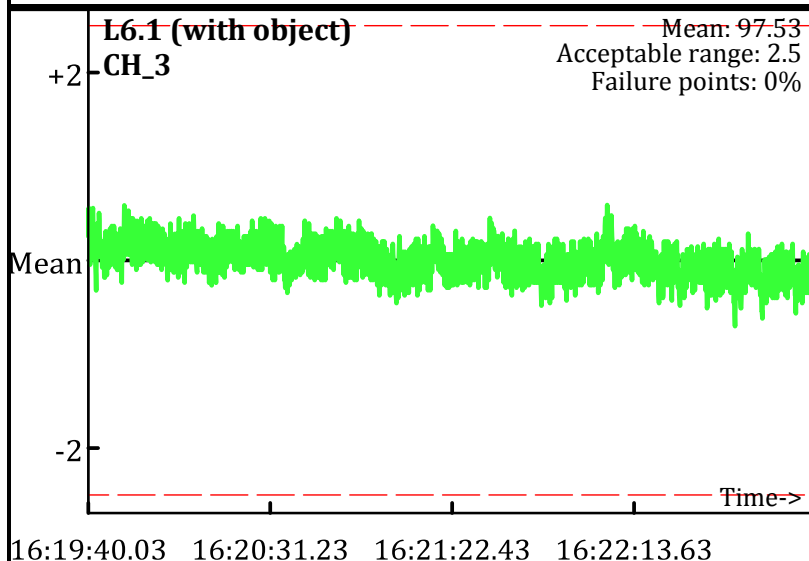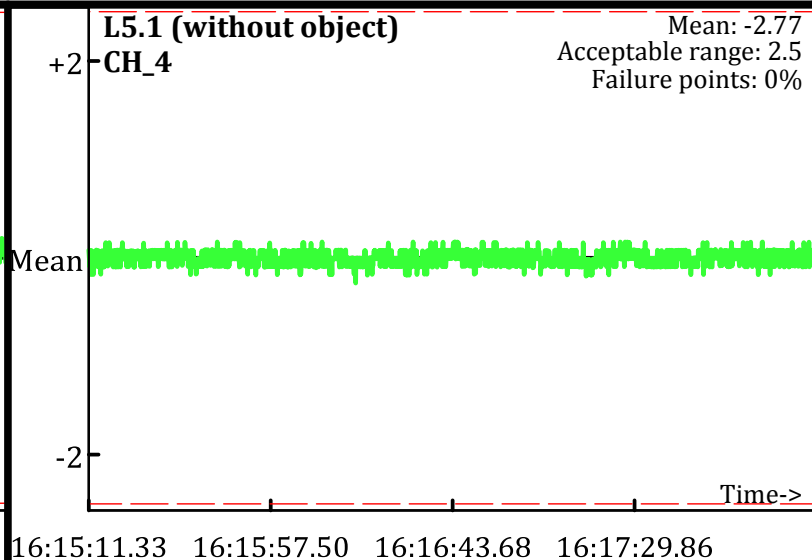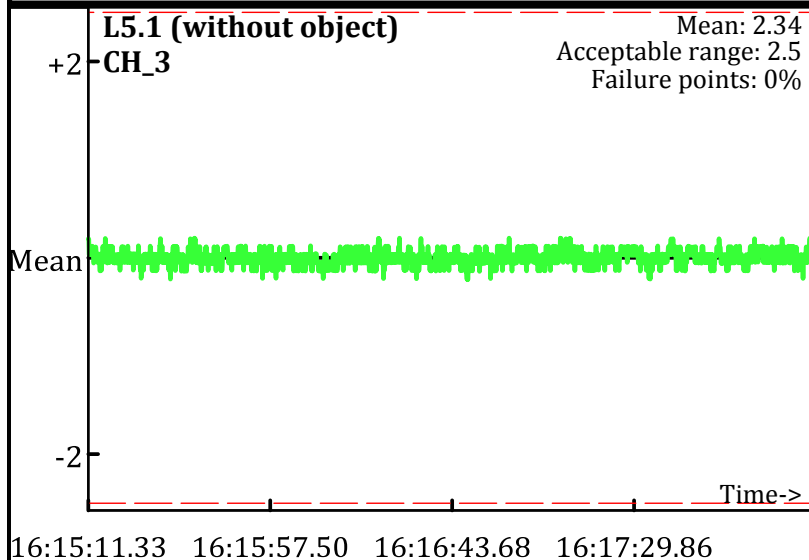Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/29/2009

L5.1 (without object)
CH_3
Mean: 2.34
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:11.33   16:15:57.50   16:16:43.68   16:17:29.86

L5.1 (without object)
CH_4
Mean: -2.77
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:15:11.33   16:15:57.50   16:16:43.68   16:17:29.86

L6.1 (with object)
CH_3
Mean: 97.53
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:19:40.03   16:20:31.23   16:21:22.43   16:22:13.63

L6.1 (with object)
CH_4
Mean: 45.1
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:19:40.03   16:20:31.23   16:21:22.43   16:22:13.63

L7.1 (without object)
CH_3
Mean: 2.39
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:23:38.83   16:24:00.55   16:24:22.28   16:24:44.01

L7.1 (without object)
CH_4
Mean: -2.73
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

16:23:38.83   16:24:00.55   16:24:22.28   16:24:44.01

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L5.1 L6.1 L7.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
– – – Acceptable limits
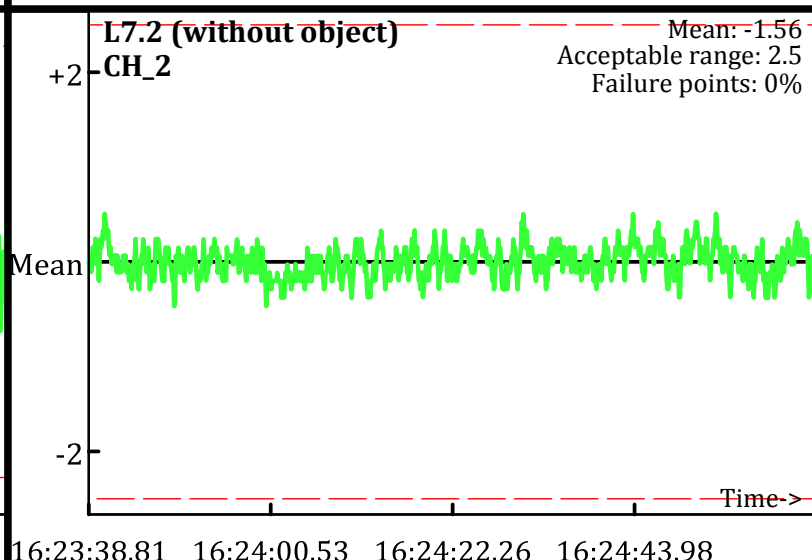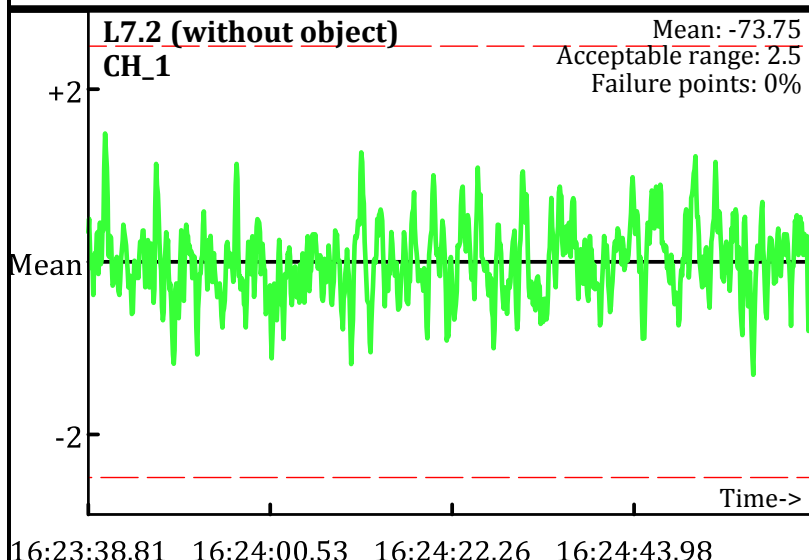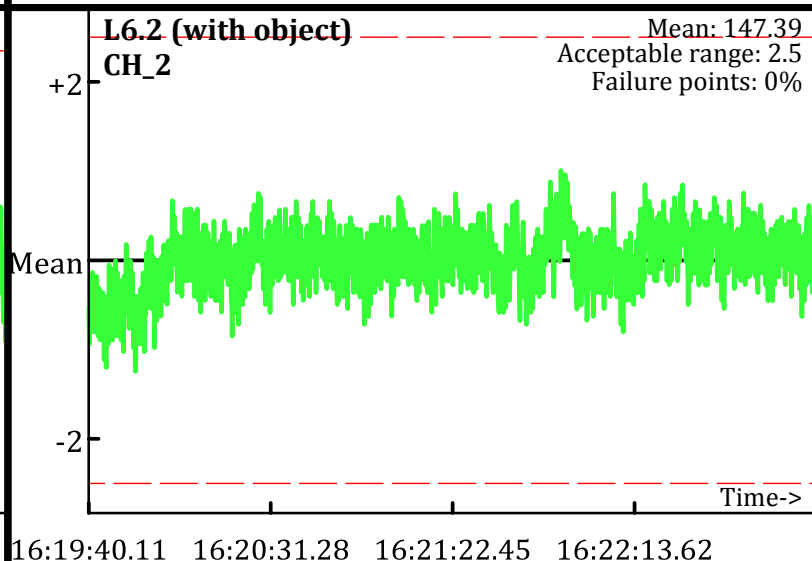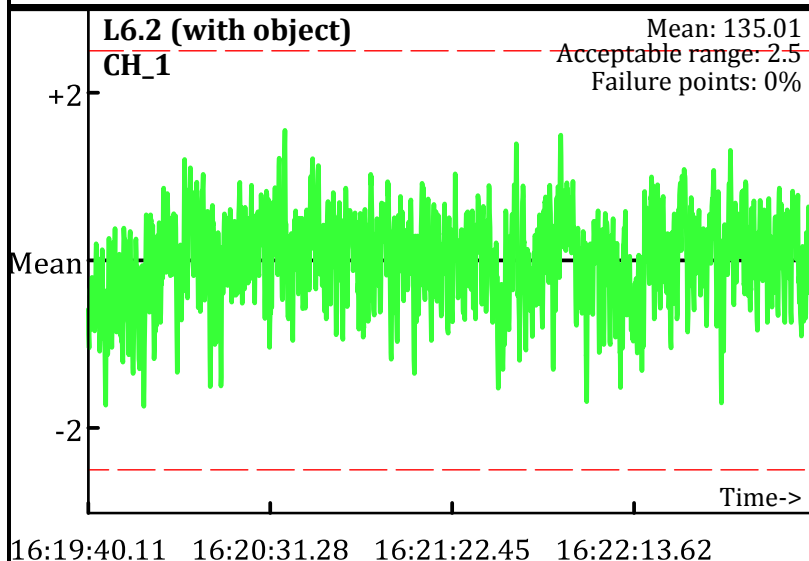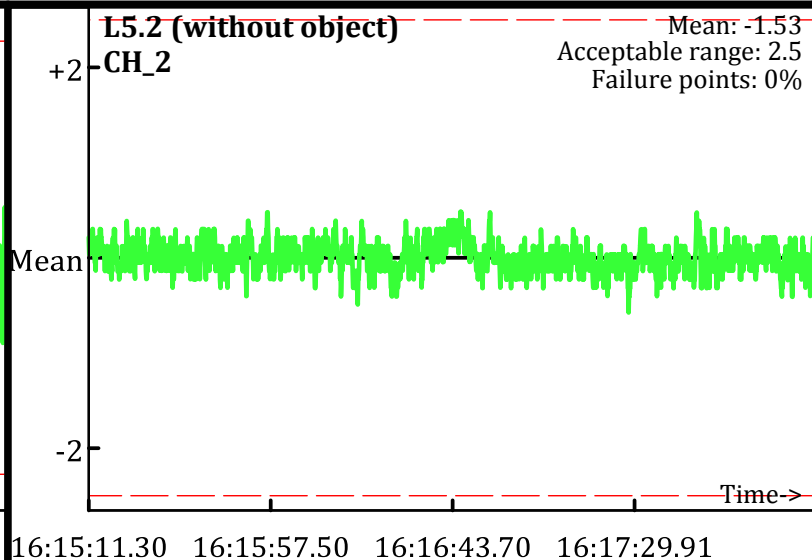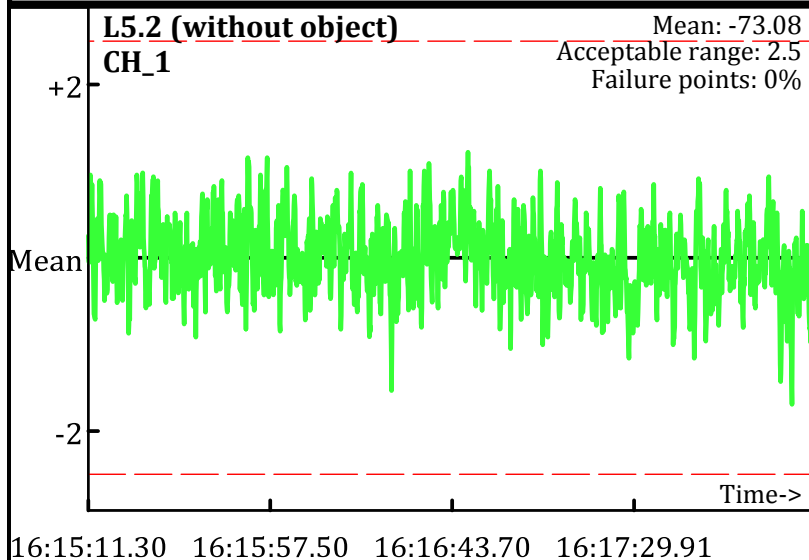
PM test
Operator: BG & BS
Date: 7/29/2009

L5.2 (without object)
CH_1
Mean: -73.08
Acceptable range: 2.5
Failure points: 0%

L5.2 (without object)
CH_2
Mean: -1.53
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_1
Mean: 135.01
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_2
Mean: 147.39
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_1
Mean: -73.75
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_2
Mean: -1.56
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L5.2 L6.2 L7.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
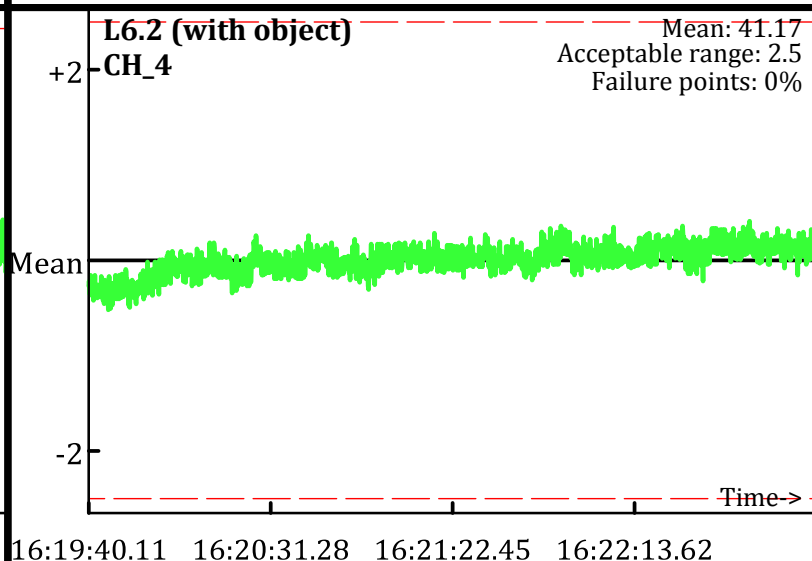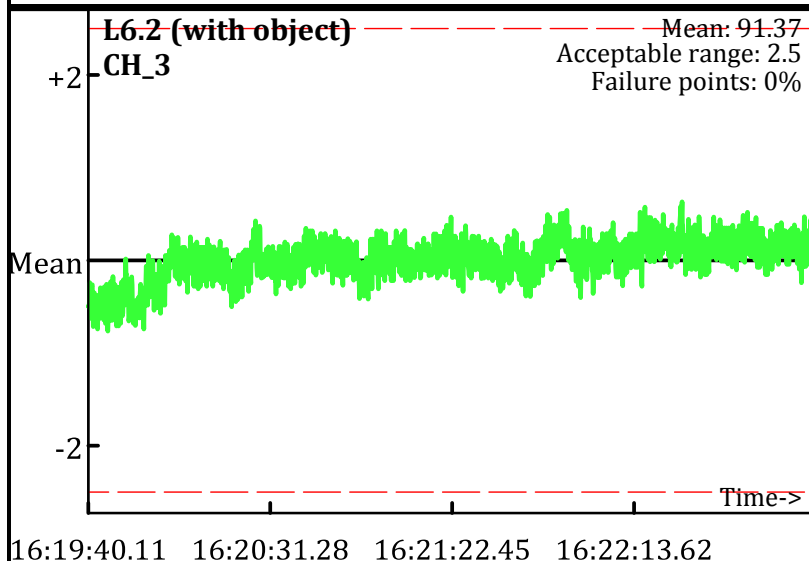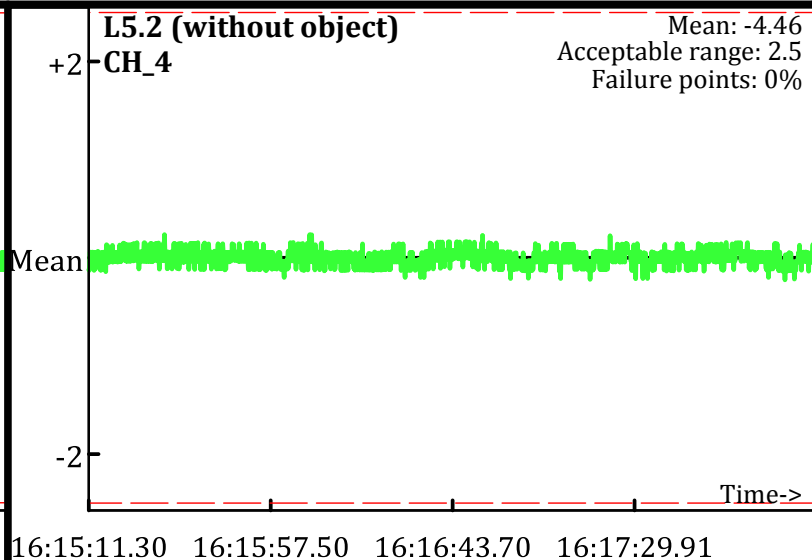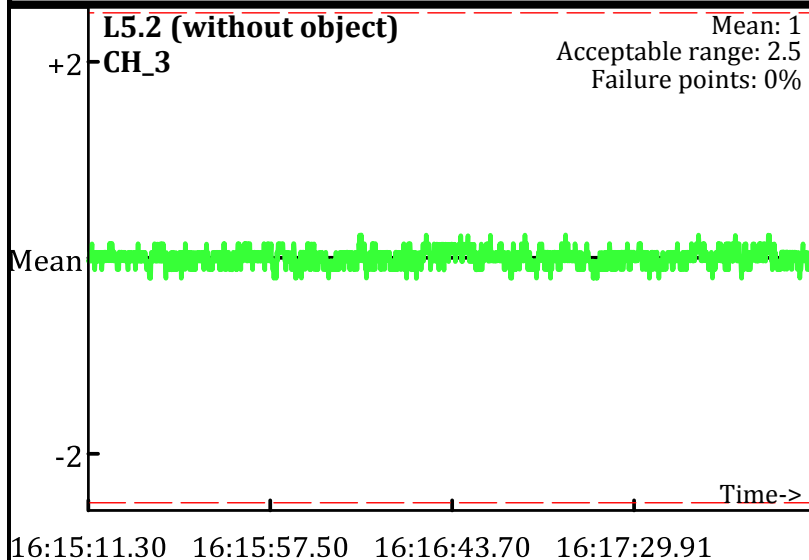Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/29/2009

L5.2 (without object)
CH_3
Mean: 1
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:15:11.30   16:15:57.50   16:16:43.70   16:17:29.91

L5.2 (without object)
CH_4
Mean: -4.46
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:15:11.30   16:15:57.50   16:16:43.70   16:17:29.91

L6.2 (with object)
CH_3
Mean: 91.37
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:19:40.11   16:20:31.28   16:21:22.45   16:22:13.62

L6.2 (with object)
CH_4
Mean: 41.17
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:19:40.11   16:20:31.28   16:21:22.45   16:22:13.62

L7.2 (without object)
CH_3
Mean: 1.06
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:23:38.81   16:24:00.53   16:24:22.26   16:24:43.98

L7.2 (without object)
CH_4
Mean: -4.43
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->
16:23:38.81   16:24:00.53   16:24:22.26   16:24:43.98

Database: C:_QCReports_Ord_Data\072909\QC\072909_TA_QC.gdb
Line Name: L5.2 L6.2 L7.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
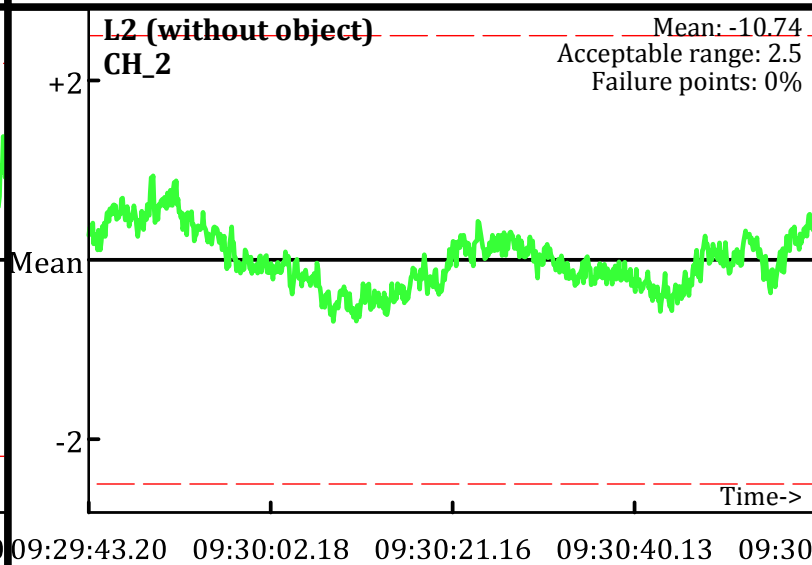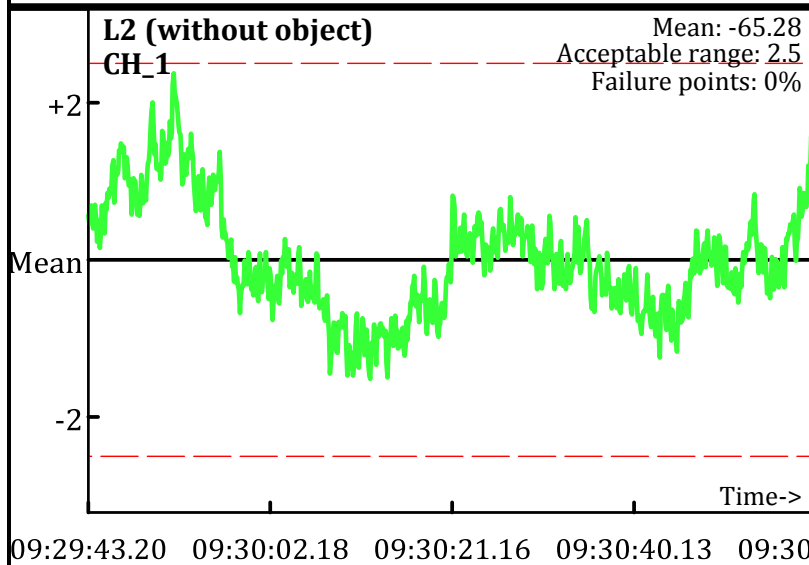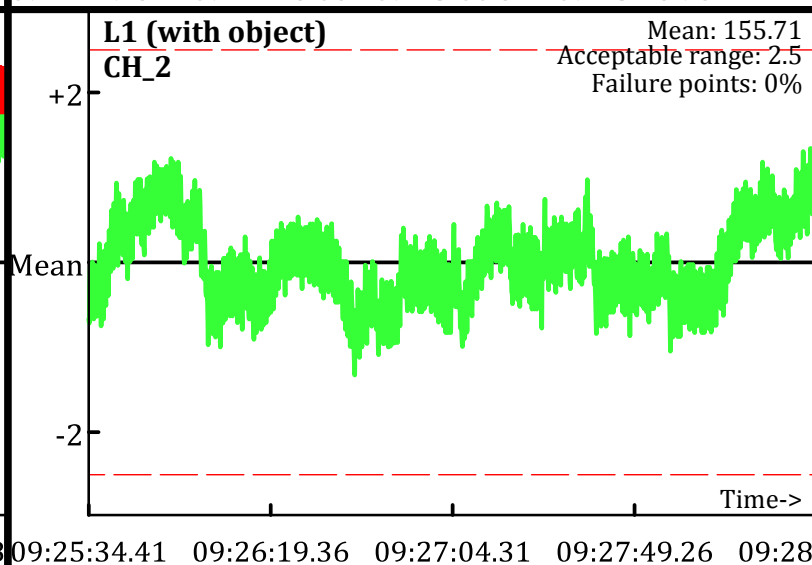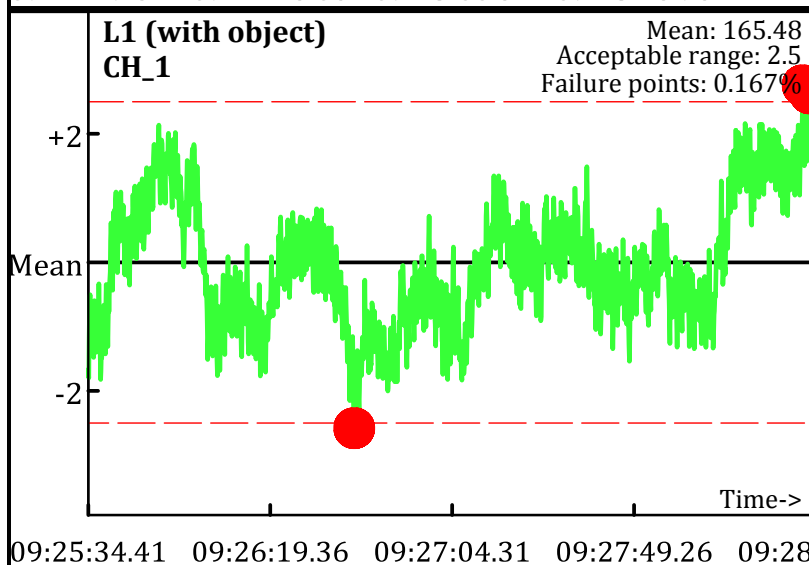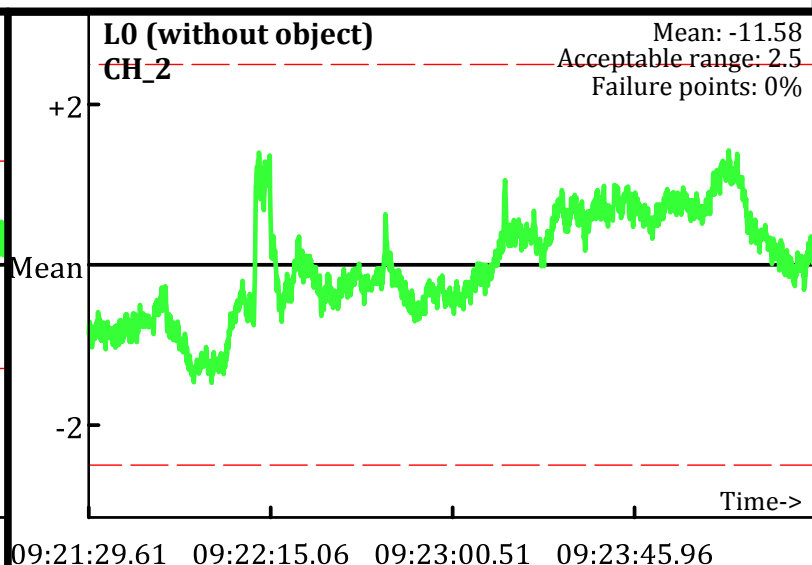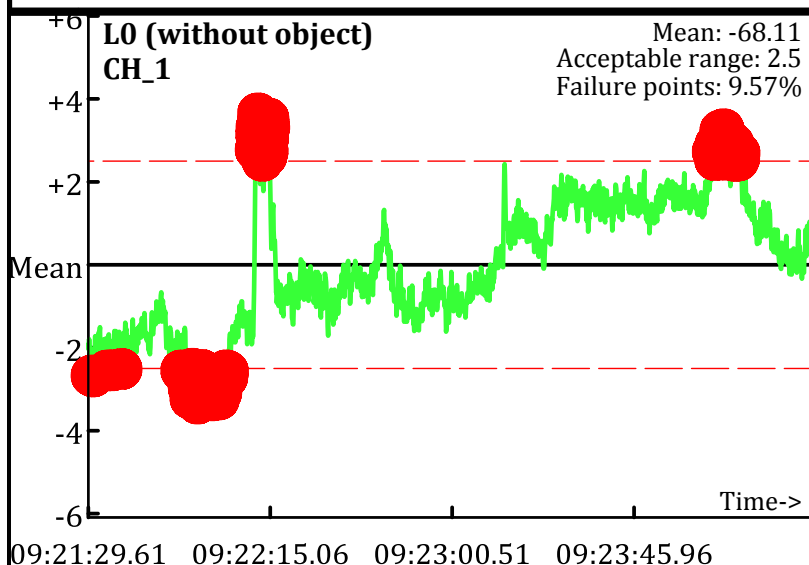-- Acceptable limits

AM test
Operator: BG & BS
Date: 7/30/2009

L0 (without object)
CH_1
Mean: -68.11
Acceptable range: 2.5
Failure points: 9.57%

L0 (without object)
CH_2
Mean: -11.58
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_1
Mean: 165.48
Acceptable range: 2.5
Failure points: 0.167%

L1 (with object)
CH_2
Mean: 155.71
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_1
Mean: -65.28
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_2
Mean: -10.74
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
— — Acceptable limits

AM test
Operator: BG & BS
Date: 7/30/2009
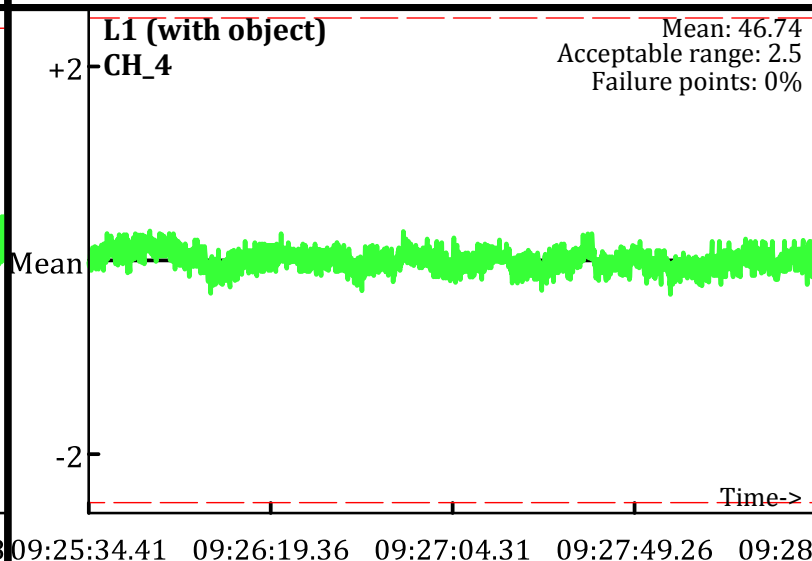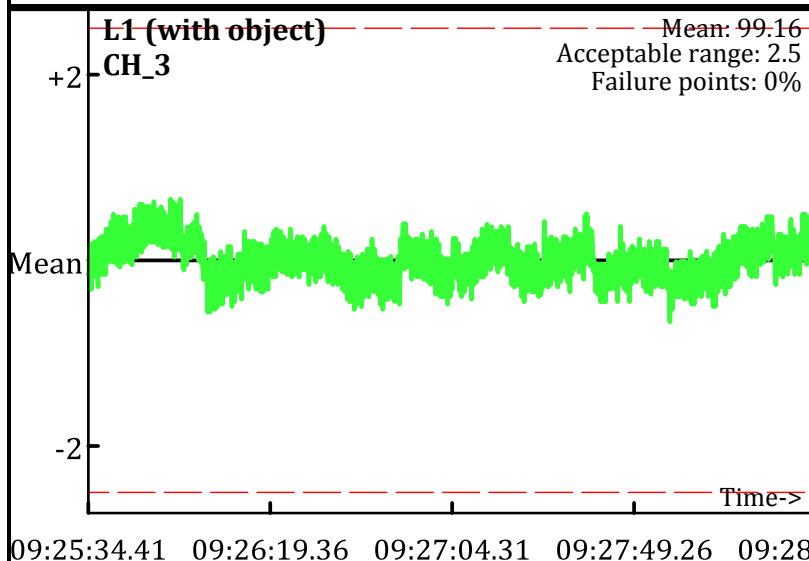

L0 (without object)
CH_3
Mean: -3.42
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_4
Mean: -5.65
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_3
Mean: 99.16
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_4
Mean: 46.74
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_3
Mean: -3.22
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_4
Mean: -5.67
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
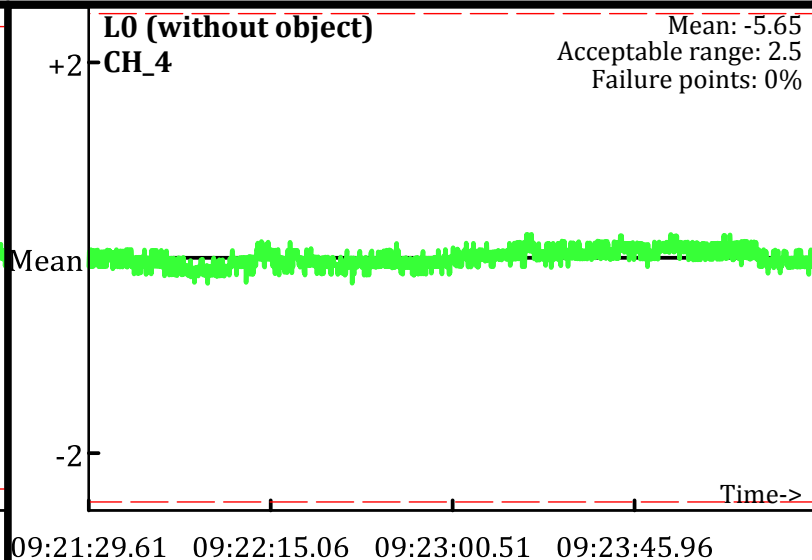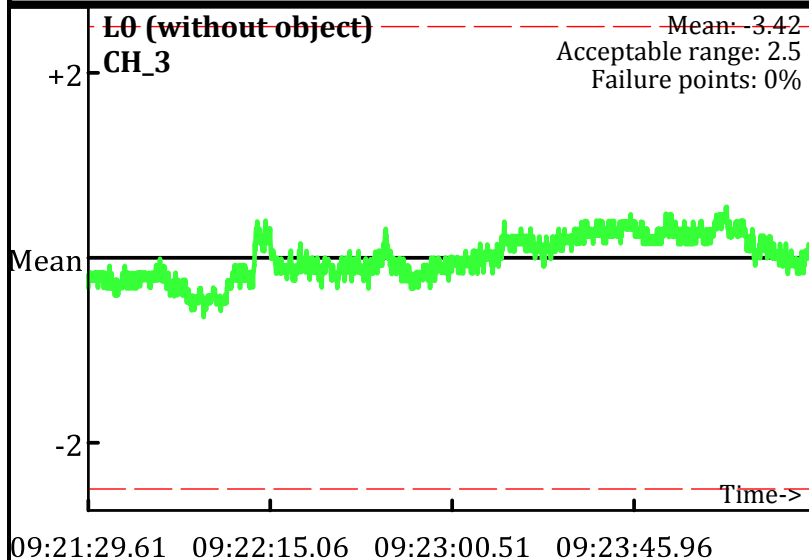Line Name: L0 L1 L2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

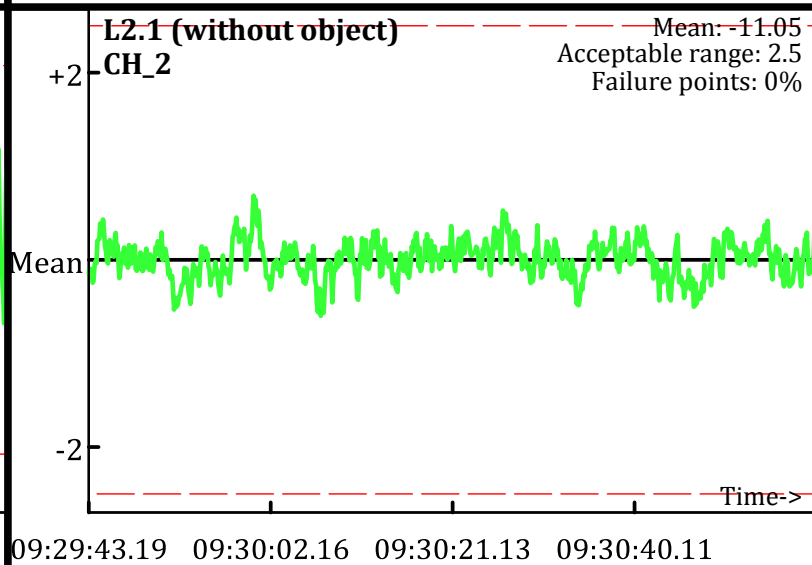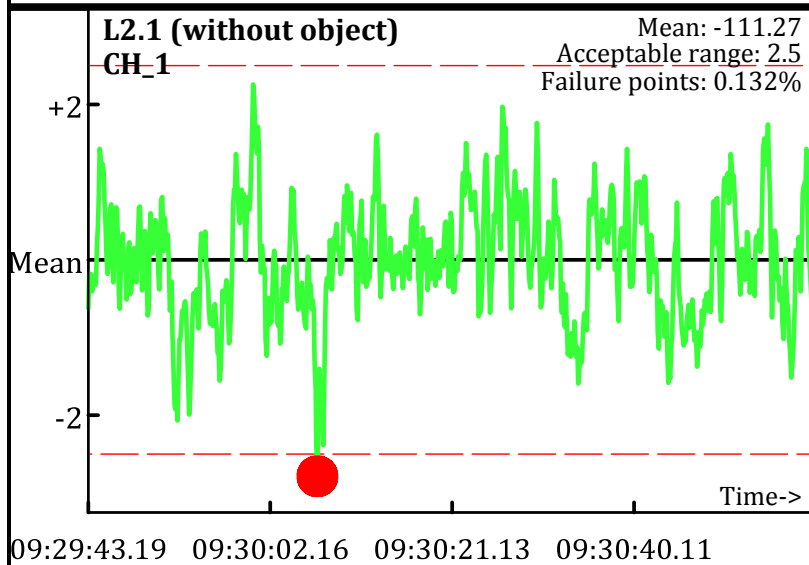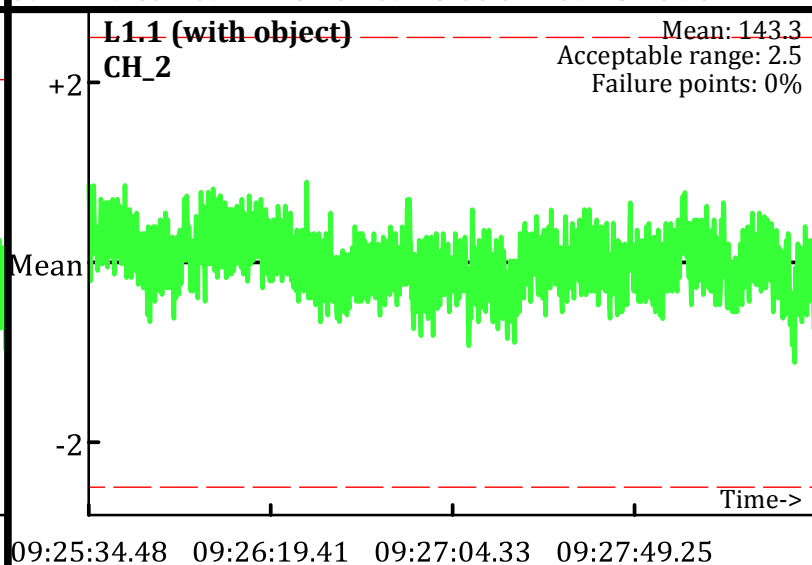AM test
Operator: BG & BS
Date: 7/30/2009

L0.1 (without object)
CH_1

Mean: -112.53
Acceptable range: 2.5
Failure points: 1.49%

+2

Mean

-2

Time->

09:21:29.67   09:22:15.10   09:23:00.52   09:23:45.95

L0.1 (without object)
CH_2

Mean: -11.34
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

09:21:29.67   09:22:15.10   09:23:00.52   09:23:45.95

L1.1 (with object)
CH_1

Mean: 101.83
Acceptable range: 2.5
Failure points: 0.167%

+2

Mean

-2

Time->

09:25:34.48   09:26:19.41   09:27:04.33   09:27:49.25

L1.1 (with object)
CH_2

Mean: 143.3
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

09:25:34.48   09:26:19.41   09:27:04.33   09:27:49.25

L2.1 (without object)
CH_1

Mean: -111.27
Acceptable range: 2.5
Failure points: 0.132%

+2

Mean

-2

Time->

09:29:43.19   09:30:02.16   09:30:21.13   09:30:40.11

L2.1 (without object)
CH_2

Mean: -11.05
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

09:29:43.19   09:30:02.16   09:30:21.13   09:30:40.11

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

🔴 Outside range
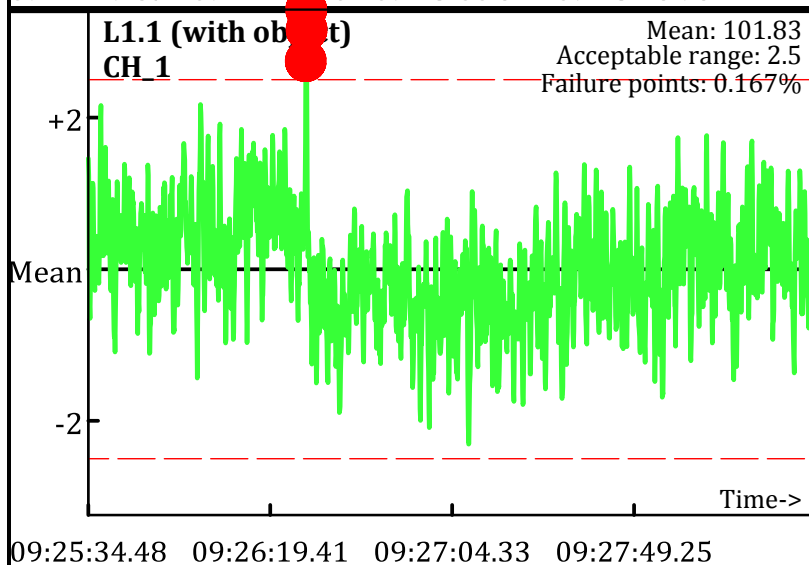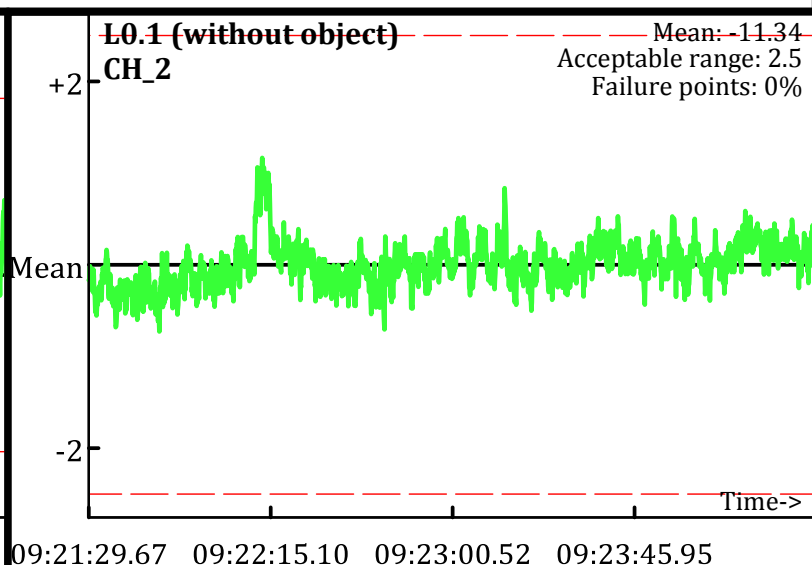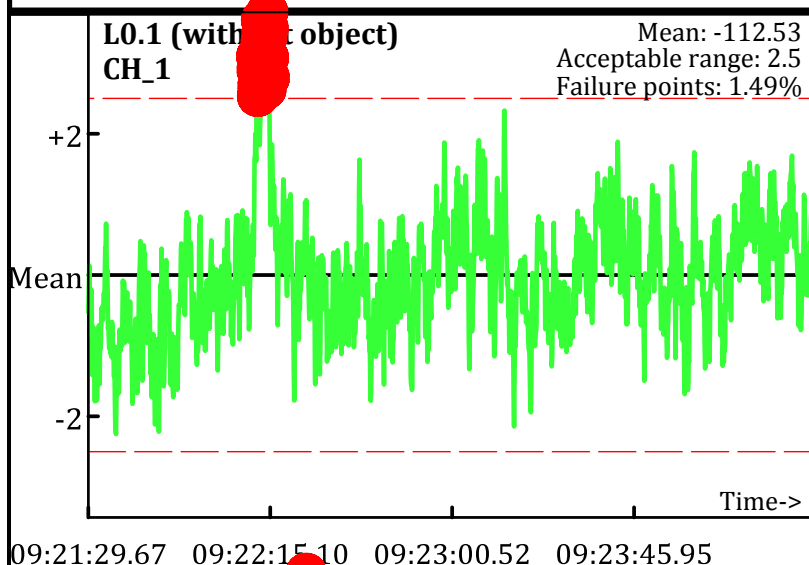--- Acceptable limits

AM test
Operator: BG & BS
Date: 7/30/2009

L0.1 (without object)
CH_3
Mean: 2.23
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:21:29.67　09:22:15.10　09:23:00.52　09:23:45.95

L0.1 (without object)
CH_4
Mean: -2.32
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:21:29.67　09:22:15.10　09:23:00.52　09:23:45.95

L1.1 (with object)
CH_3
Mean: 96.83
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:34.48　09:26:19.41　09:27:04.33　09:27:49.25

L1.1 (with object)
CH_4
Mean: 45.95
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:25:34.48　09:26:19.41　09:27:04.33　09:27:49.25

L2.1 (without object)
CH_3
Mean: 2.31
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2
Time->

09:29:43.19　09:30:02.16　09:30:21.13　09:30:40.11

L2.1 (without object)
CH_4
Mean: -2.31
Acceptable range: 2.5
Failure points: 0%

+2
Mean
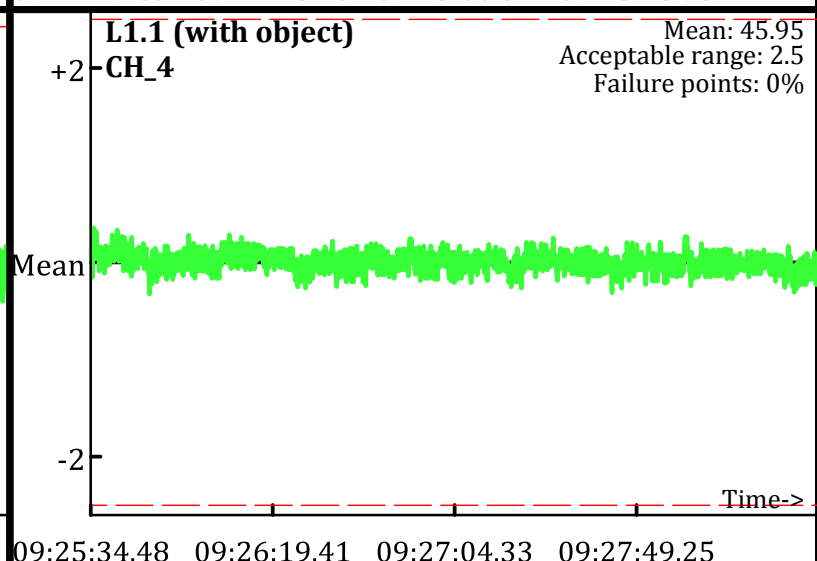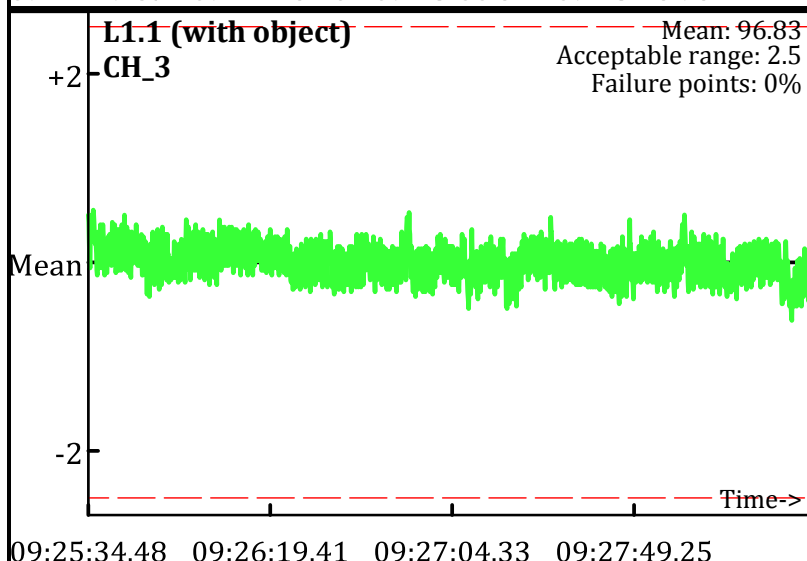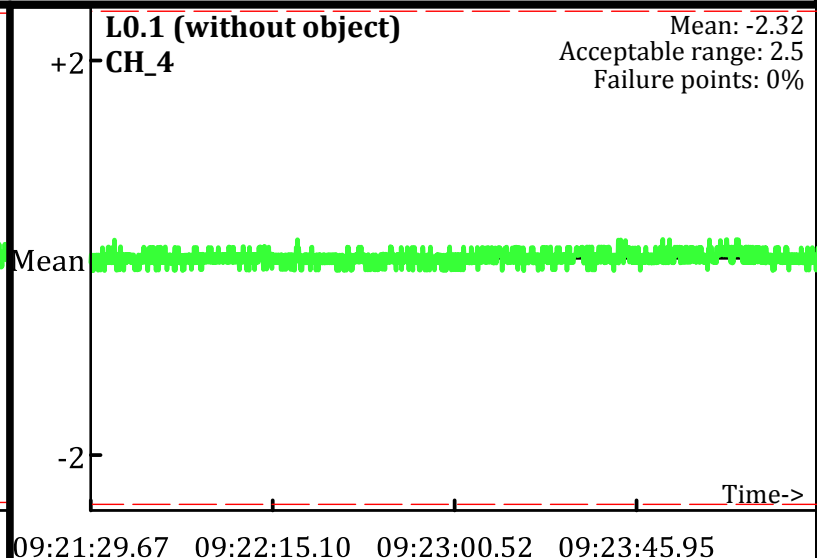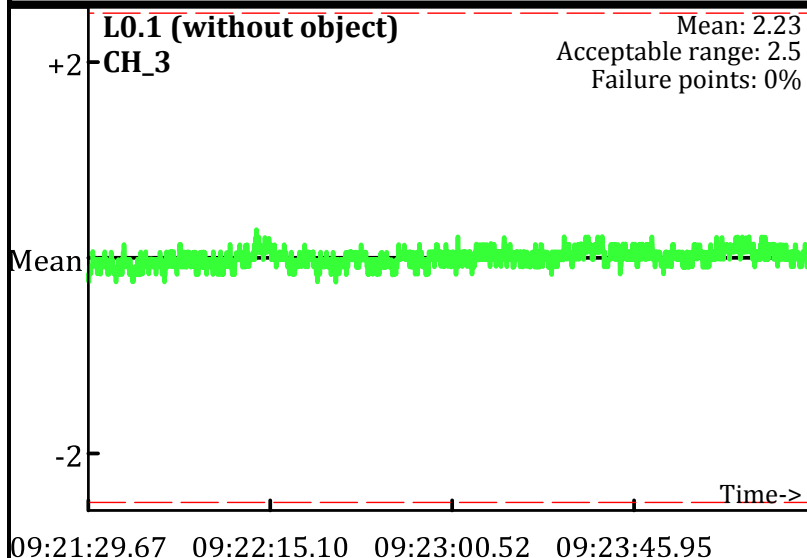-2
Time->

09:29:43.19　09:30:02.16　09:30:21.13　09:30:40.11

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
-- Acceptable limits

AM test
Operator: BG & BS
Date: 7/30/2009
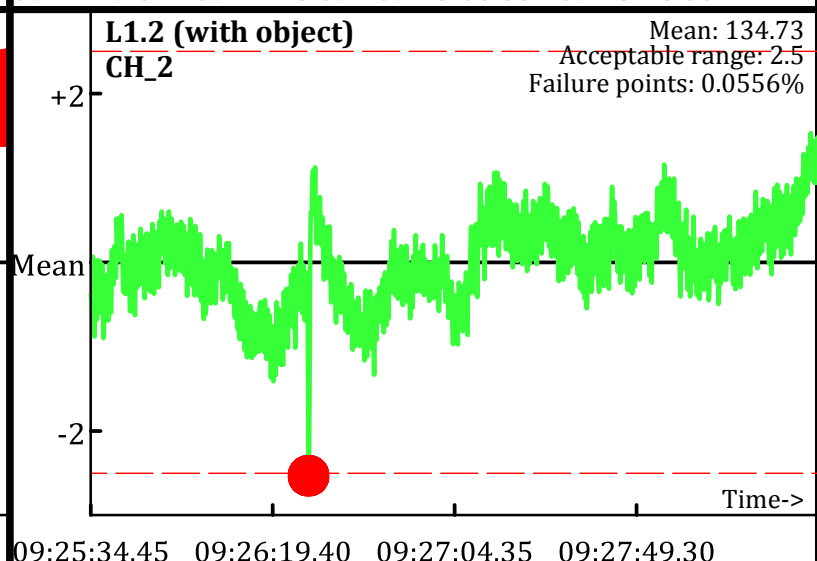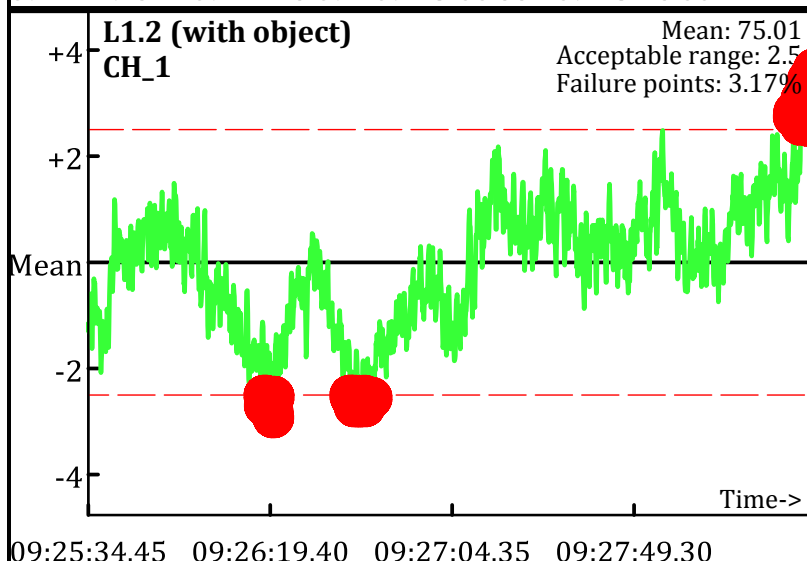
L0.2 (without object)
CH_1
Mean: -143.76
Acceptable range: 2.5
Failure points: 42.8%

L0.2 (without object)
CH_2
Mean: -21.36
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_1
Mean: 75.01
Acceptable range: 2.5
Failure points: 3.17%

L1.2 (with object)
CH_2
Mean: 134.73
Acceptable range: 2.5
Failure points: 0.0556%

L2.2 (without object)
CH_1
Mean: -137.13
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
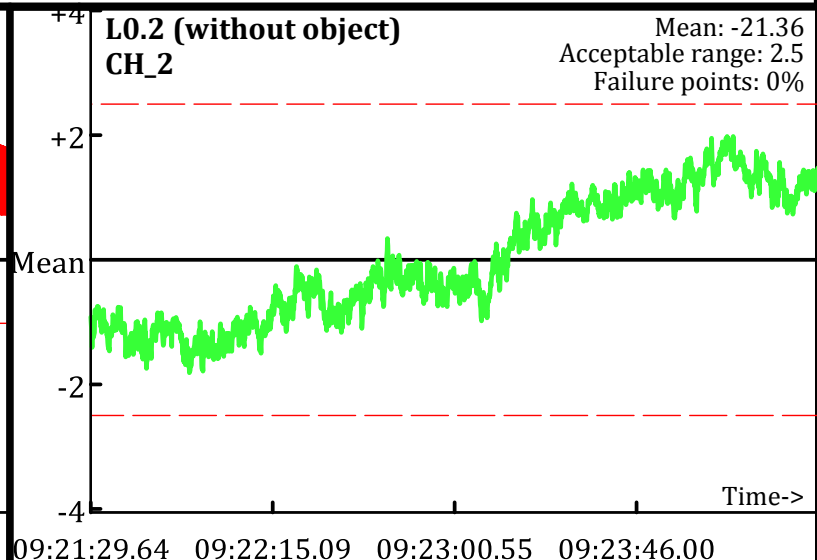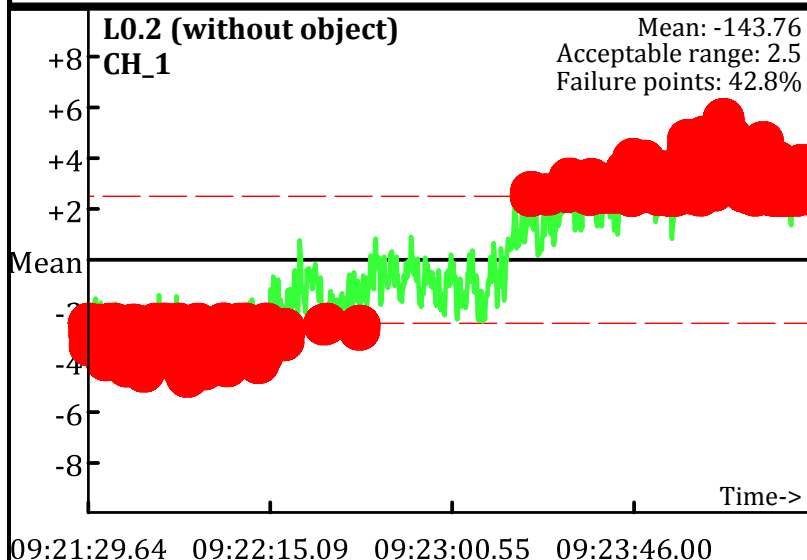**CH_2**
Mean: -19
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
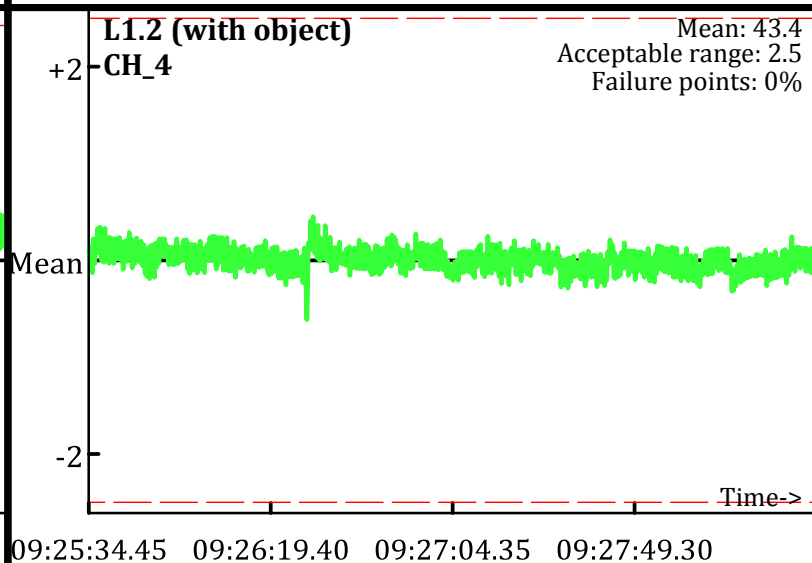Grid/Location: QC Area

● Outside range
--- Acceptable limits

AM test
Operator: BG & BS
Date: 7/30/2009

L0.2 (without object)
CH_3
Mean: -3.39
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_4
Mean: -5.2
Acceptable range: 2.5
Failure points: 0%

09:21:29.64　09:22:15.09　09:23:00.55　09:23:46.00

L1.2 (with object)
CH_3
Mean: 91.84
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_4
Mean: 43.4
Acceptable range: 2.5
Failure points: 0%

09:25:34.45　09:26:19.40　09:27:04.35　09:27:49.30

L2.2 (without object)
CH_3
Mean: -2.77
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_4
Mean: -4.99
Acceptable range: 2.5
Failure points: 0%

09:29:43.25　09:30:02.20　09:30:21.15　09:30:40.10

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
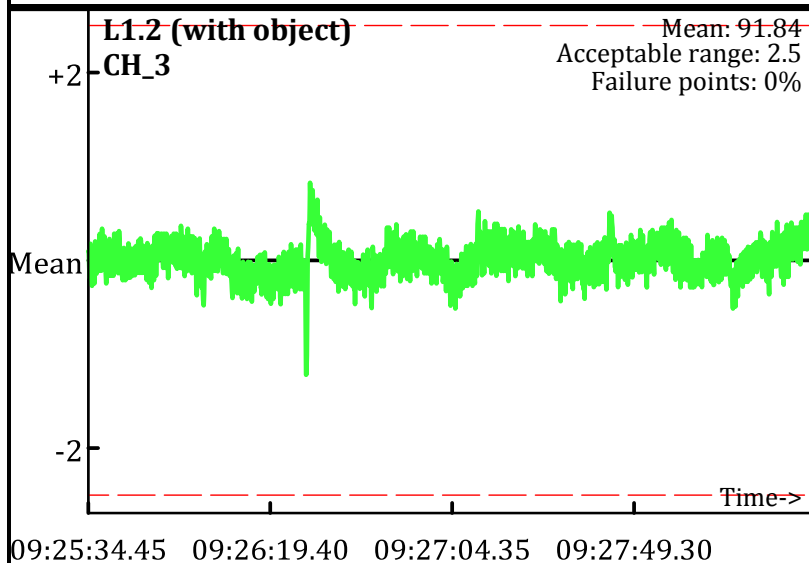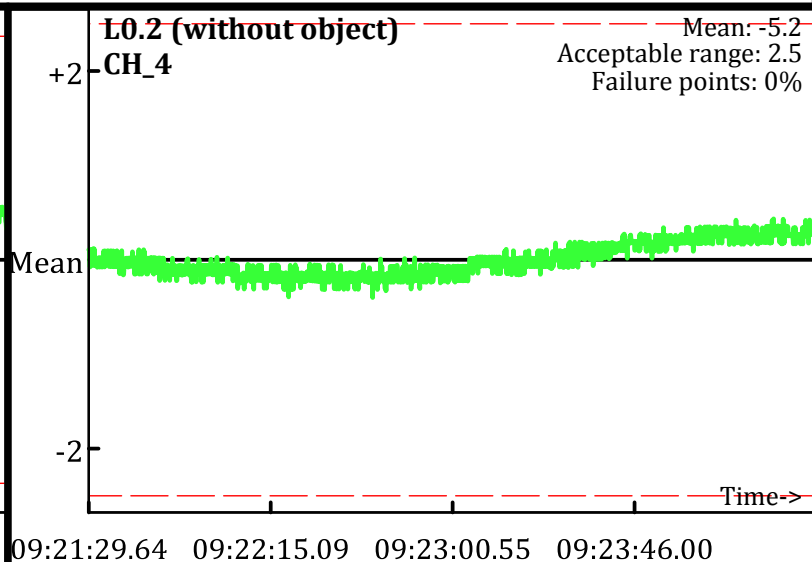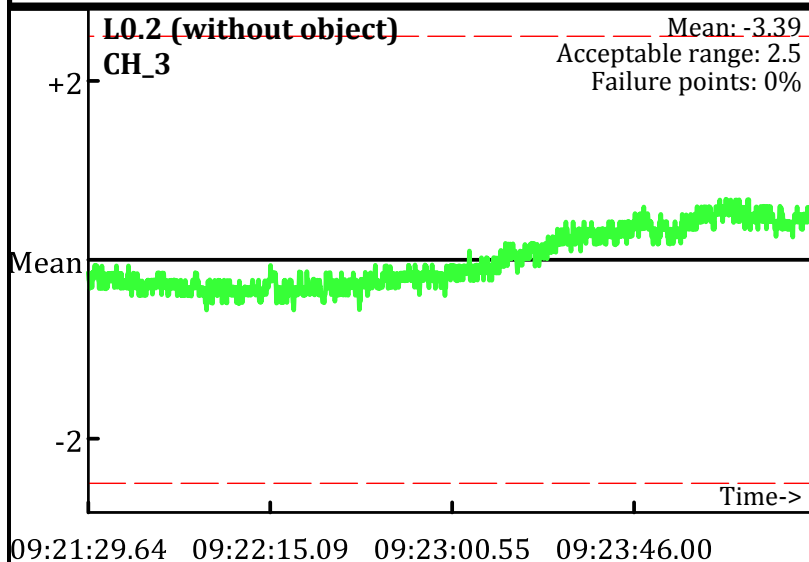Line Name: L0.2 L1.2 L2.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
— — Acceptable limits

PM test
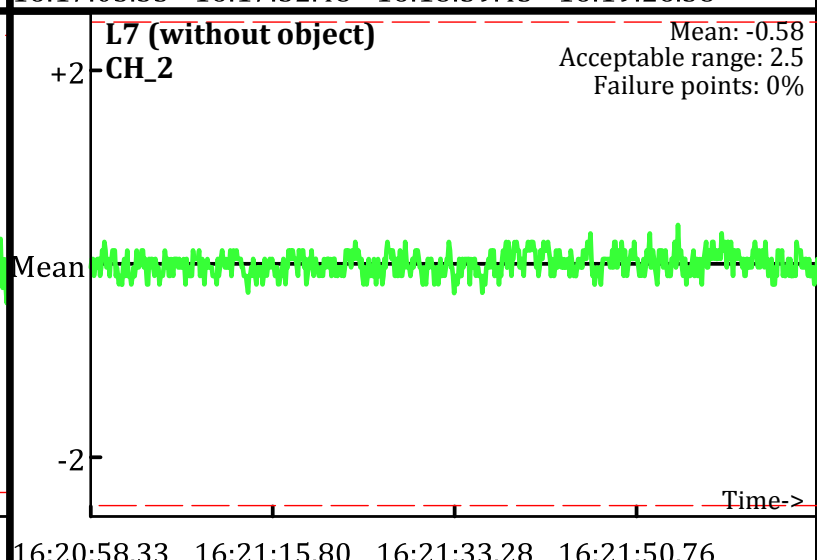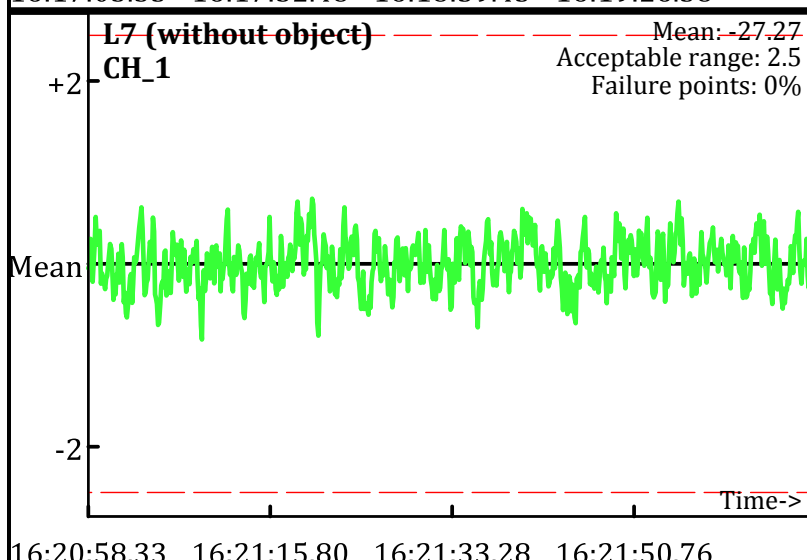Operator: BG & BS
Date: 7/30/2009

L5 (without object) CH_1 — Mean: -27.52, Acceptable range: 2.5, Failure points: 0%

L5 (without object) CH_2 — Mean: -0.71, Acceptable range: 2.5, Failure points: 0%

L6 (with object) CH_1 — Mean: 194.76, Acceptable range: 2.5, Failure points: 0%

L6 (with object) CH_2 — Mean: 160.75, Acceptable range: 2.5, Failure points: 0%

L7 (without object) CH_1 — Mean: -27.27, Acceptable range: 2.5, Failure points: 0%

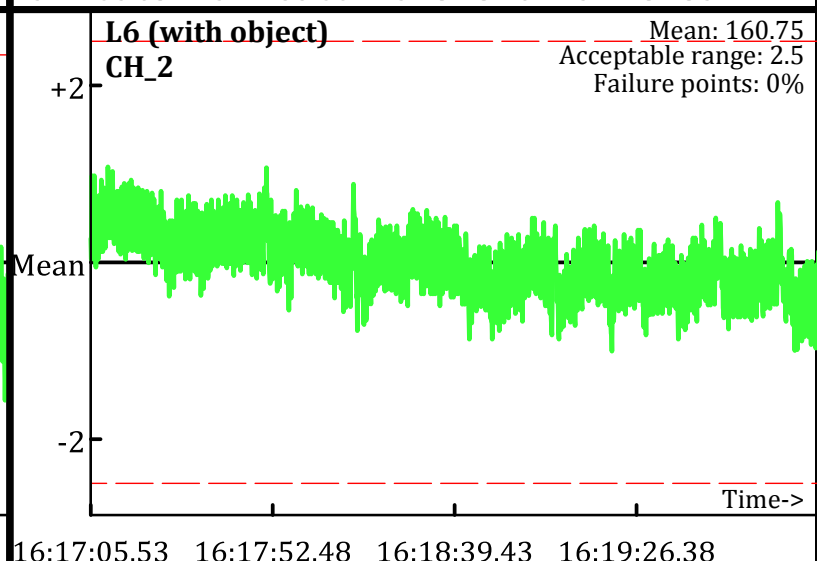L7 (without object) CH_2 — Mean: -0.58, Acceptable range: 2.5, Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
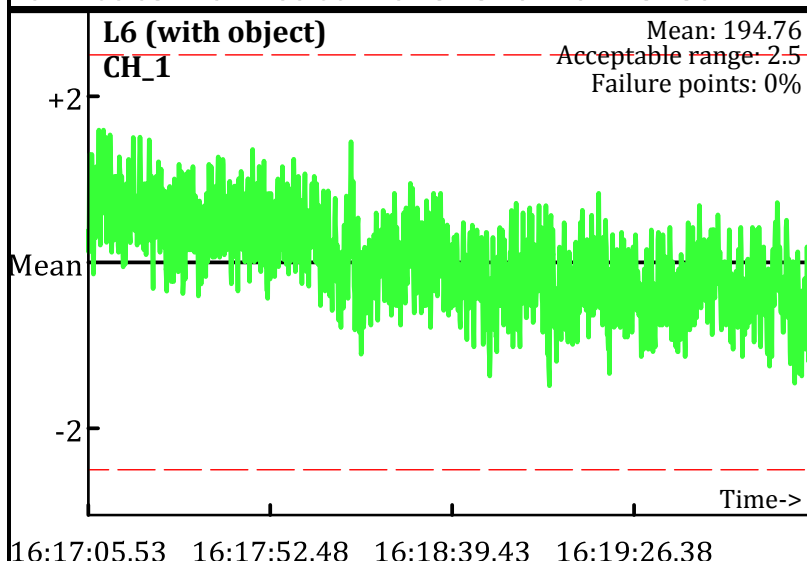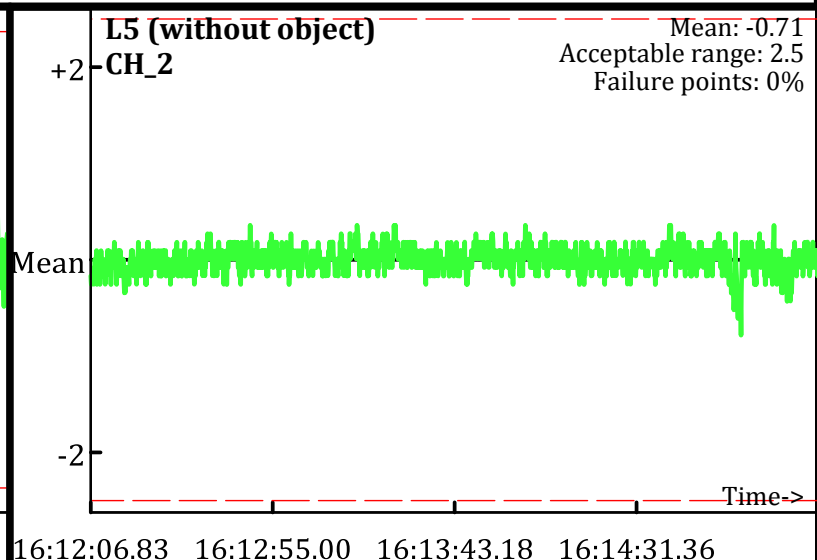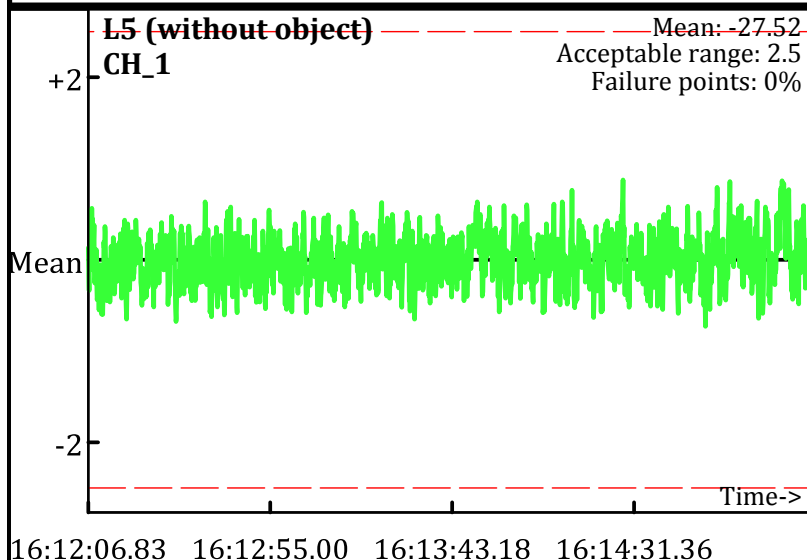– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/30/2009

L5 (without object)
CH_3
Mean: -1.78
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->

16:12:06.83   16:12:55.00   16:13:43.18   16:14:31.36

L5 (without object)
CH_4
Mean: -6.3
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->

16:12:06.83   16:12:55.00   16:13:43.18   16:14:31.36

L6 (with object)
CH_3
Mean: 98.09
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->

16:17:05.53   16:17:52.48   16:18:39.43   16:19:26.38

L6 (with object)
CH_4
Mean: 44.85
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->

16:17:05.53   16:17:52.48   16:18:39.43   16:19:26.38

L7 (without object)
CH_3
Mean: -1.65
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->

16:20:58.33   16:21:15.80   16:21:33.28   16:21:50.76

L7 (without object)
CH_4
Mean: -6.3
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->

16:20:58.33   16:21:15.80   16:21:33.28   16:21:50.76

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
Operator: BG & BS
Date: 7/30/2009
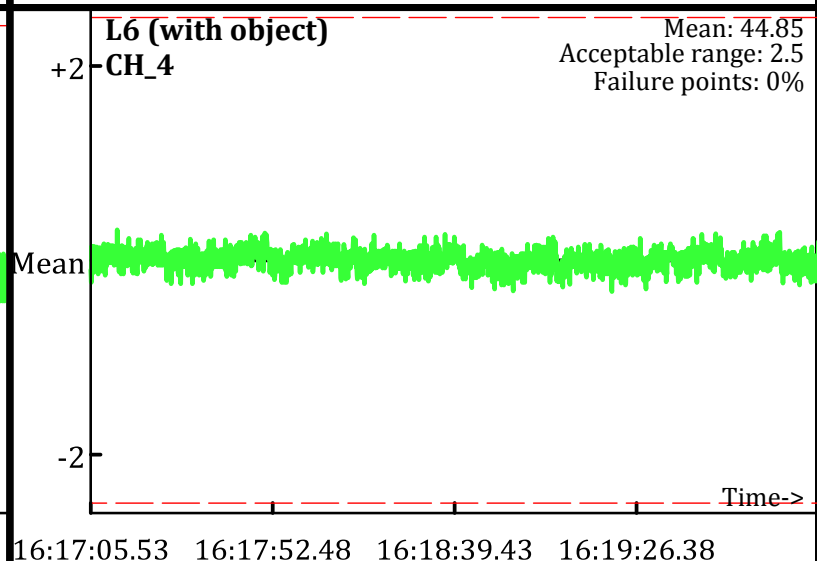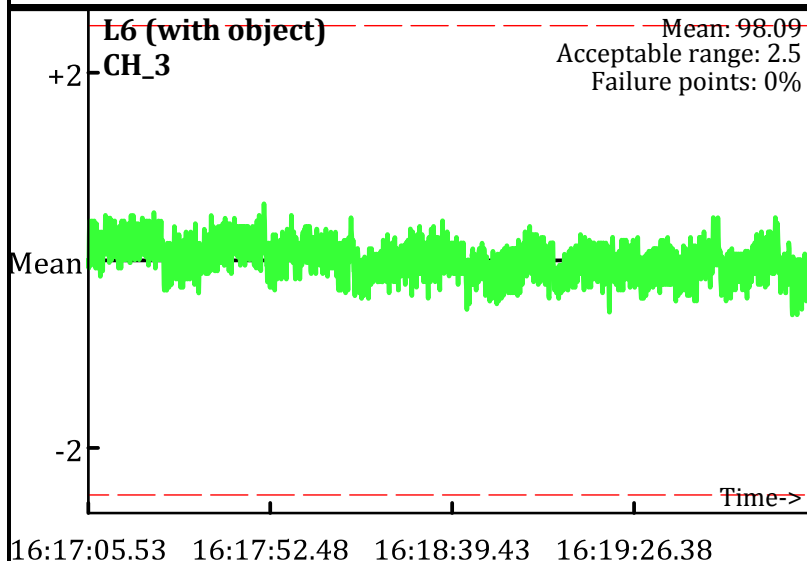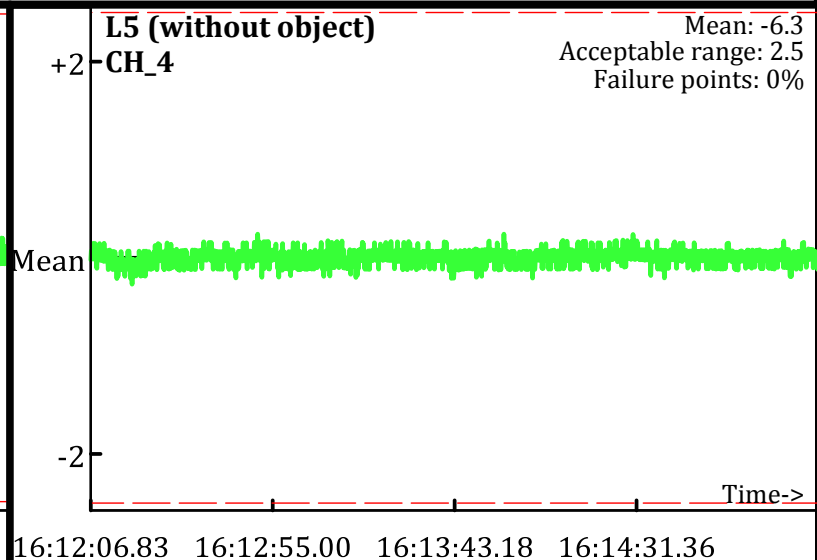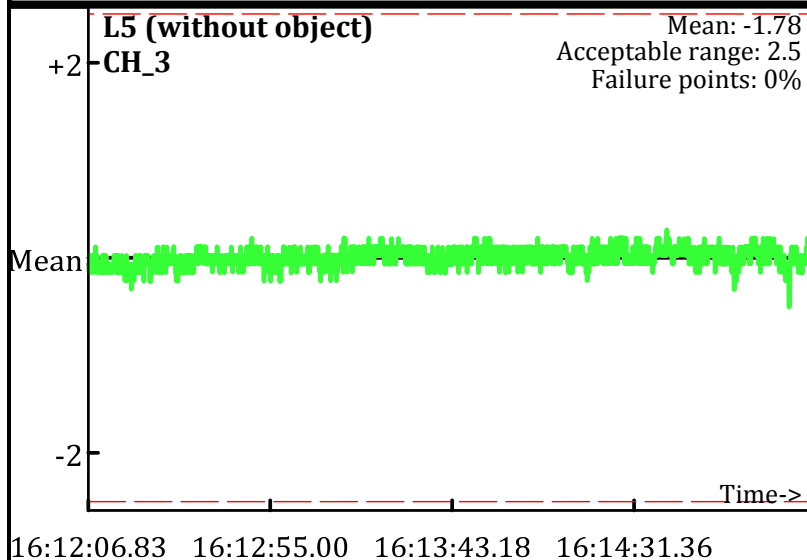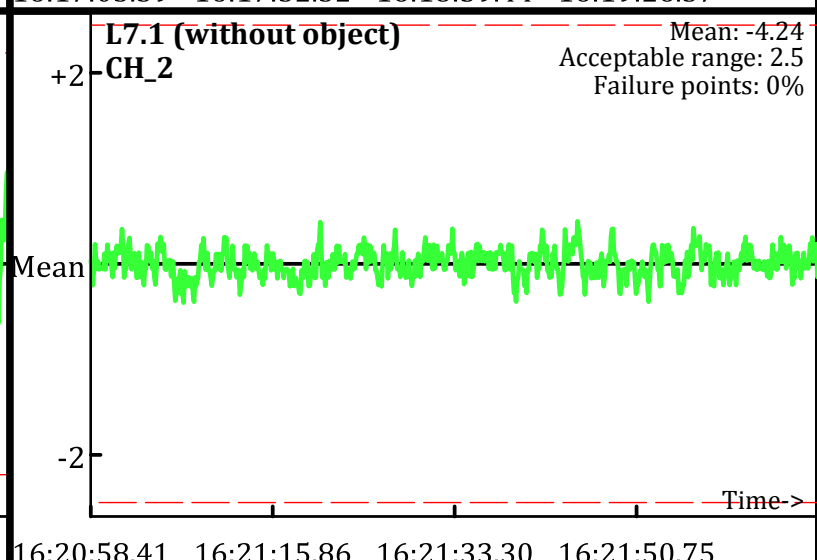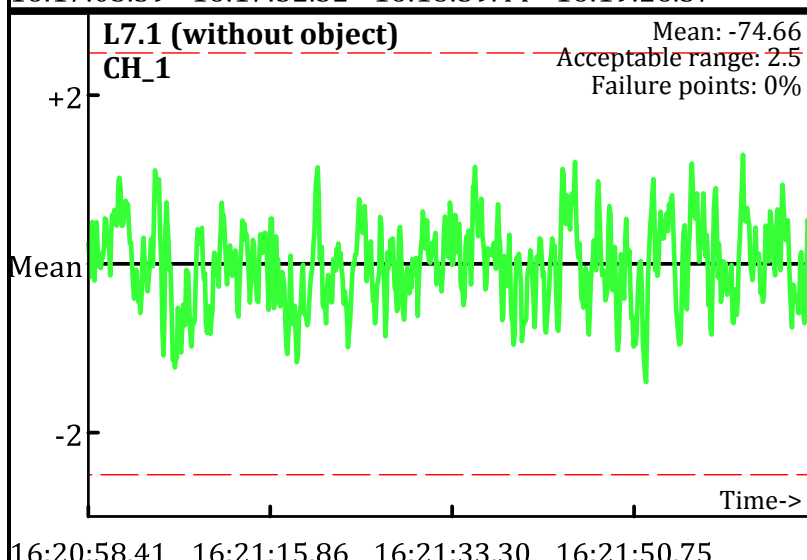
L5.1 (without object)
CH_1

Mean: -74.61
Acceptable range: 2.5
Failure points: 0%

L5.1 (without object)
CH_2

Mean: -4.41
Acceptable range: 2.5
Failure points: 0%

16:12:06.80   16:12:55.00   16:13:43.19   16:14:31.39

L6.1 (with object)
CH_1

Mean: 166.59
Acceptable range: 2.5
Failure points: 0.0532%

L6.1 (with object)
CH_2

Mean: 170.84
Acceptable range: 2.5
Failure points: 0%

16:17:05.59   16:17:52.52   16:18:39.44   16:19:26.37

L7.1 (without object)
CH_1

Mean: -74.66
Acceptable range: 2.5
Failure points: 0%

L7.1 (without object)
CH_2

Mean: -4.24
Acceptable range: 2.5
Failure points: 0%

16:20:58.41   16:21:15.86   16:21:33.30   16:21:50.75

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
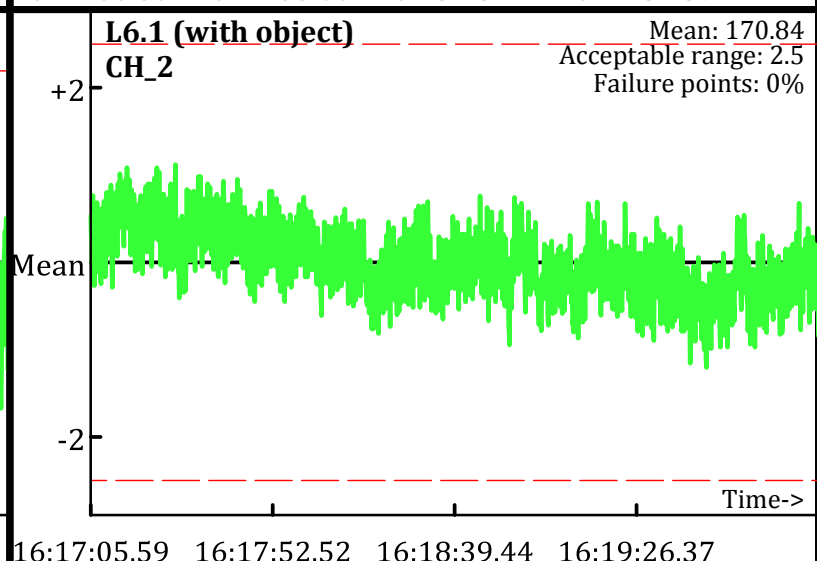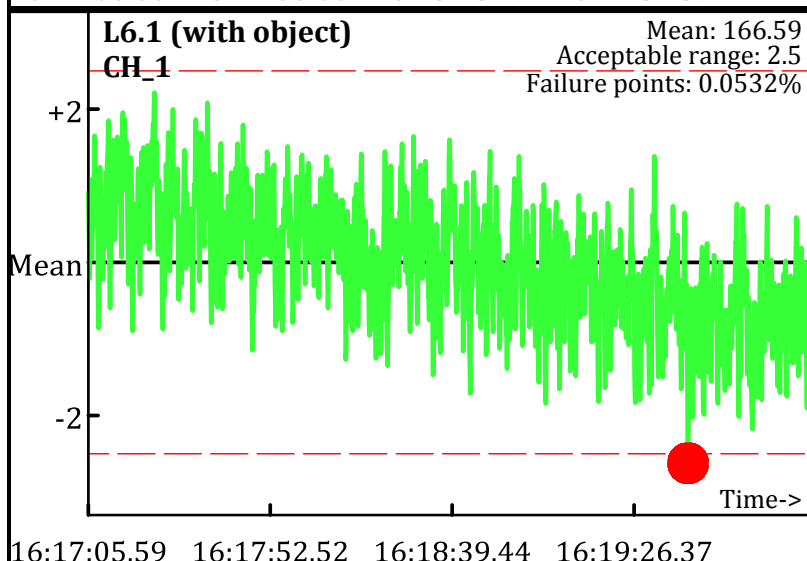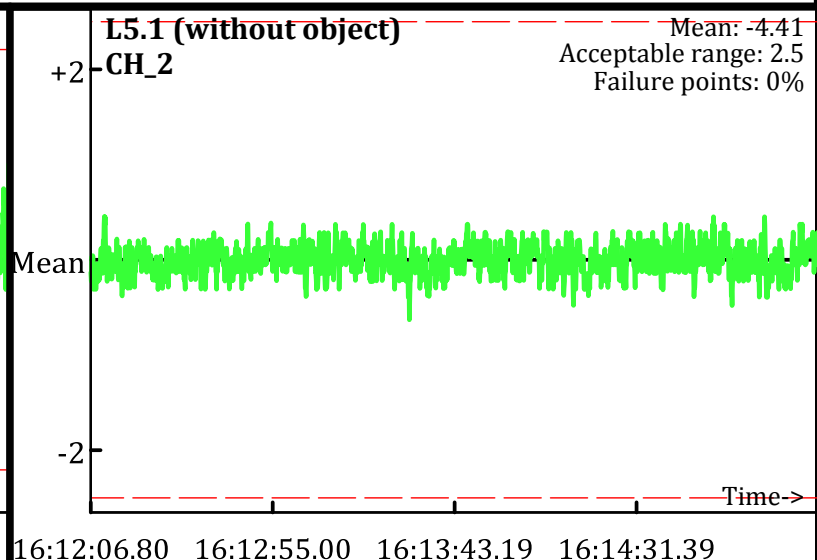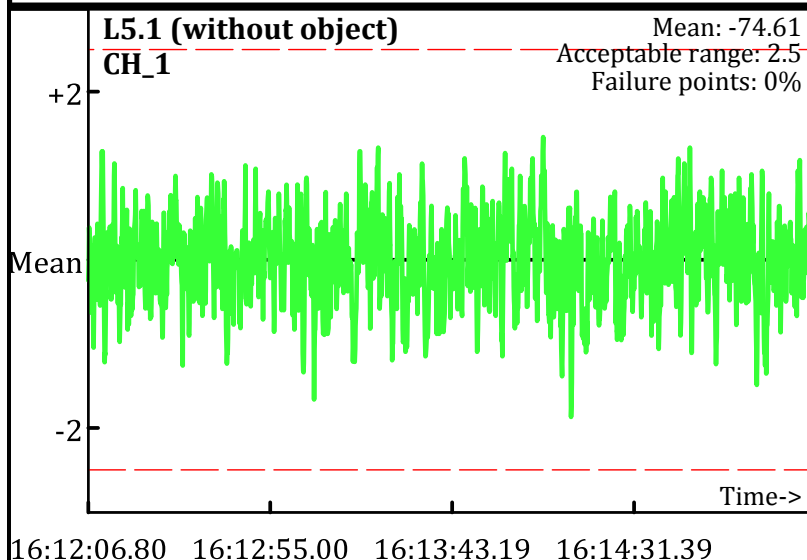Line Name: L5.1 L6.1 L7.1

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/30/2009

L5.1 (without object)
CH_3
Mean: 2.32
Acceptable range: 2.5
Failure points: 0%

16:12:06.80   16:12:55.00   16:13:43.19   16:14:31.39

L5.1 (without object)
CH_4
Mean: -3.01
Acceptable range: 2.5
Failure points: 0%

16:12:06.80   16:12:55.00   16:13:43.19   16:14:31.39

L6.1 (with object)
CH_3
Mean: 109.65
Acceptable range: 2.5
Failure points: 0%

16:17:05.59   16:17:52.52   16:18:39.44   16:19:26.37

L6.1 (with object)
CH_4
Mean: 51.6
Acceptable range: 2.5
Failure points: 0%

16:17:05.59   16:17:52.52   16:18:39.44   16:19:26.37

L7.1 (without object)
CH_3
Mean: 2.5
Acceptable range: 2.5
Failure points: 0%

16:20:58.41   16:21:15.86   16:21:33.30   16:21:50.75

L7.1 (without object)
CH_4
Mean: -2.95
Acceptable range: 2.5
Failure points: 0%

16:20:58.41   16:21:15.86   16:21:33.30   16:21:50.75

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
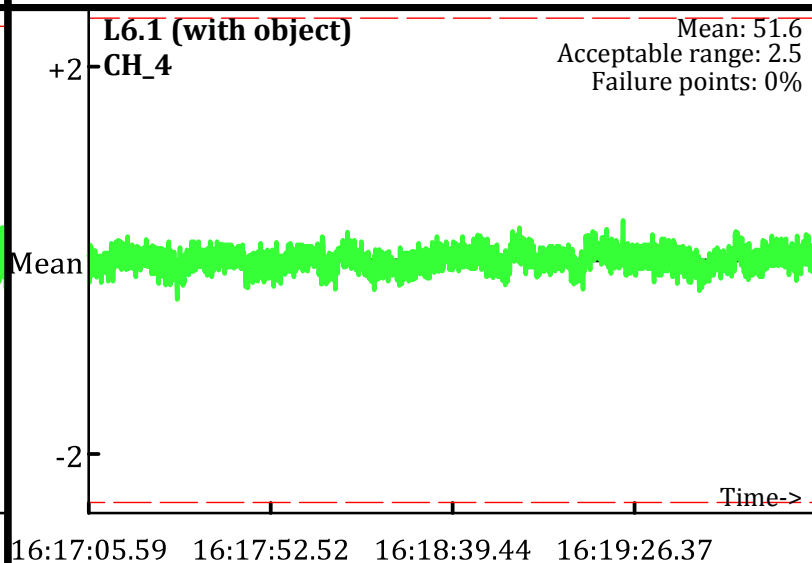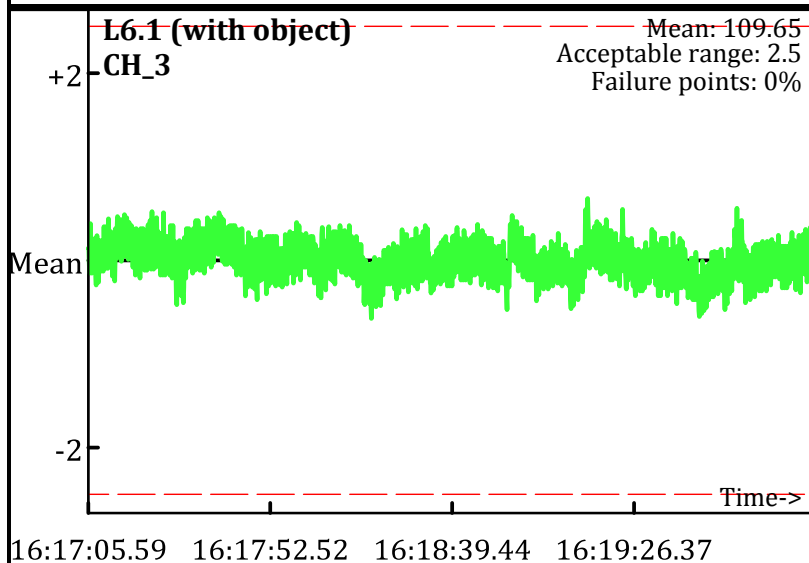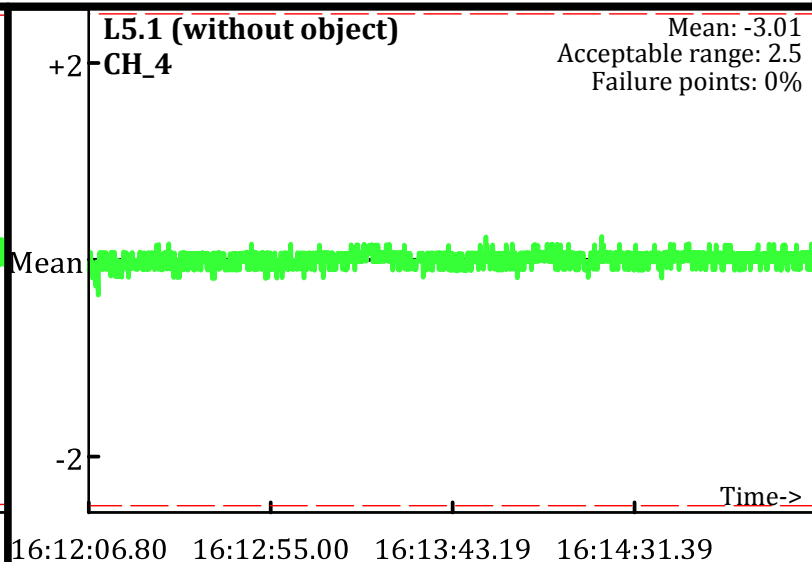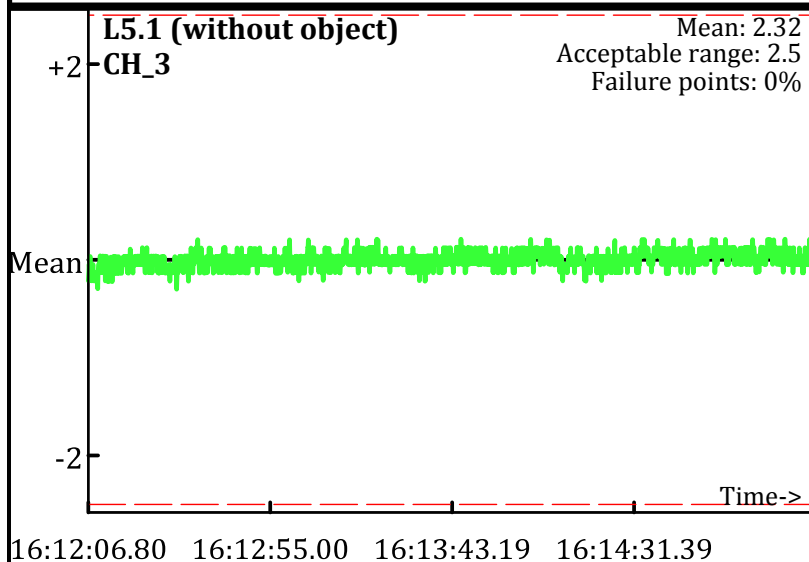Line Name: L5.1 L6.1 L7.1

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

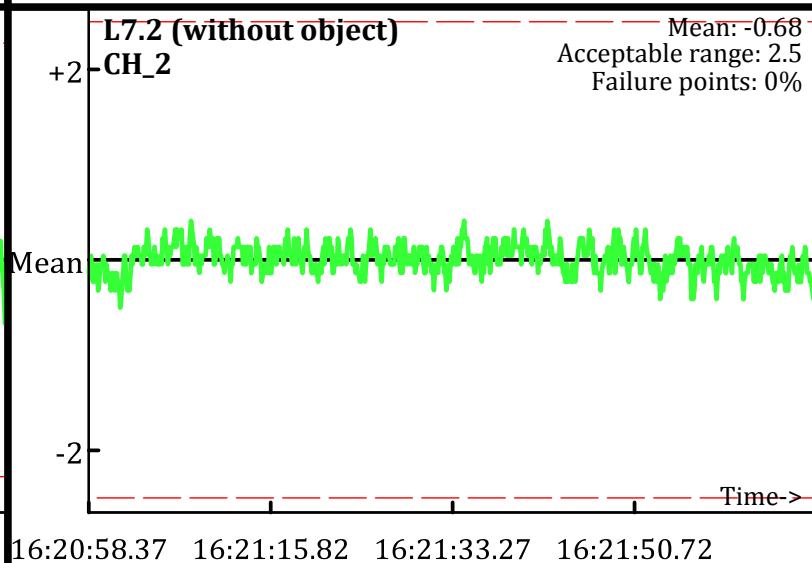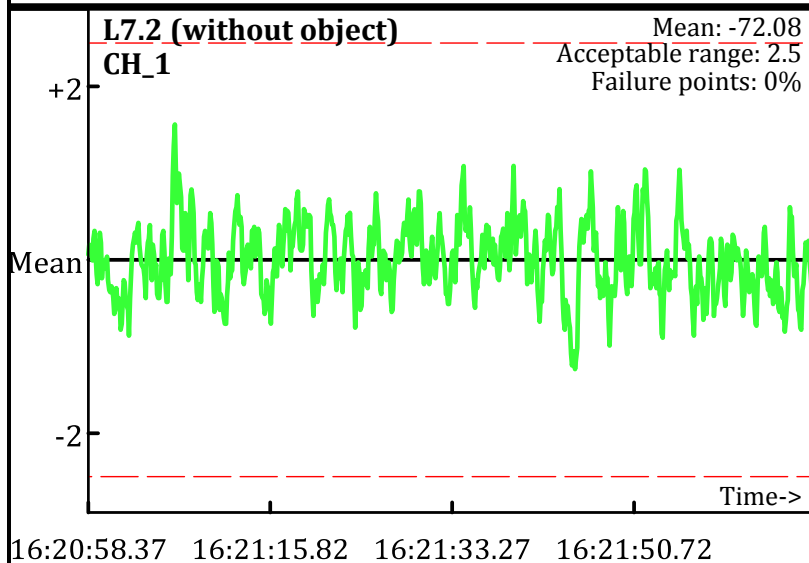PM test
Operator: BG & BS
Date: 7/30/2009

L5.2 (without object)
CH_1
Mean: -71.63
Acceptable range: 2.5
Failure points: 0%

L5.2 (without object)
CH_2
Mean: -0.71
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_1
Mean: 137.11
Acceptable range: 2.5
Failure points: 0%

L6.2 (with object)
CH_2
Mean: 149.22
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_1
Mean: -72.08
Acceptable range: 2.5
Failure points: 0%

L7.2 (without object)
CH_2
Mean: -0.68
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
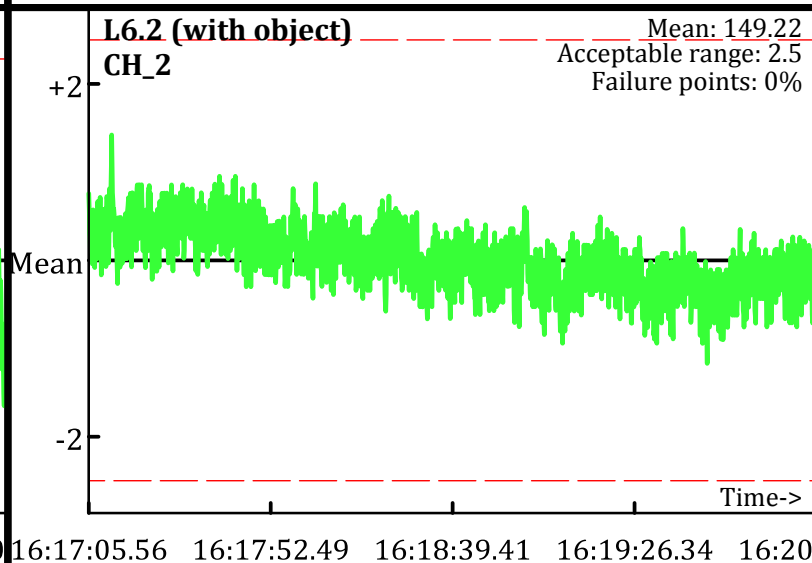Line Name: L5.2 L6.2 L7.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
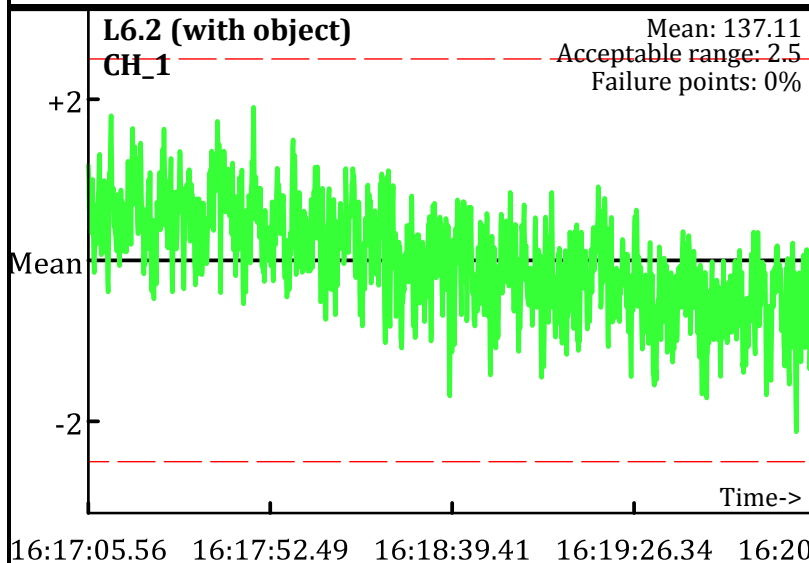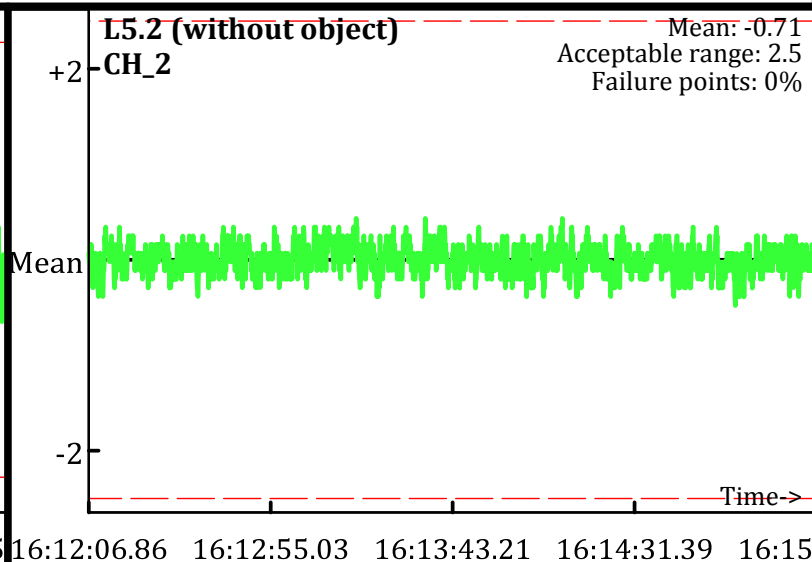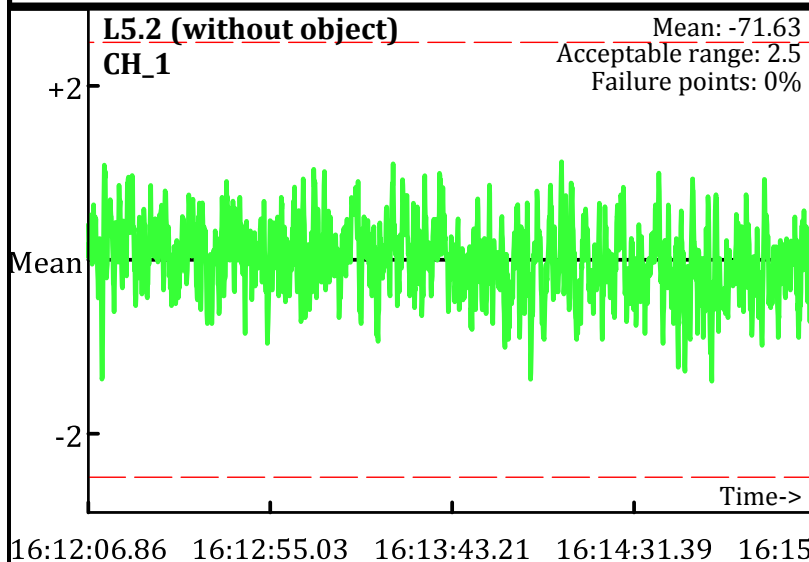– – – Acceptable limits

PM test
Operator: BG & BS
Date: 7/30/2009

L5.2 (without object)
CH_3

Mean: 1.33
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:12:06.86   16:12:55.03   16:13:43.21   16:14:31.39   16:15

L5.2 (without object)
CH_4

Mean: -4.62
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:12:06.86   16:12:55.03   16:13:43.21   16:14:31.39   16:15

L6.2 (with object)
CH_3

Mean: 92.61
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:17:05.56   16:17:52.49   16:18:39.41   16:19:26.34   16:20

L6.2 (with object)
CH_4

Mean: 41.58
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:17:05.56   16:17:52.49   16:18:39.41   16:19:26.34   16:20

L7.2 (without object)
CH_3

Mean: 1.43
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:20:58.37   16:21:15.82   16:21:33.27   16:21:50.72

L7.2 (without object)
CH_4

Mean: -4.53
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

16:20:58.37   16:21:15.82   16:21:33.27   16:21:50.72

Database: C:_QCReports_Ord_Data\073009\QC\073009_TA_QC.gdb
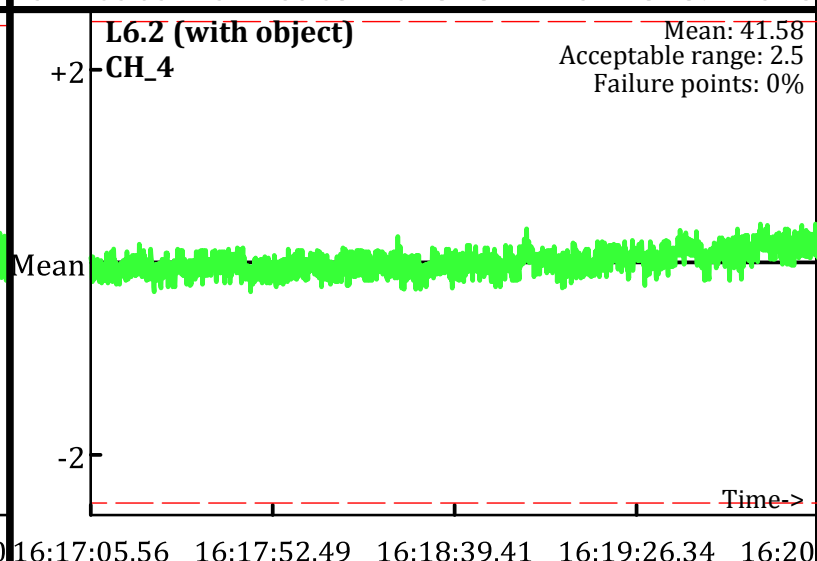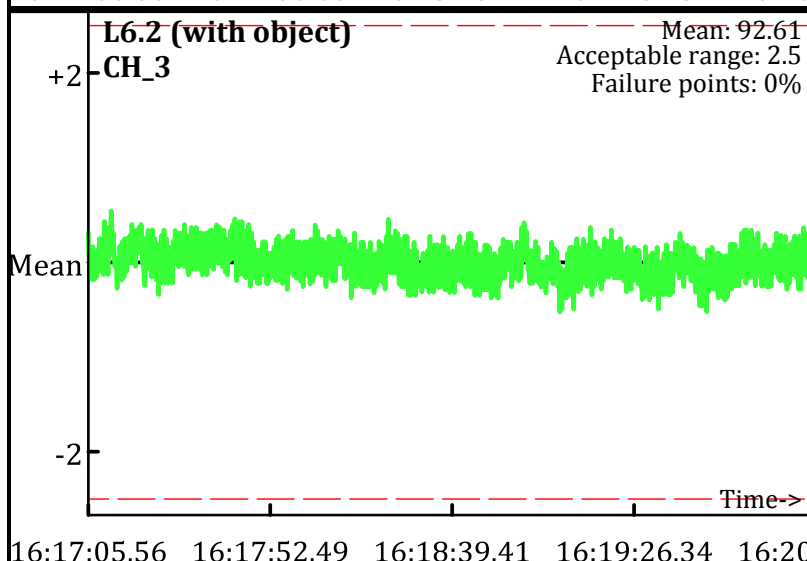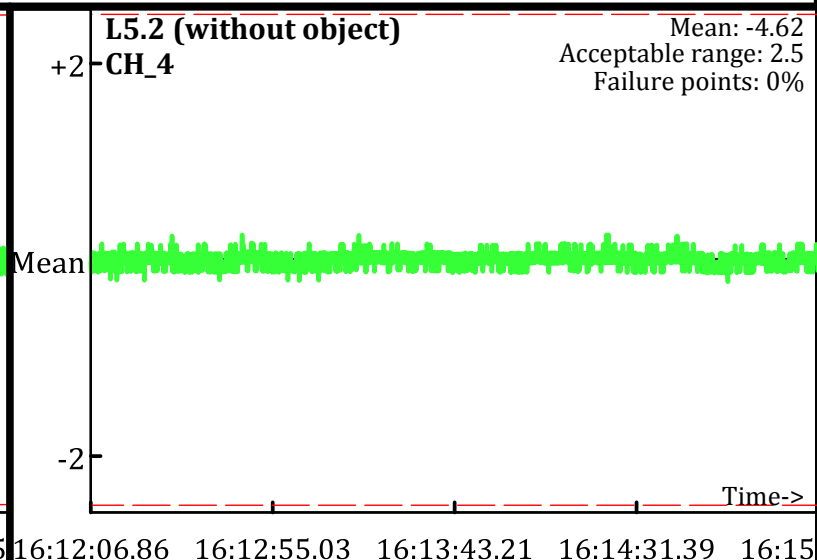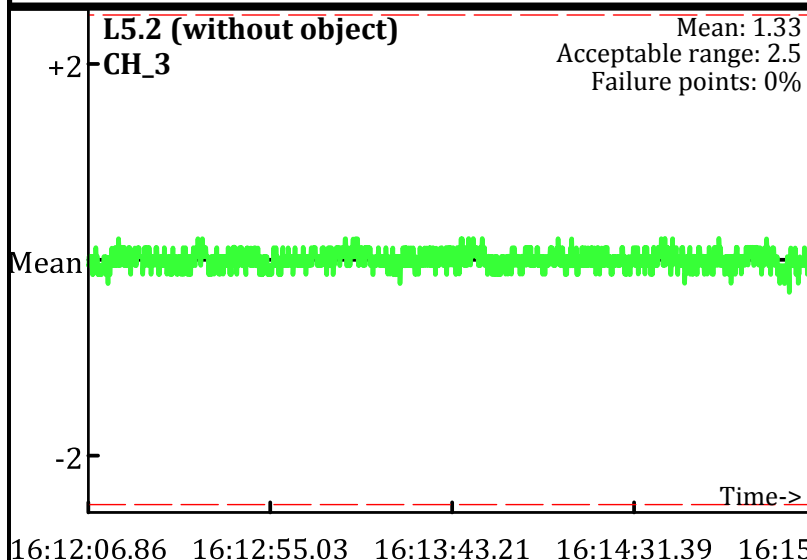Line Name: L5.2 L6.2 L7.2

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

🔴 Outside range
--- Acceptable limits

AM test
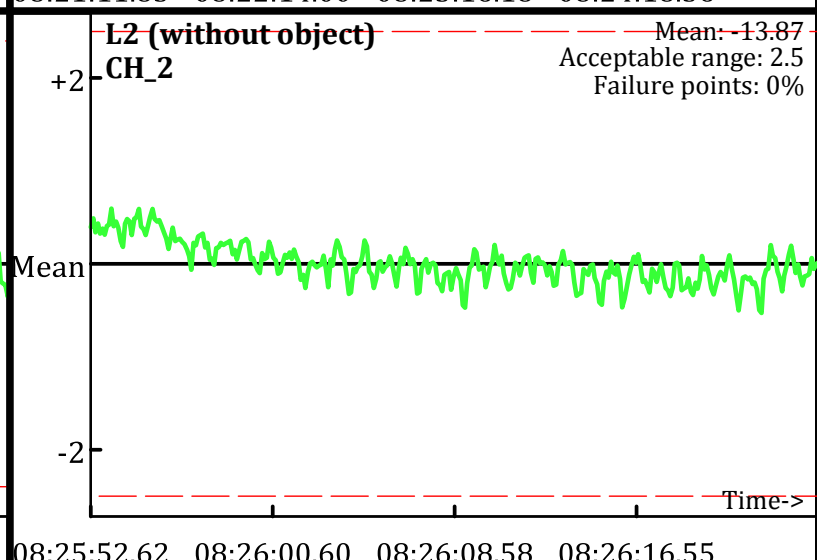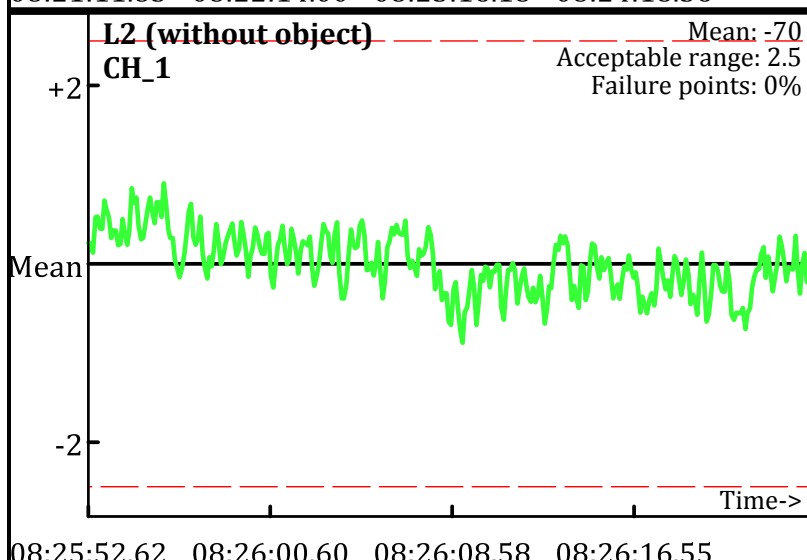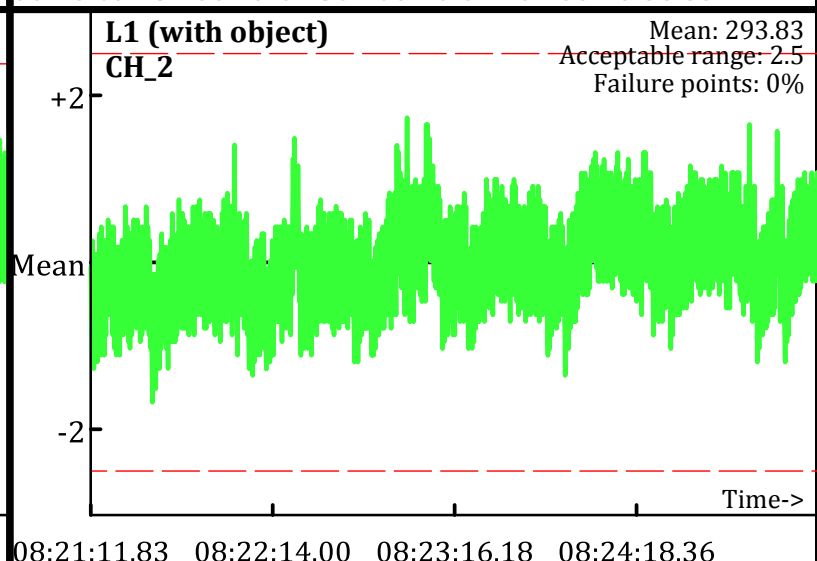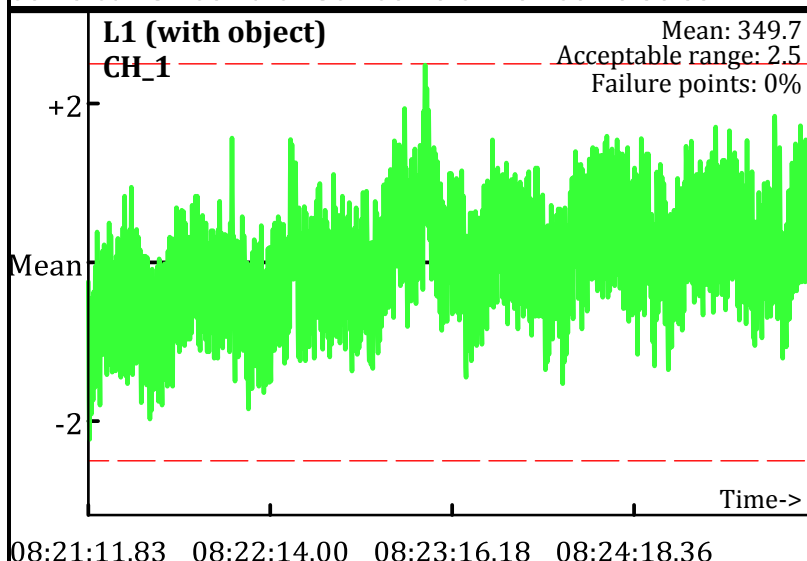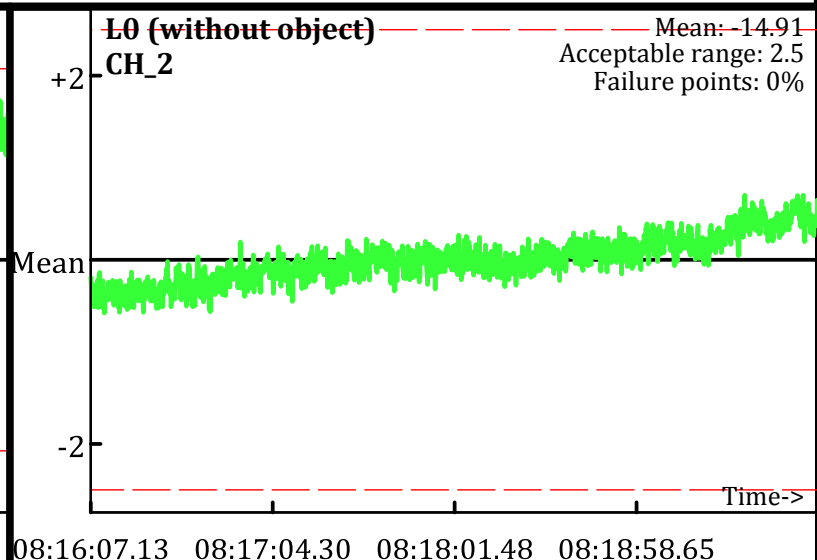Operator: SY & BS
Date: 7/31/2009

L0 (without object)
CH_1
Mean: -73.5
Acceptable range: 2.5
Failure points: 0%

L0 (without object)
CH_2
Mean: -14.91
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_1
Mean: 349.7
Acceptable range: 2.5
Failure points: 0%

L1 (with object)
CH_2
Mean: 293.83
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_1
Mean: -70
Acceptable range: 2.5
Failure points: 0%

L2 (without object)
CH_2
Mean: -13.87
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

● Outside range
– – Acceptable limits

L0 (without object)
CH_3
Mean: -5.3
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:16:07.13   08:17:04.30   08:18:01.48   08:18:58.65

L0 (without object)
CH_4
Mean: -6.52
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:16:07.13   08:17:04.30   08:18:01.48   08:18:58.65

L1 (with object)
CH_3
Mean: 186.76
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:21:11.83   08:22:14.00   08:23:16.18   08:24:18.36

L1 (with object)
CH_4
Mean: 92.27
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:21:11.83   08:22:14.00   08:23:16.18   08:24:18.36

L2 (without object)
CH_3
Mean: -5.02
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:25:52.62   08:26:00.60   08:26:08.58   08:26:16.55

L2 (without object)
CH_4
Mean: -6.42
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

08:25:52.62   08:26:00.60   08:26:08.58   08:26:16.55

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L0 L1 L2

Page: 2

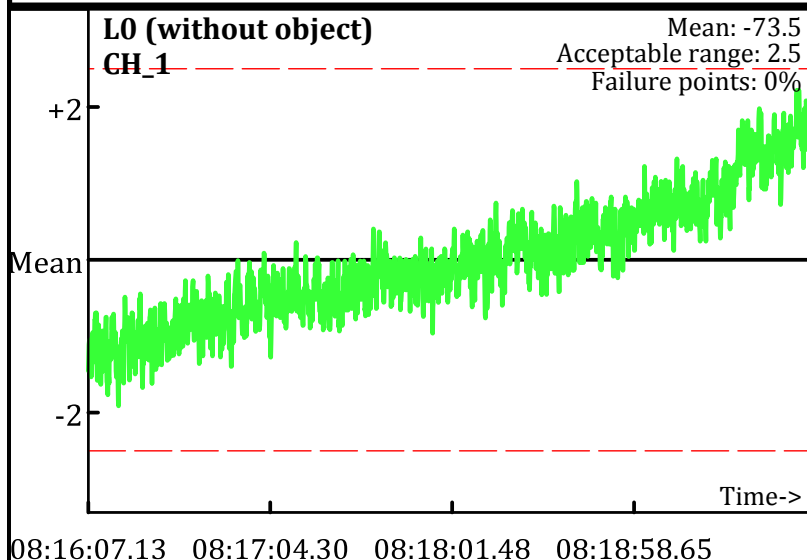# Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: SY & BS
Date: 7/31/2009
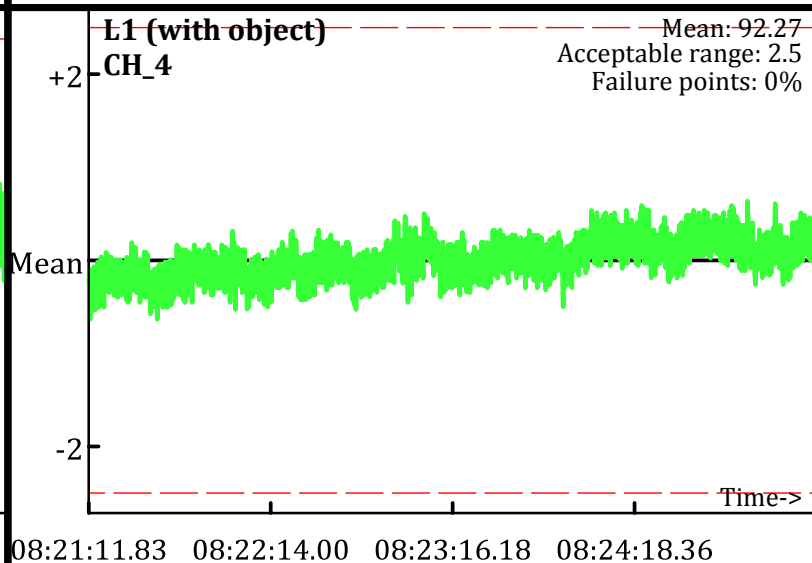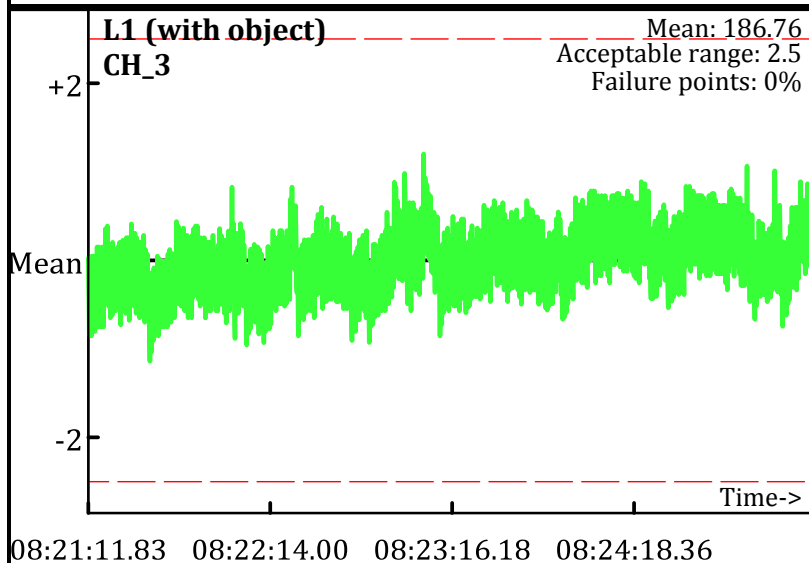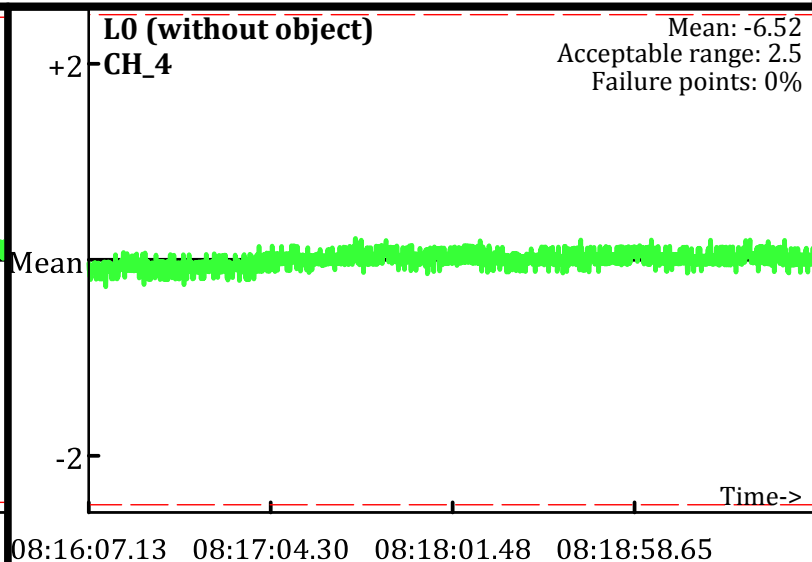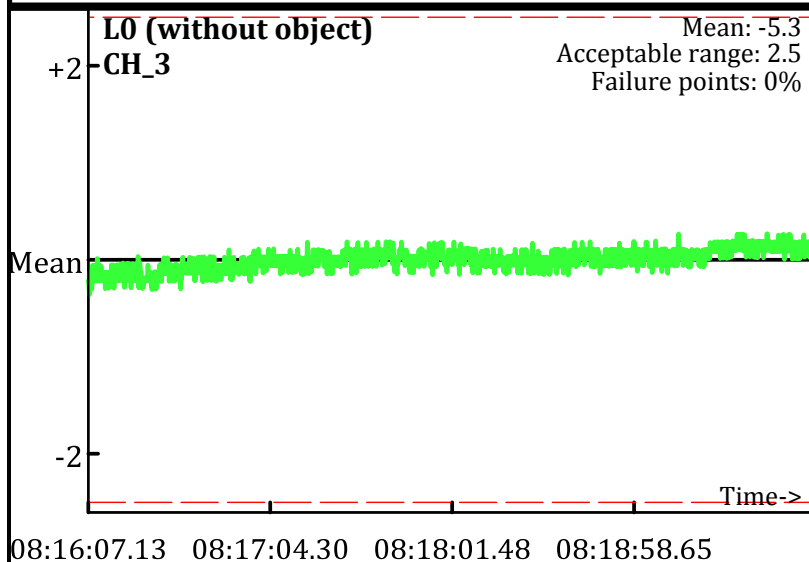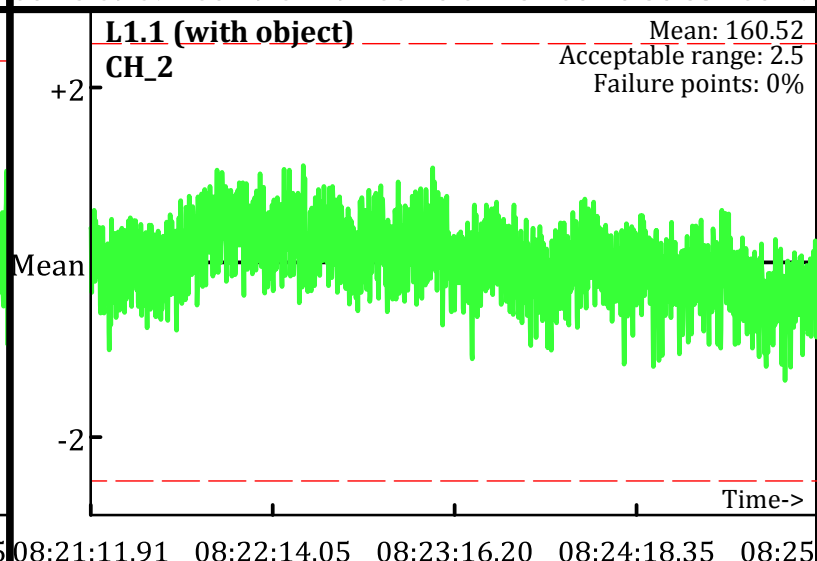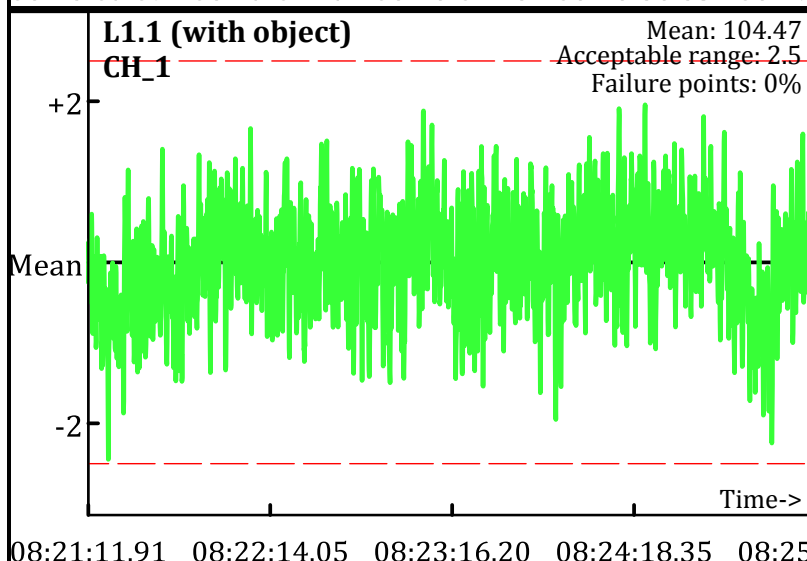
L0.1 (without object)
CH_1
Mean: -143.66
Acceptable range: 2.5
Failure points: 0.0437%

L0.1 (without object)
CH_2
Mean: -18.99
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_1
Mean: 104.47
Acceptable range: 2.5
Failure points: 0%

L1.1 (with object)
CH_2
Mean: 160.52
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_1
Mean: -140.69
Acceptable range: 2.5
Failure points: 0%

L2.1 (without object)
CH_2
Mean: -18.79
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L0.1 L1.1 L2.1

Page: 1

Static Calibration Test

🔴 Outside range
— — Acceptable limits

AM test
Operator: SY & BS
Date: 7/31/2009

L0.1 (without object)
CH_3
Mean: 1.07
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
08:16:07.09 08:17:04.27 08:18:01.45 08:18:58.63 08:19

L0.1 (without object)
CH_4
Mean: -2.46
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
08:16:07.09 08:17:04.27 08:18:01.45 08:18:58.63 08:19

L1.1 (with object)
CH_3
Mean: 111.68
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
08:21:11.91 08:22:14.05 08:23:16.20 08:24:18.35 08:25

L1.1 (with object)
CH_4
Mean: 54.14
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
08:21:11.91 08:22:14.05 08:23:16.20 08:24:18.35 08:25

L2.1 (without object)
CH_3
Mean: 1.09
Acceptable range: 2.5
Failure points: 0%
+2
Mean
-2
Time->
08:25:52.61 08:26:00.58 08:26:08.55 08:26:16.53 08:26

L2.1 (without object)
CH_4
Mean: -2.46
Acceptable range: 2.5
Failure points: 0%
+2
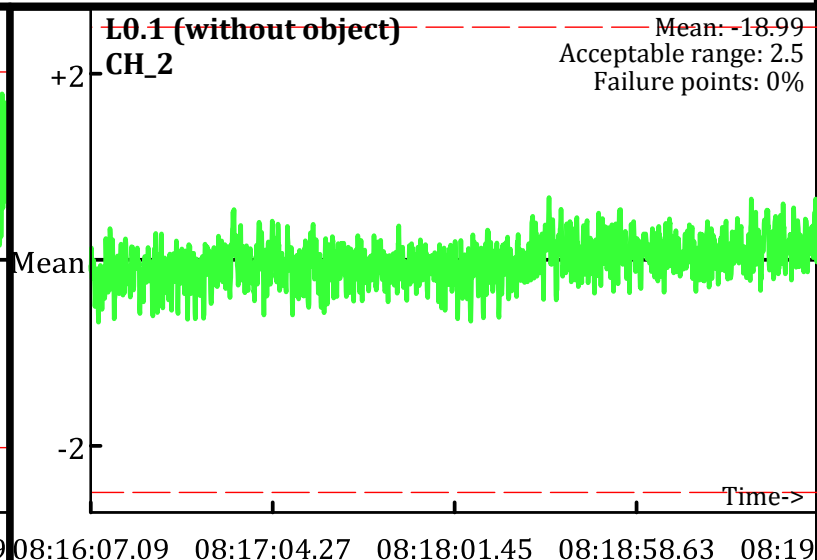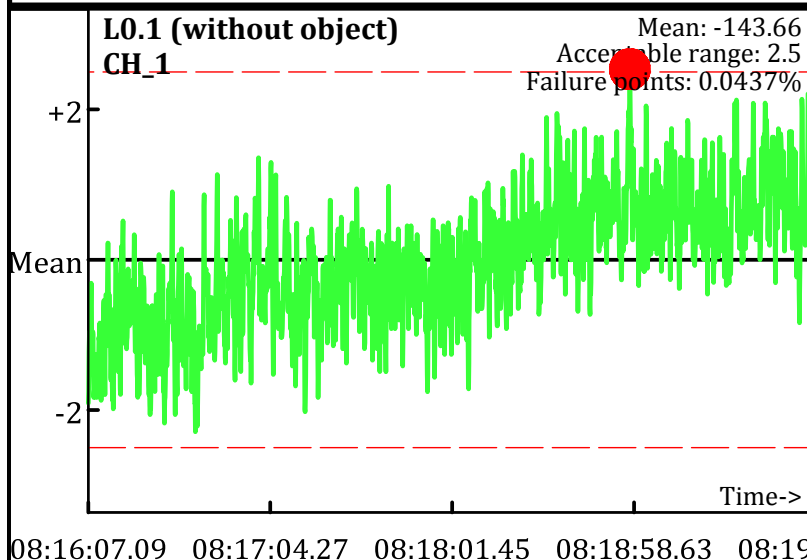Mean
-2
Time->
08:25:52.61 08:26:00.58 08:26:08.55 08:26:16.53 08:26

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
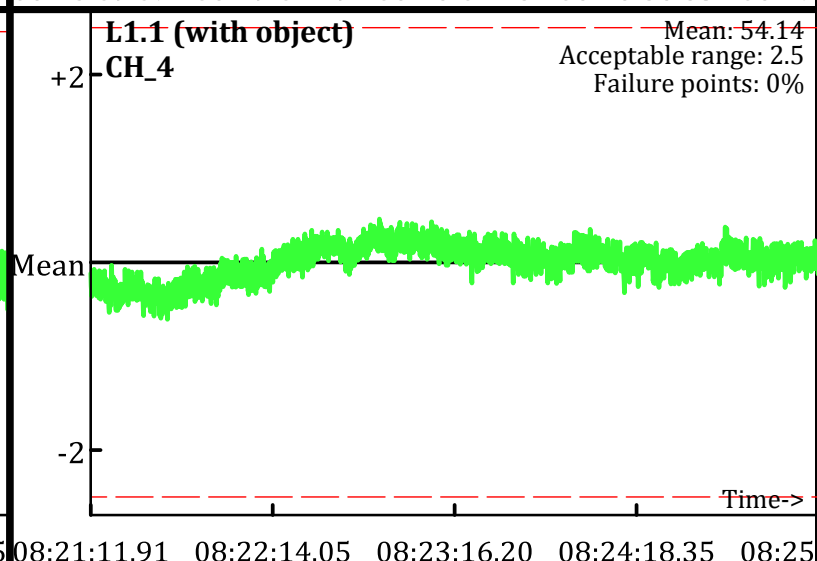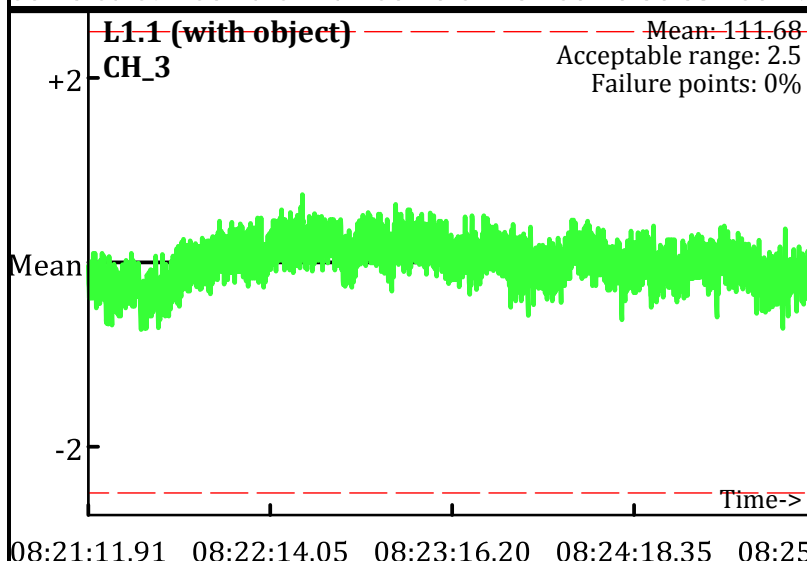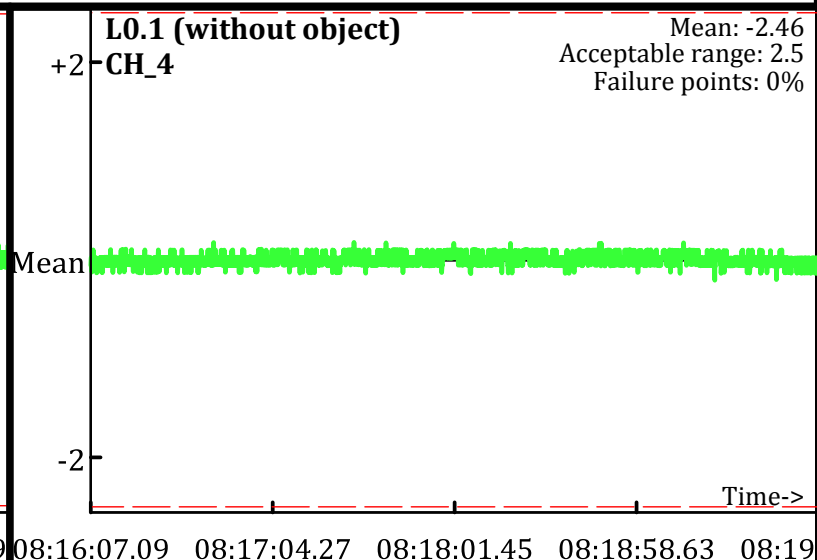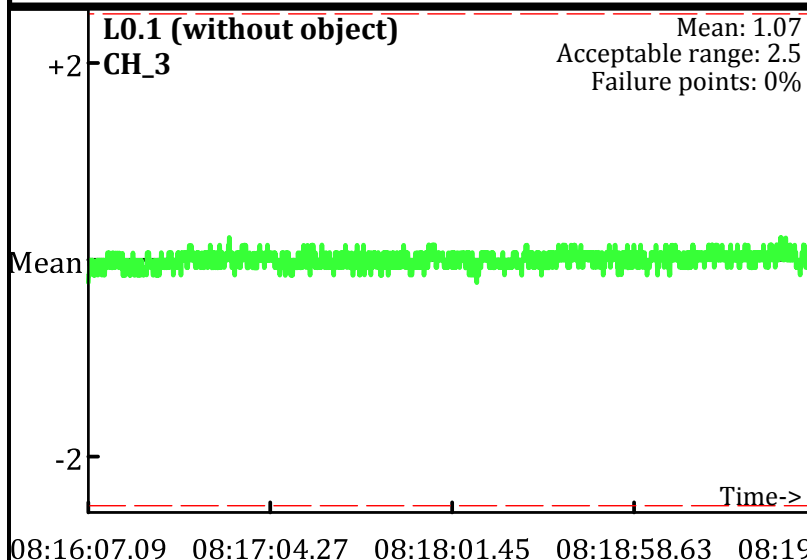Grid/Location: QC Area

● Outside range
--- Acceptable limits

L0.2 (without object)
CH_1
Mean: -136.61
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_2
Mean: -12.99
Acceptable range: 2.5
Failure points: 0%

08:16:07.19   08:17:04.36   08:18:01.53   08:18:58.70
08:16:07.19   08:17:04.36   08:18:01.53   08:18:58.70

L1.2 (with object)
CH_1
Mean: 184.78
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_2
Mean: 217.82
Acceptable range: 2.5
Failure points: 0%

08:21:11.87   08:22:14.05   08:23:16.23   08:24:18.40
08:21:11.87   08:22:14.05   08:23:16.23   08:24:18.40

L2.2 (without object)
CH_1
Mean: -135.3
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_2
Mean: -13.6
Acceptable range: 2.5
Failure points: 0%

08:25:52.58   08:26:00.55   08:26:08.52   08:26:16.50
08:25:52.58   08:26:00.55   08:26:08.52   08:26:16.50

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L0.2 L1.2 L2.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
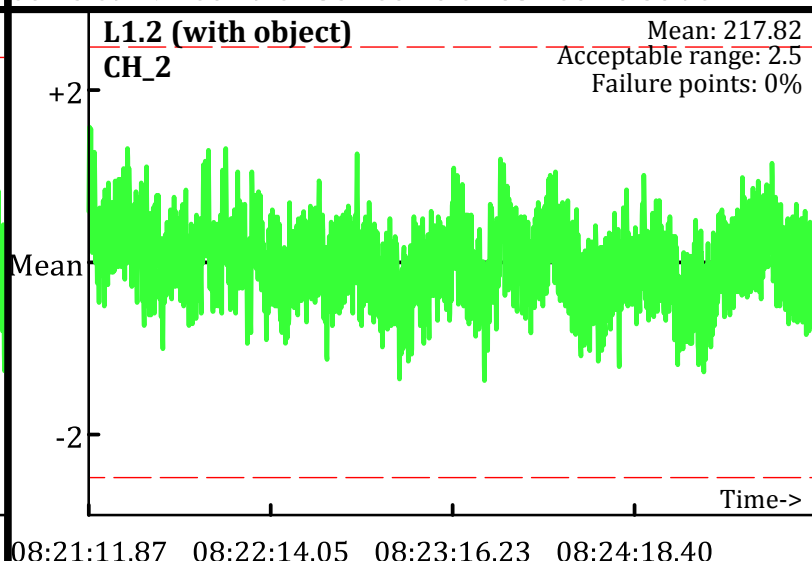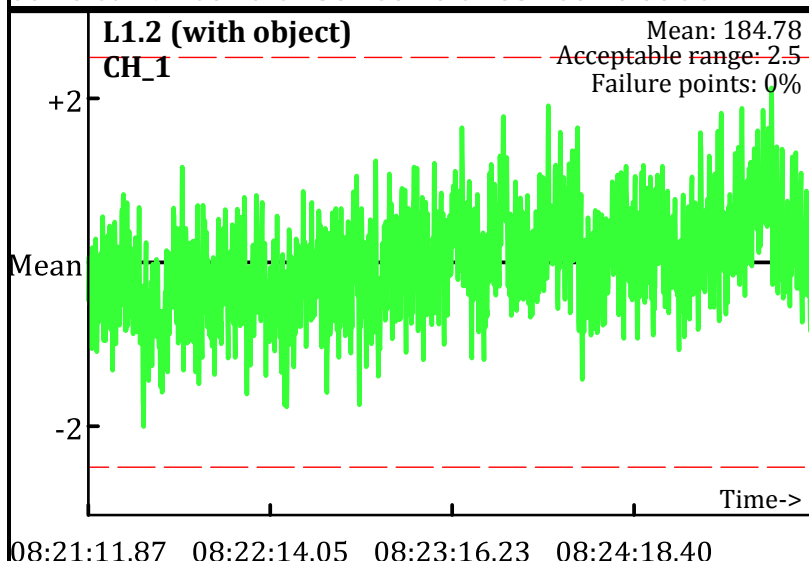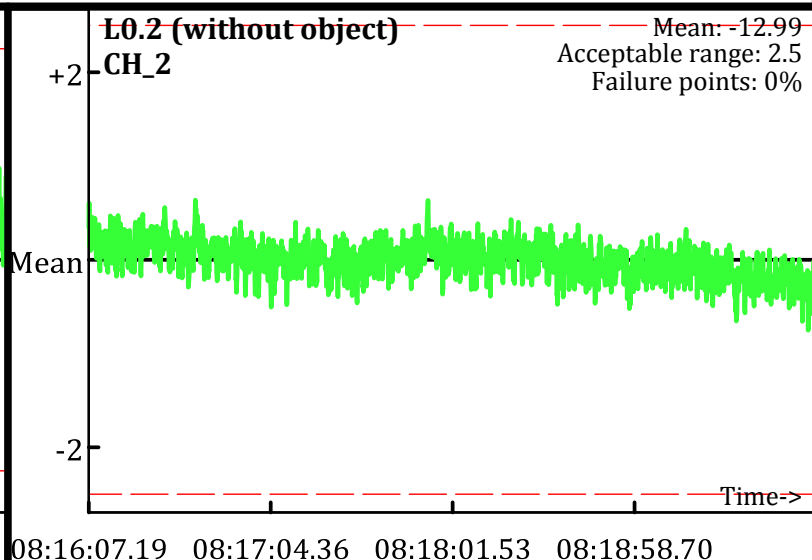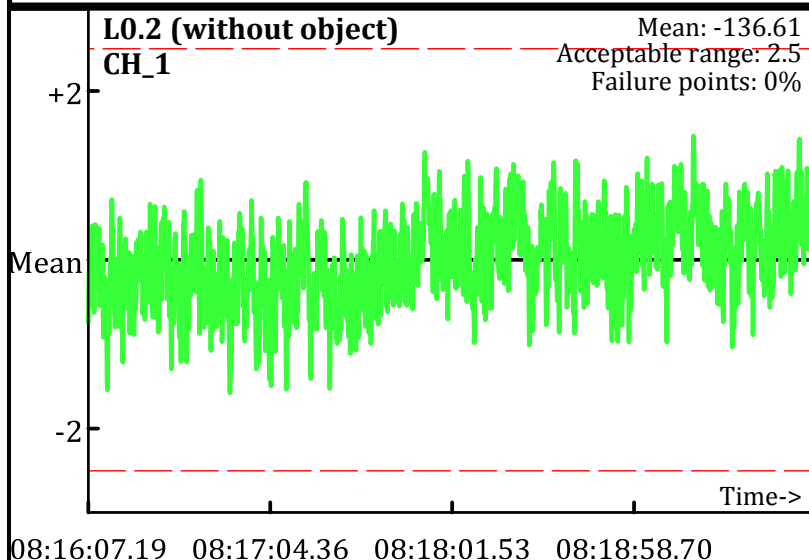Grid/Location: QC Area

● Outside range
– – – Acceptable limits

AM test
Operator: SY & BS
Date: 7/31/2009

L0.2 (without object)
CH_3
Mean: 0.97
Acceptable range: 2.5
Failure points: 0%

L0.2 (without object)
CH_4
Mean: -3.75
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_3
Mean: 143.13
Acceptable range: 2.5
Failure points: 0%

L1.2 (with object)
CH_4
Mean: 69.14
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_3
Mean: 0.68
Acceptable range: 2.5
Failure points: 0%

L2.2 (without object)
CH_4
Mean: -3.77
Acceptable range: 2.5
Failure points: 0%

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
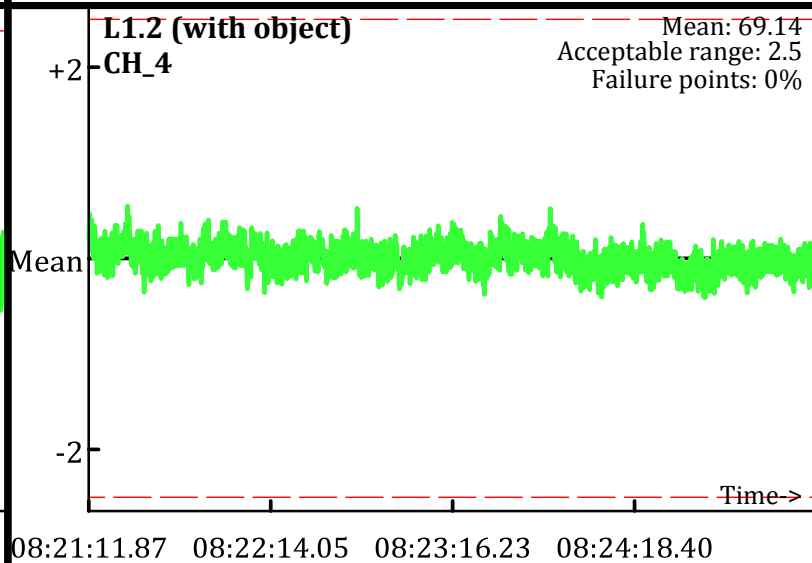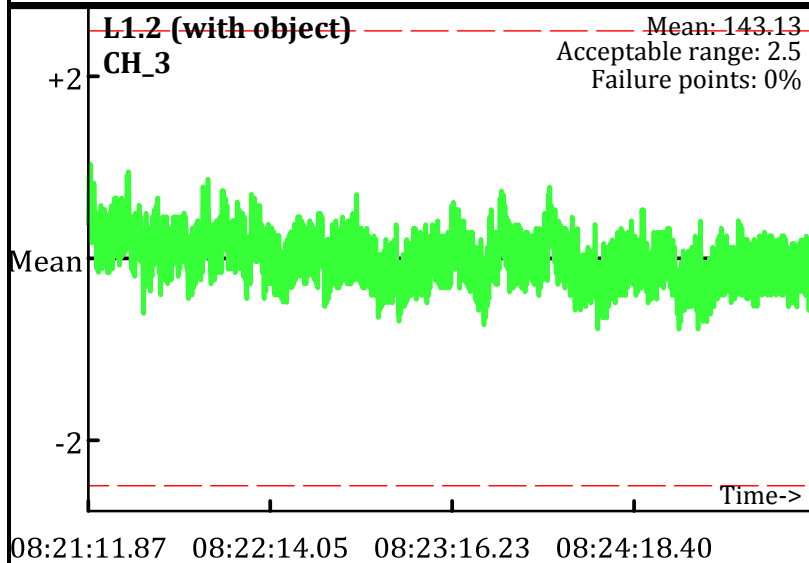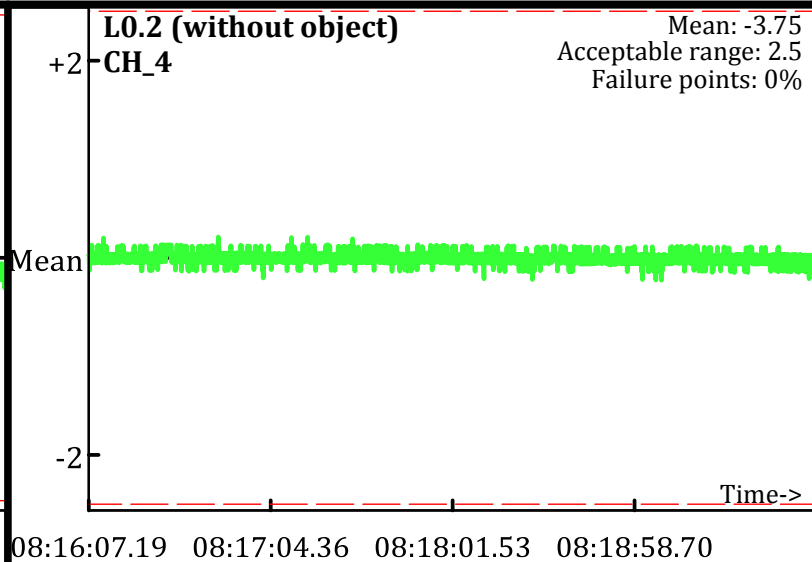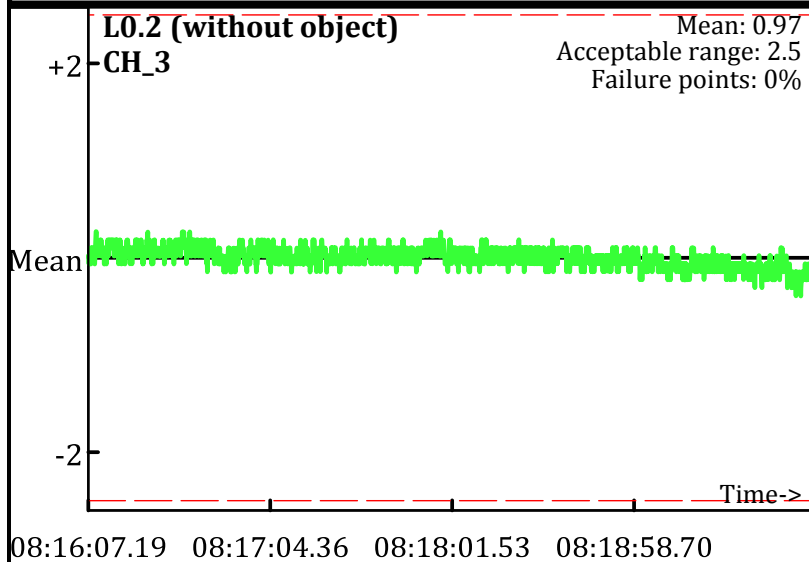Grid/Location: QC Area

● Outside range
- - - Acceptable limits

PM test
Operator: SY & BS
Date: 7/31/2009

L6 (without object)
CH_1
Mean: -25.82
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

14:05:40.50   14:06:27.18   14:07:13.86   14:08:00.54   14:08

L6 (without object)
CH_2
Mean: 0.49
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

14:05:40.50   14:06:27.18   14:07:13.86   14:08:00.54   14:08

L7 (with object)
CH_1
Mean: 145.66
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

14:09:42.22   14:10:29.66   14:11:17.11   14:12:04.55   14:12

L7 (with object)
CH_2
Mean: 123.82
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

14:09:42.22   14:10:29.66   14:11:17.11   14:12:04.55   14:12

L8 (without object)
CH_1
Mean: -26.13
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

14:13:20.11   14:13:36.81   14:13:53.51   14:14:10.21   14:14

L8 (without object)
CH_2
Mean: 0.35
Acceptable range: 2.5
Failure points: 0%

+2
Mean
-2

Time->

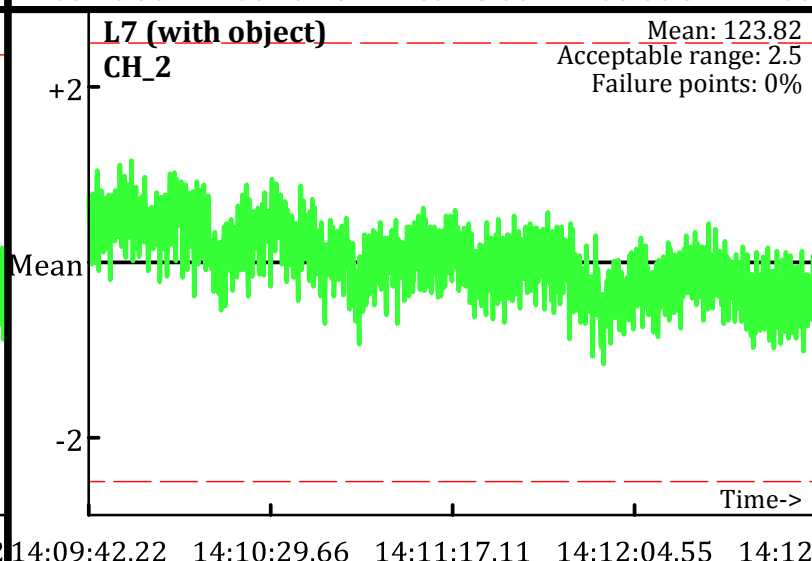14:13:20.11   14:13:36.81   14:13:53.51   14:14:10.21   14:14
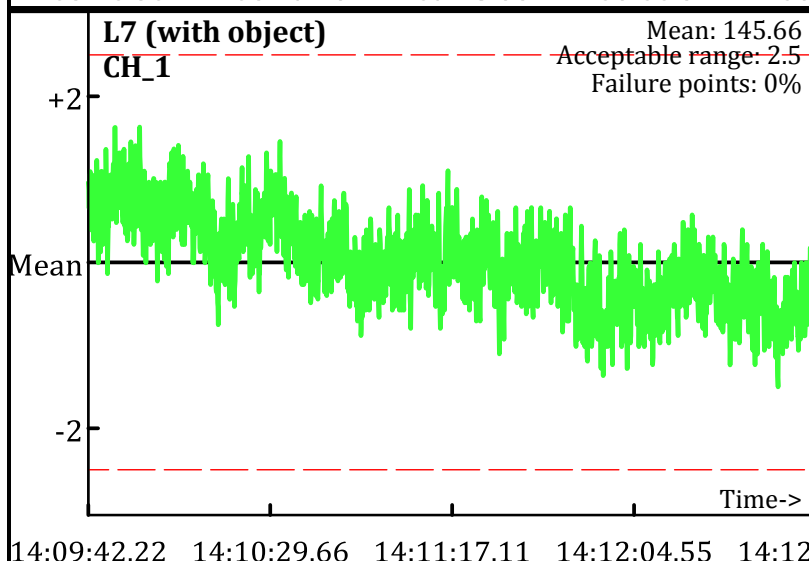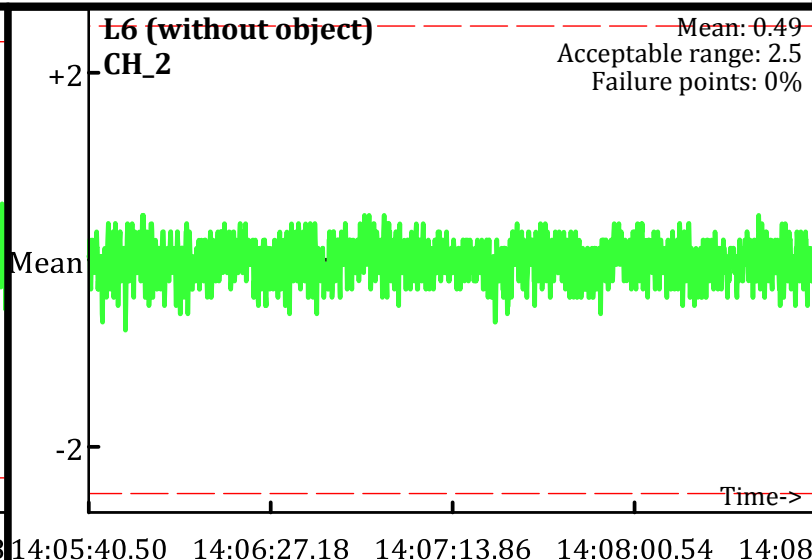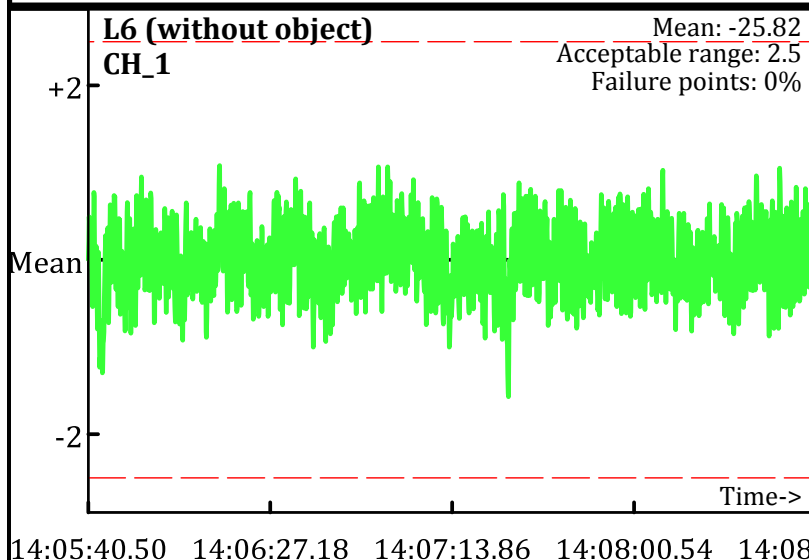
Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: SY & BS
Date: 7/31/2009

L6 (without object)
CH_3
Mean: -1.11
Acceptable range: 2.5
Failure points: 0%

L6 (without object)
CH_4
Mean: -5.94
Acceptable range: 2.5
Failure points: 0%

L7 (with object)
CH_3
Mean: 74.44
Acceptable range: 2.5
Failure points: 0%

L7 (with object)
CH_4
Mean: 32.39
Acceptable range: 2.5
Failure points: 0%

L8 (without object)
CH_3
Mean: -1.15
Acceptable range: 2.5
Failure points: 0%

L8 (without object)
CH_4
Mean: -6.01
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L6 L7 L8

Page: 2

Static Calibration Test

Project: Fort Ord Parker Flats - Develpment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
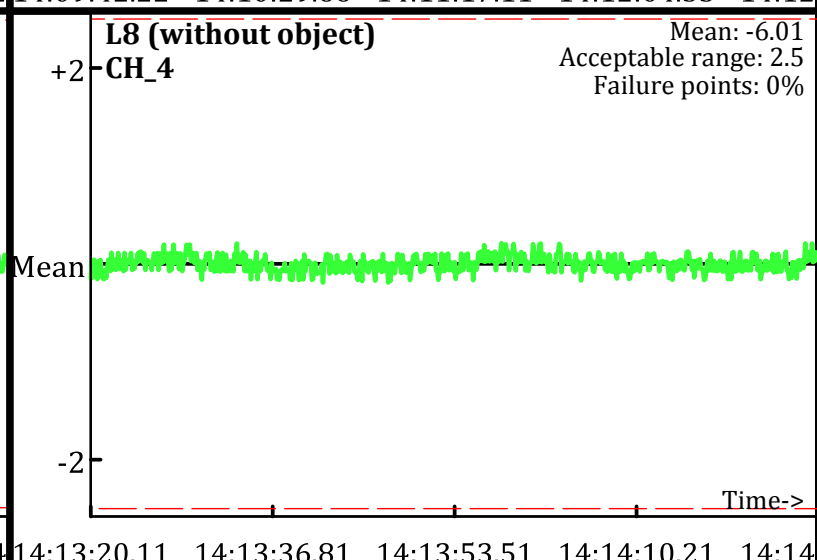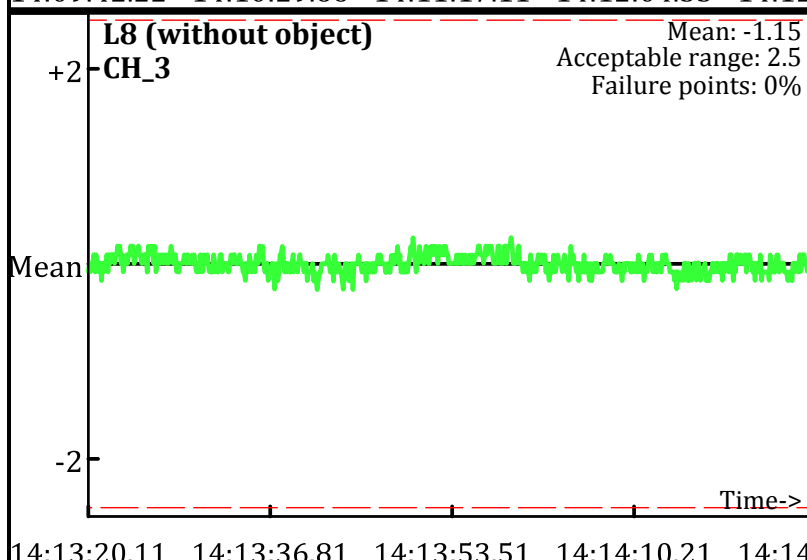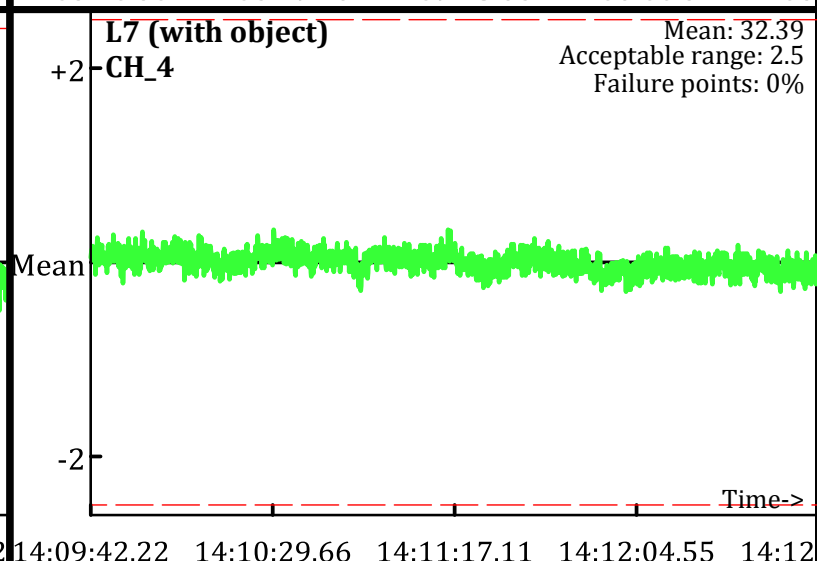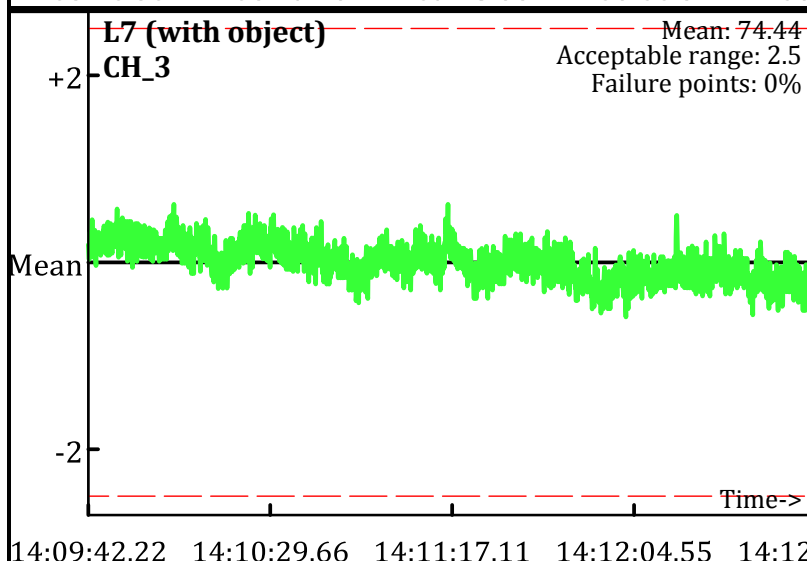Operator: SY & BS
Date: 7/31/2009

L6.1 (without object)
CH_1
Mean: -76.67
Acceptable range: 2.5
Failure points: 0%

L6.1 (without object)
CH_2
Mean: -4.72
Acceptable range: 2.5
Failure points: 0%

14:05:40.47   14:06:27.15   14:07:13.83   14:08:00.51

14:05:40.47   14:06:27.15   14:07:13.83   14:08:00.51

L7.1 (with object)
CH_1
Mean: 150.38
Acceptable range: 2.5
Failure points: 0.0527%

L7.1 (with object)
CH_2
Mean: 159.51
Acceptable range: 2.5
Failure points: 0%

14:09:42.28   14:10:29.71   14:11:17.13   14:12:04.56

14:09:42.28   14:10:29.71   14:11:17.13   14:12:04.56

L8.1 (without object)
CH_1
Mean: -76.8
Acceptable range: 2.5
Failure points: 0%

L8.1 (without object)
CH_2
Mean: -4.7
Acceptable range: 2.5
Failure points: 0%

14:13:20.08   14:13:36.78   14:13:53.48   14:14:10.18   14:14

14:13:20.08   14:13:36.78   14:13:53.48   14:14:10.18   14:14

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L6.1 L7.1 L8.1

Page: 1

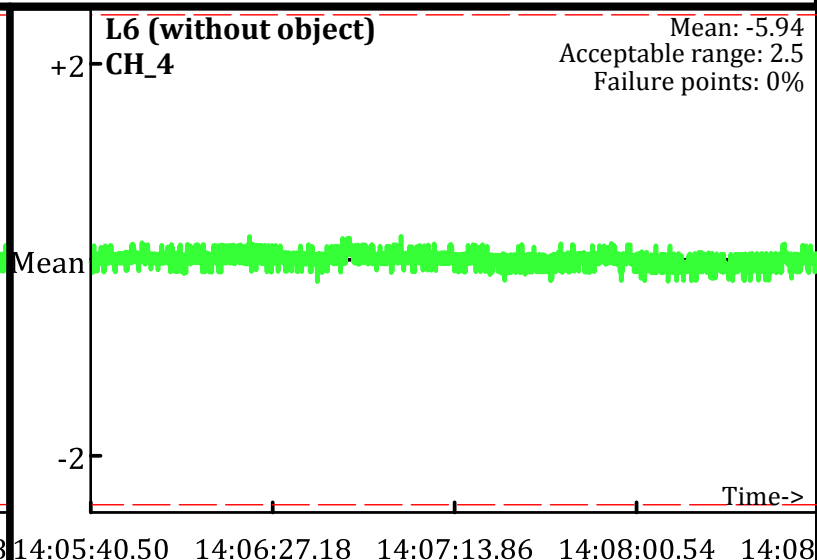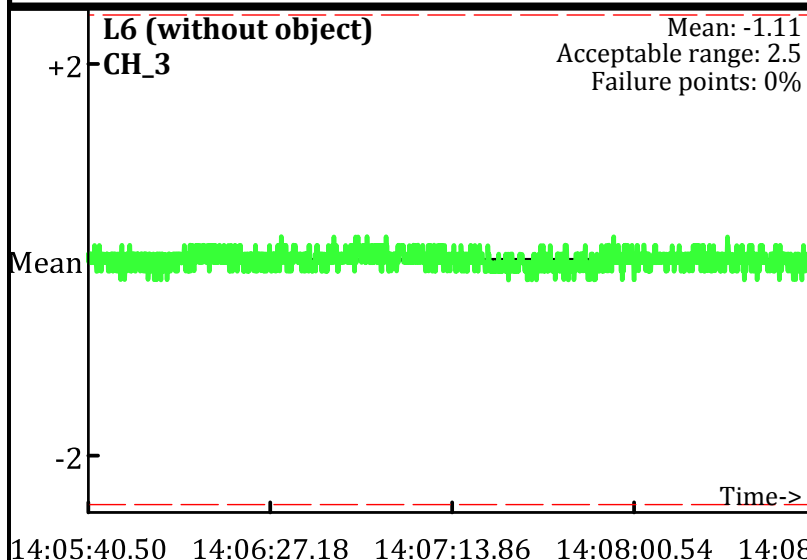# Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
– – – Acceptable limits

PM test
Operator: SY & BS
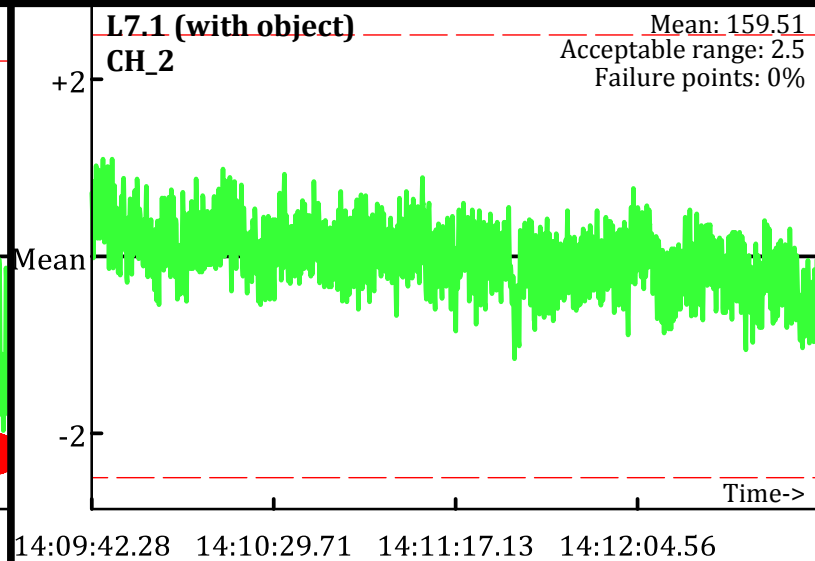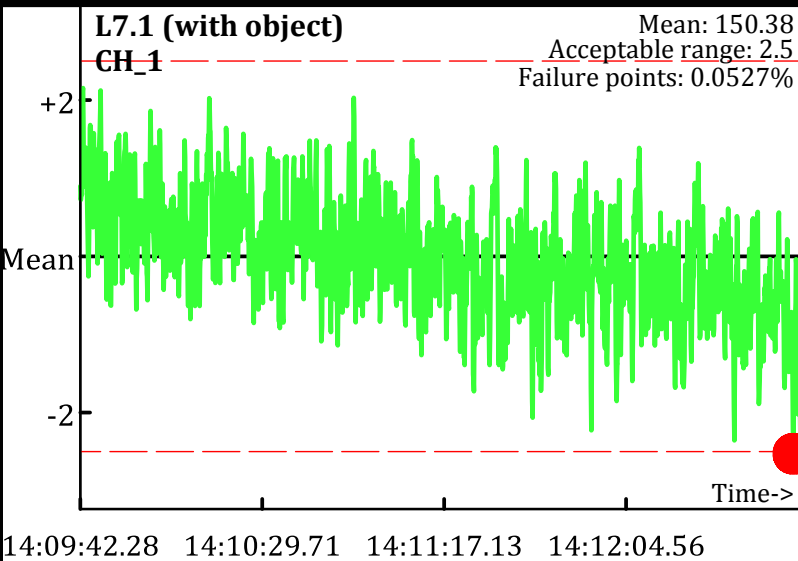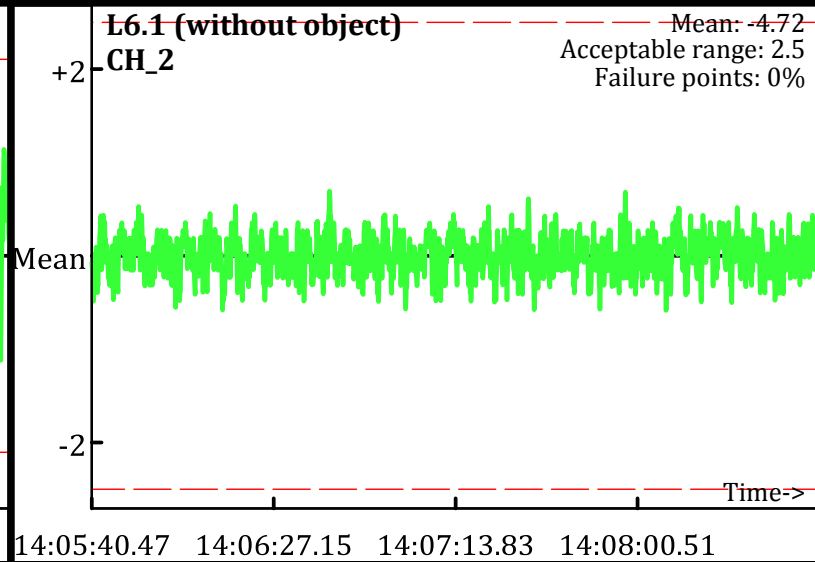Date: 7/31/2009

L6.1 (without object)
CH_3
Mean: 2.49
Acceptable range: 2.5
Failure points: 0%

L6.1 (without object)
CH_4
Mean: -2.81
Acceptable range: 2.5
Failure points: 0%

14:05:40.47   14:06:27.15   14:07:13.83   14:08:00.51

L7.1 (with object)
CH_3
Mean: 102.38
Acceptable range: 2.5
Failure points: 0%

L7.1 (with object)
CH_4
Mean: 47.46
Acceptable range: 2.5
Failure points: 0%

14:09:42.28   14:10:29.71   14:11:17.13   14:12:04.56

L8.1 (without object)
CH_3
Mean: 2.54
Acceptable range: 2.5
Failure points: 0%

L8.1 (without object)
CH_4
Mean: -2.9
Acceptable range: 2.5
Failure points: 0%

14:13:20.08   14:13:36.78   14:13:53.48   14:14:10.18   14:14

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L6.1 L7.1 L8.1

Page: 2

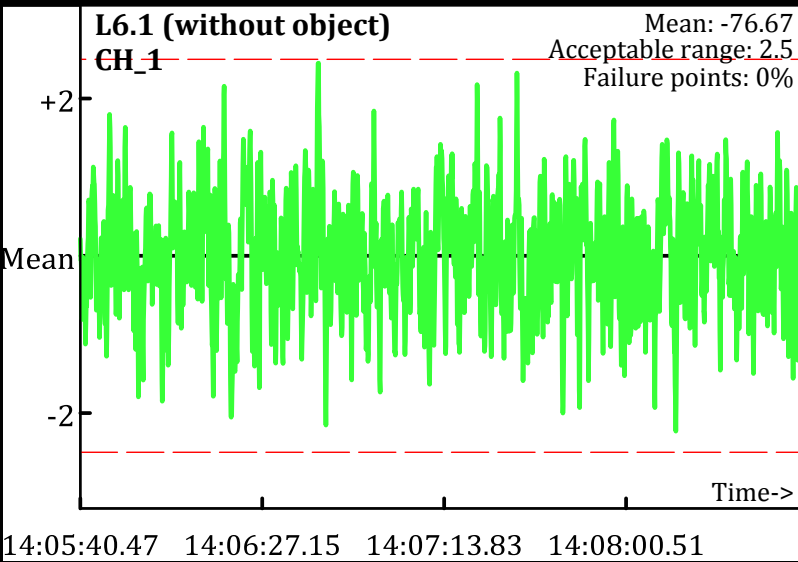# Static Calibration Test

Project: Fort Ord Parker Flats - Develpment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
--- Acceptable limits

PM test
Operator: SY & BS
Date: 7/31/2009
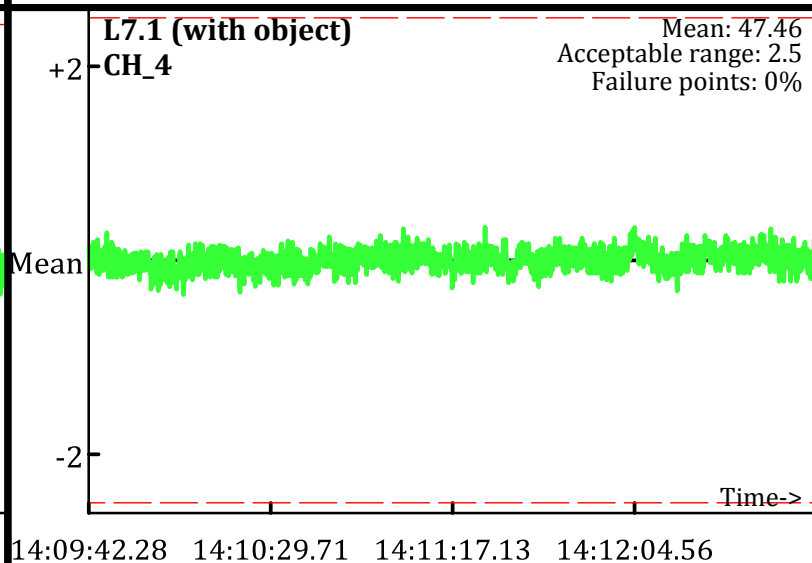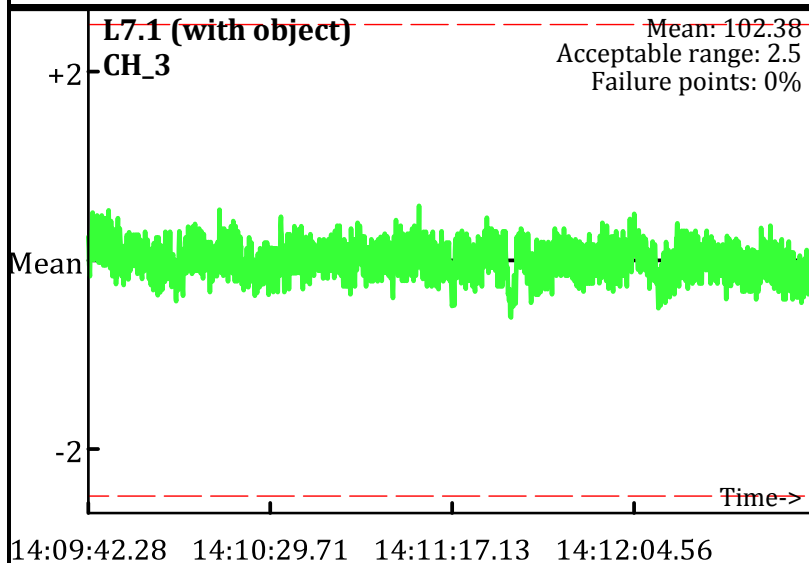
L6.2 (without object)
CH_1

Mean: -72.4
Acceptable range: 2.5
Failure points: 0%

L6.2 (without object)
CH_2

Mean: -0.41
Acceptable range: 2.5
Failure points: 0%

L7.2 (with object)
CH_1

Mean: 150.41
Acceptable range: 2.5
Failure points: 0%

L7.2 (with object)
CH_2

Mean: 159.53
Acceptable range: 2.5
Failure points: 0%

L8.2 (without object)
CH_1

Mean: -71.87
Acceptable range: 2.5
Failure points: 0%

L8.2 (without object)
CH_2

Mean: -0.25
Acceptable range: 2.5
Failure points: 0%

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
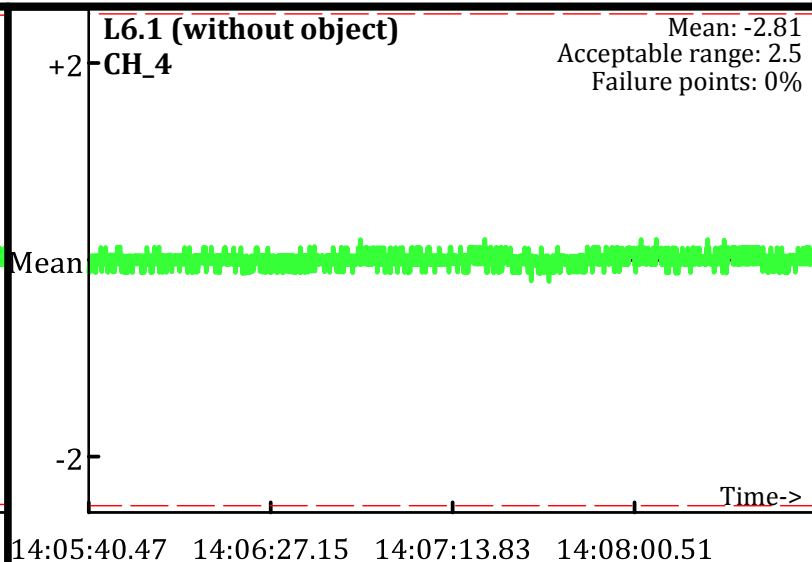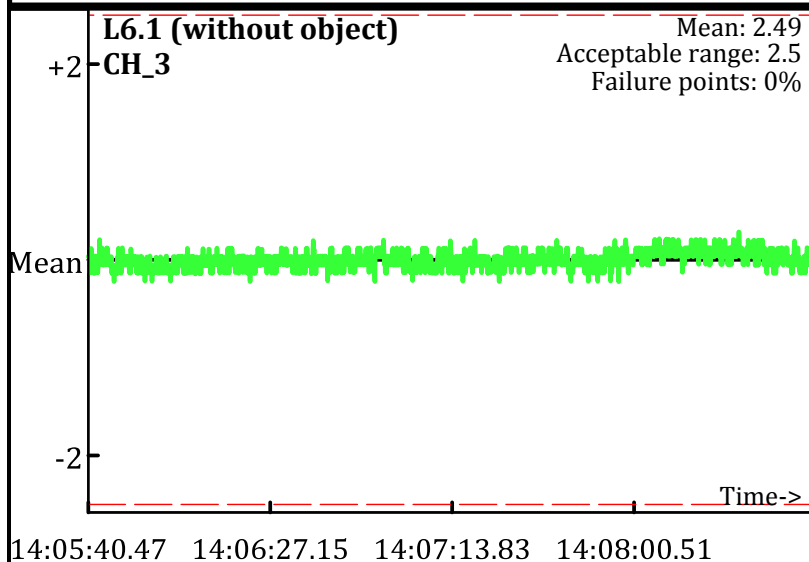Line Name: L6.2 L7.2 L8.2

Page: 1

Static Calibration Test

Project: Fort Ord Parker Flats - Develpoment Areas
Equipment: EM-61 Mark II
Grid/Location: QC Area

● Outside range
— — Acceptable limits

PM test
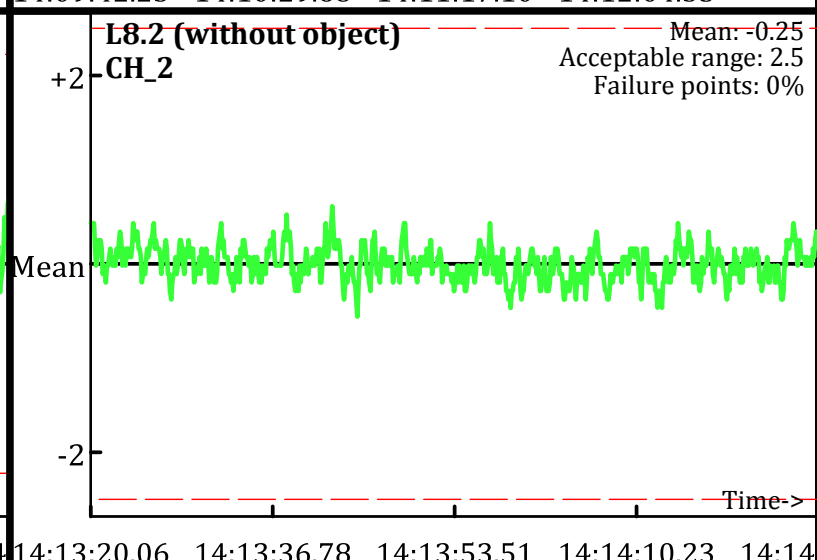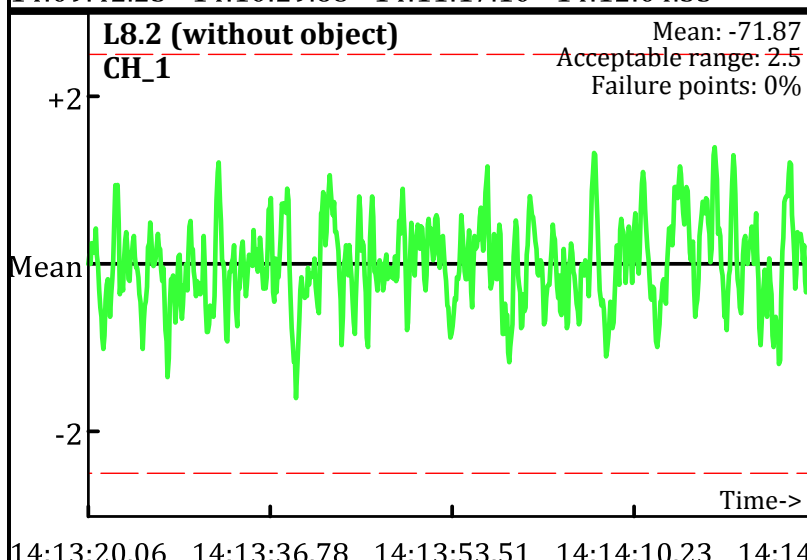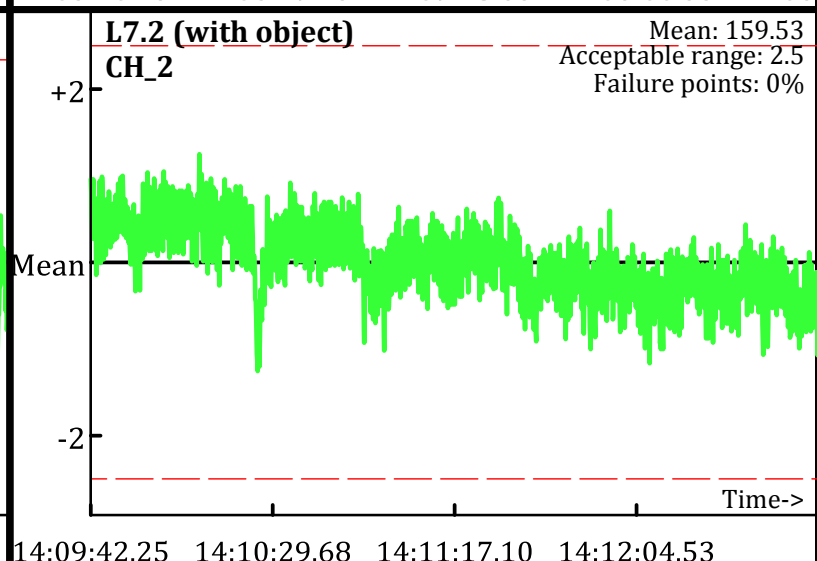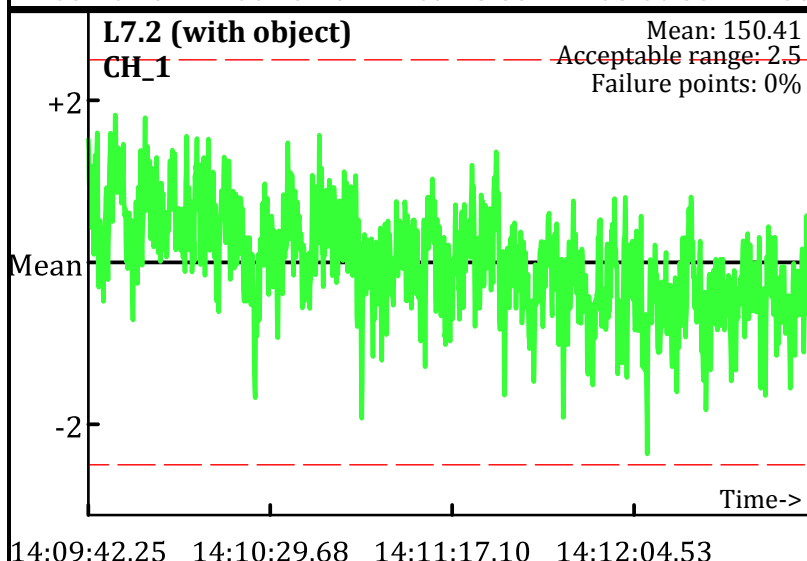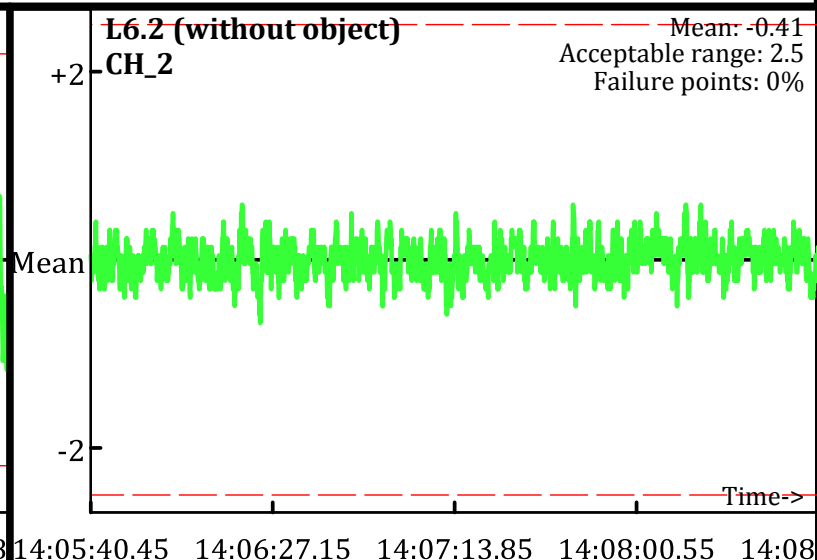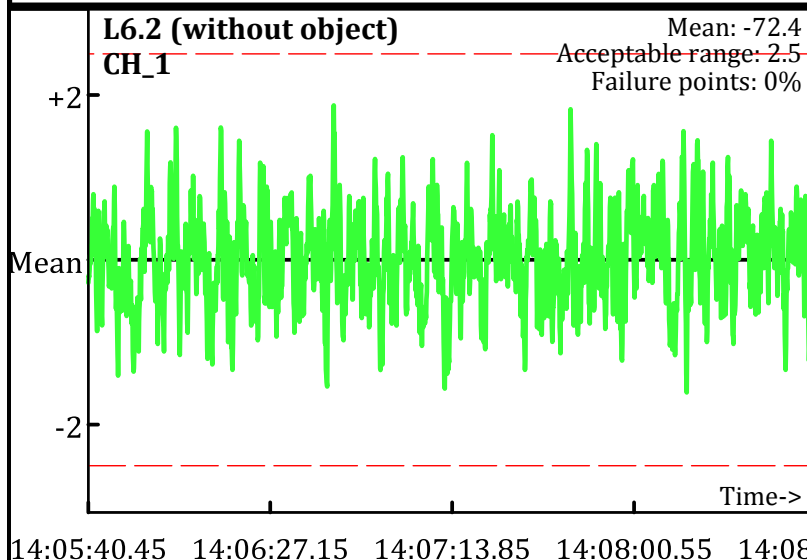Operator: SY & BS
Date: 7/31/2009

L6.2 (without object)
CH_3
Mean: 1.61
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:05:40.45   14:06:27.15   14:07:13.85   14:08:00.55   14:08

L6.2 (without object)
CH_4
Mean: -4.41
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:05:40.45   14:06:27.15   14:07:13.85   14:08:00.55   14:08

L7.2 (with object)
CH_3
Mean: 99.16
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:09:42.25   14:10:29.68   14:11:17.10   14:12:04.53

L7.2 (with object)
CH_4
Mean: 45.11
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:09:42.25   14:10:29.68   14:11:17.10   14:12:04.53

L8.2 (without object)
CH_3
Mean: 1.62
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:13:20.06   14:13:36.78   14:13:53.51   14:14:10.23   14:14

L8.2 (without object)
CH_4
Mean: -4.47
Acceptable range: 2.5
Failure points: 0%

+2

Mean

-2

Time->

14:13:20.06   14:13:36.78   14:13:53.51   14:14:10.23   14:14

Database: C:_QCReports_Ord_Data\073109\QC\073109_TA_QC.gdb
Line Name: L6.2 L7.2 L8.2

Page: 2